


CRL Cable Shelf Bracket Kit Installation Steps

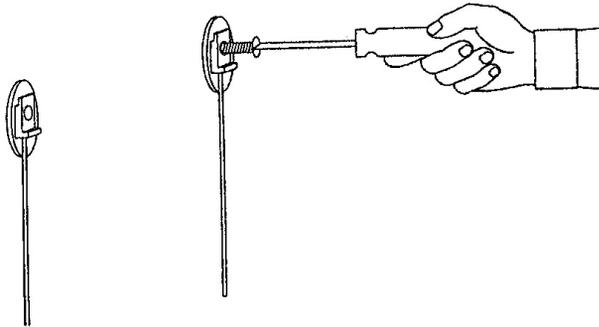

1. Choose Locations of Brackets:



Preferably on wall studs, and make level marks for screws. 40" (1016 mm) is the maximum span between Brackets.

2. Install Brackets to Wall:

On Stud: Pre-drill 1/8" (3 mm) hole, hold Wall Fitting in place with Round Back Plate as shown and screw in fastener supplied until fittings are tight to wall. 100 lb. (45 kg) weight capacity when properly installed.

Hollow Wall: Use a 3/16" x 3" (4.8 x 76.2 mm) toggle bolt. Put toggle bolt through Wall Fitting and Round Back Plate. Install and tighten until fittings are tight to wall. 75 lb. (34 kg) weight capacity when properly installed.

Cement or Other: Use proper fasteners. 100 lb. (45 kg) weight capacity when properly installed.

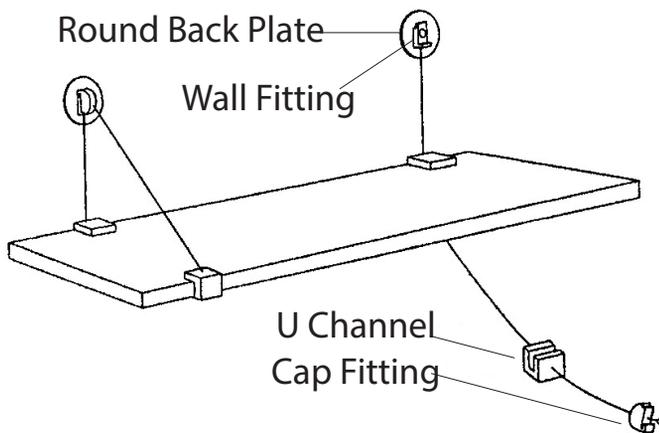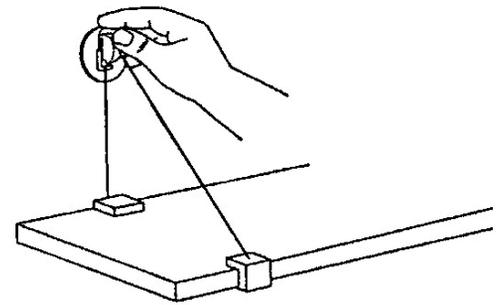

3. Hang Shelf:

Put U-Channels on back and front of shelf as shown, drop Cap Fitting onto Wall Fitting (make sure they are properly aligned and fitted). Level shelf (front to back) by pulling Cable from below and pushing the shelf down into place.

NOTE: The Peel and Stick Inserts supplied are used to decrease opening of U-Channels for use with thinner shelves. Apply them to inside Channels before hanging shelf.

Parts Included:

- Pair of Cable Shelf Brackets
- 2 Screws (for installation on wood stud)
- Round Back Plates
- Plastic Inserts
- 3/8" (10 mm) Tempered Glass

CAT. NO. 624K

6" x 24" Shelf Size

CAT. NO. 1024K

10" x 24" Shelf Size

CAT. NO. 1036K

10" x 36" Shelf Size