


USE OF GASKETS
FOR 5/16" (8mm) GLASS: USE ONE THICK GASKET ON EACH SIDE
FOR 3/8" (10mm) GLASS: USE ONE THIN GASKET ON EACH SIDE

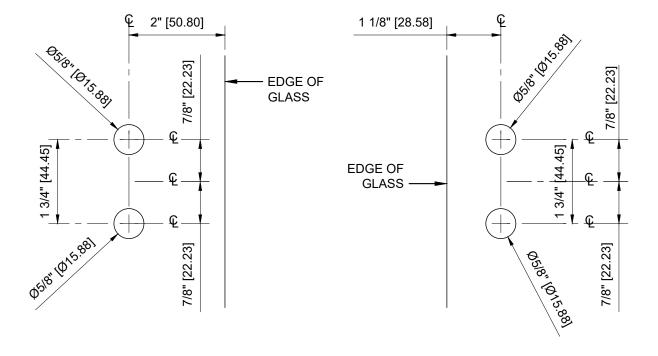

FIXED PANEL "A" GLASS FABRICATION TEMPLATE

DOOR PANEL "B"
GLASS FABRICATION TEMPLATE

9/9/19

CRL ZURICH SERIES HINGE

ZUR04 - GLASS TO GLASS MOUNT 90 DEGREE IN-SWING HINGE

C.R.LAURENCE CO. ARCHITECTURAL PRODUCTS 2503 E. Vernon Avenue, Los Angeles, C.A 90058-1897 PH (800)-421-6144 FX: 800-587-7501 www. calaurence.com

SCALE: DRAWN BY

CATALOG NUMBER	FINISH
ZUR04PS	P0LISHED STAINLESS
ZUR04BR	P0LISHED BRASS
ZUR04BN	BRUSHED NICKEL
ZUR04GP	GOLD PLATE
ZUR04PN	POLISHED NICKEL
ZUR04SS	BRUSHED STAINLESS