



INSTALLATION INSTRUCTIONS


CRL MLEDB2 ELECTRIC SOLENOID DEADBOLT

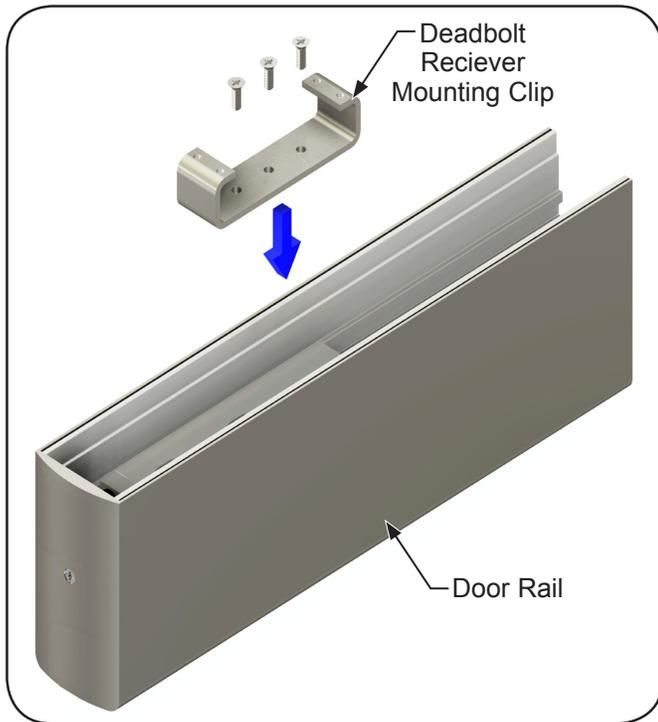


1. Attach the Deadbolt Receiver Mounting Clip to the Door Rail.

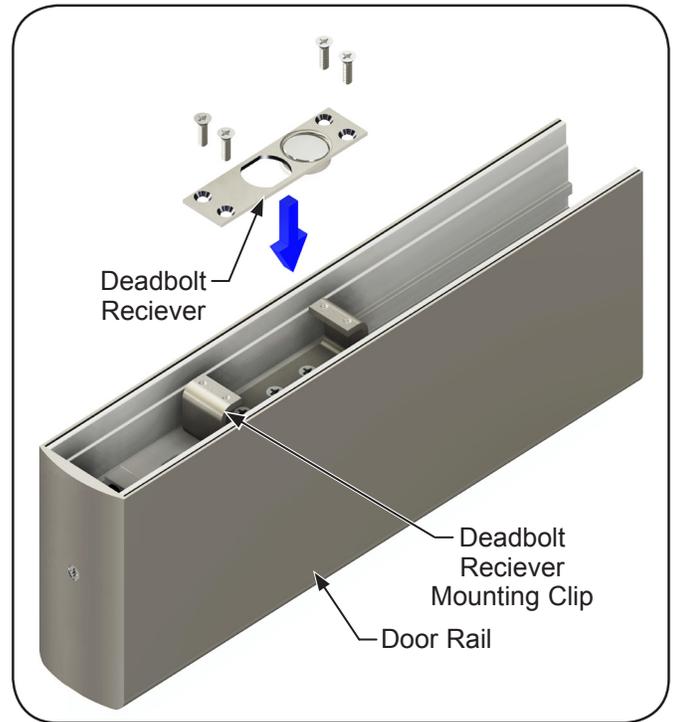

2. Attach the Deadbolt Receiver on to the Mounting Clip.

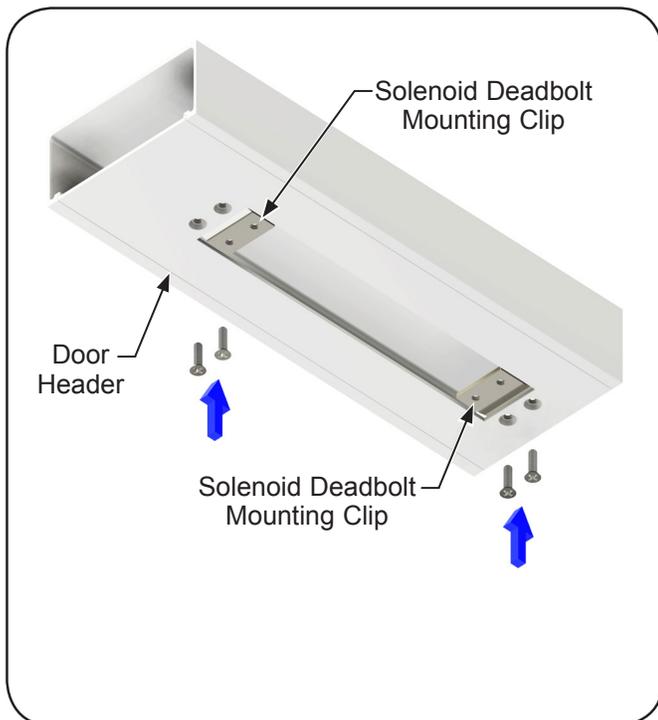

3. Attach the Solenoid Deadbolt Mounting Clips to the Door Header.

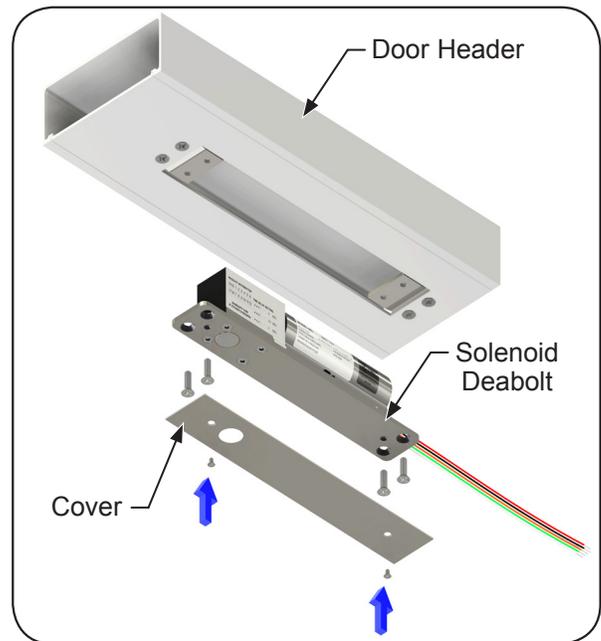

4. Properly wire the Solenoid Deadbolt according to the function required. Insert the Solenoid Deadbolt into the Header, secure the Deadbolt and Cover to the Mounting Clips.

VOLTAGE: 12VDC 0.9 Amp
 RED: positive (+)
 BLACK: Ground (-)

CURRENT: Activated 0.9 A
 Standby 0.3 A

FAIL SAFE MODE: Requires Power to Lock

SWITCH DATA: SPDT 1.0 Amp. 30V AC/DC

LOCK SENSOR: Indicates Bolt Locked or Unlocked
 BLUE: Normally Open
 WHITE: Common
 YELLOW: Normally Closed

DOOR SENSOR: Indicates Door Open or Closed
 GREEN: Normally Open
 GRAY: Common
 ORANGE: Normally Closed

