


C.R. LAURENCE CO. INC

Mounting Instructions Stainless Steel Shelves with Deal Tray

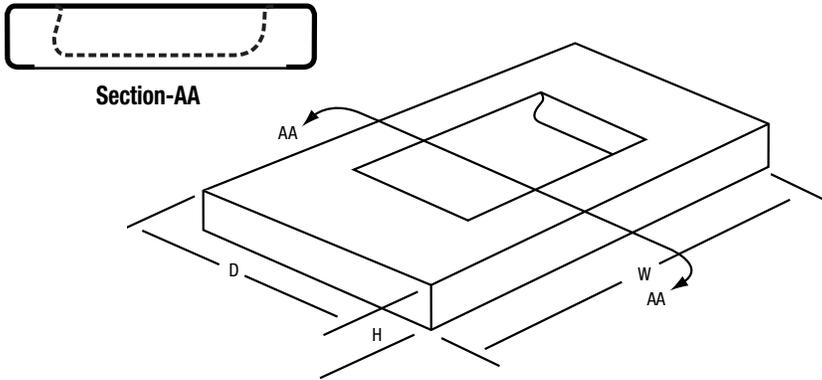


Stainless Steel Shelves with Deal Tray

CAT NO.	WIDTH	DEPTH	HEIGHT
SSDT2412	24"	12"	2"
SSDT3012	30"	12"	2"
SSDT3612	36"	12"	2"
SSDT4812	48"	12"	2"
SSDT6012	60"	12"	2"
SSDT7212	72"	12"	2"
SSDT2418	24"	18"	2"
SSDT3018	30"	18"	2"
SSDT3618	36"	18"	2"
SSDT4818	48"	18"	2"
SSDT6018	60"	18"	2"
SSDT7218	72"	18"	2"

WARNING: All Stainless Steel Shelves with Deal Tray include an easy-out radius on the customers side and a non-ricochet curve on the clerks side. Shelf must be installed as labeled to ensure proper protection is provided.

THROUGH-SHELF MOUNTING


Shelves can be mounted from the top by drilling and countersinking the shelf surface in the appropriate attachment area, then securing with screws of adequate length (not included). Additional strength can be obtained by applying a few beads of construction sealant, **CRL CAT. NO. M64** (select color), between the bottom of the shelf and the top of the supporting wall.



UNDER-SHELF MOUNTING

Shelves can be mounted from underneath by securing angle cleats or 2 x 2 boards to both sides of the wall. Mount boards or cleats even with the bottom of the opening. Install shelf and secure it from the underside using screws of adequate length (not included). Additional strength can be obtained by applying a few beads of construction sealant, **CRL CAT. NO. M64** (select color), between the bottom of the shelf and the top of the supporting wall.



Caution: When securing the shelf from underneath, do not attempt to use screws longer than 3/8" in the deal tray area.



MOUNTING USING OPTIONAL STAINLESS STEEL SHELF BRACKETS

Shelves can be mounted using optional stainless steel shelf brackets listed below. Secure the brackets to both sides of the wall, even with the bottom of the opening. Install the shelf and secure it from the underside using screws of adequate length (not included). Additional strength can be obtained by applying a few beads of construction sealant, **CRL CAT. NO. M64** (select color), between the bottom of the shelf and the top of the supporting wall.

Caution: When securing the shelf from underneath, do not attempt to use screws longer than 3/8" in the deal tray area.

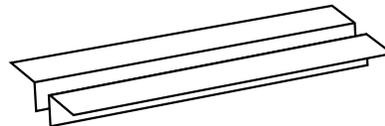

STAINLESS STEEL SHELF BRACKETS (OPTIONAL)

Stainless Steel Shelf Brackets are available in seven lengths from 24" to 96". They are made from 1-1/2" x 1-1/2" 16 gauge brushed stainless steel angle to match the shelf finish. Brackets are not drilled, so the installer has the option of drilling holes only where they are needed. Brackets are sold only in pairs.

Shelf Brackets

CAT NO.	LENGTH
SSSB24	24"
SSSB30	30"
SSSB36	36"
SSSB48	48"
SSSB60	60"
SSSB72	72"
SSSB96	96"



C.R. LAURENCE
OF NORTH AMERICA

Phone (800) 421-6144 Ext. 777 • Fax (800) 587-7501 • E-Mail techsales@crlaurence.com