




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

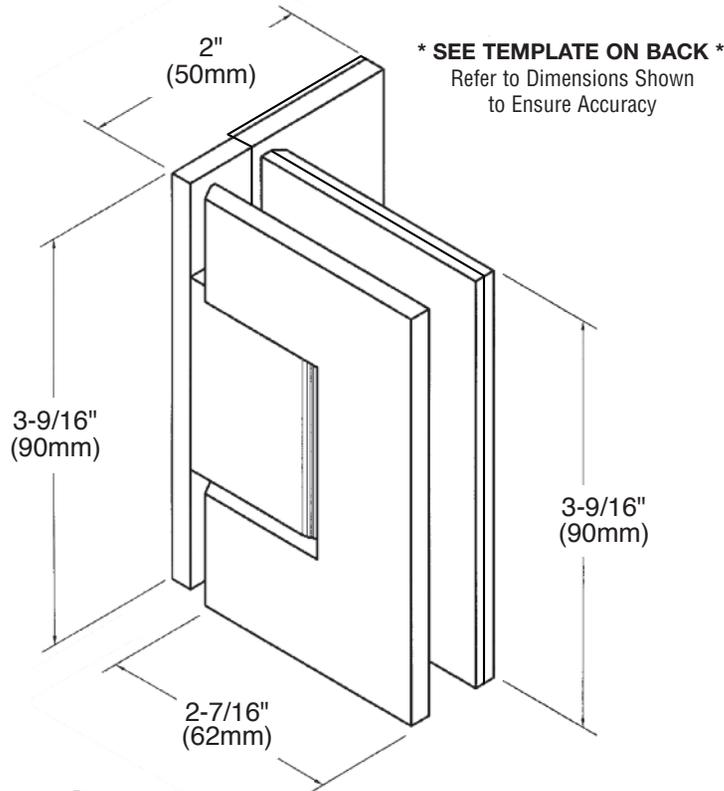

Important Information:

This hinge adjusts to accommodate a desired door angle up to 90°, after the door is installed. This is achieved by loosening the two Allen set screws (located in the center block), moving the door to the desired position, and then tightening the set screws. The self-centering position has now been changed to the angle you desire.

Specifications:

Glass Sizes: 5/16" (8mm) to 1/2" (12mm) thick tempered safety glass

Construction: Solid brass

Closing Type: Self-centering when within 15° of closed position

Cutout Required

Includes: Gaskets, screws and template

Use of Gaskets:

For 5/16" (8mm) Glass: Use two thick gaskets stamped with 8mm

For 3/8" (10mm) Glass: Use two gaskets stamped with 12-10mm

For 1/2" (12mm) Glass: Use two gaskets stamped with 12-10mm

Recommendations:

For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges.

Maintenance Guidelines:

- Our hinges are greased at the factory for quiet and trouble-free operation. If there is any squeaking that occurs after installation, put a drop of "3 in 1 Oil" (also known as "household oil") on the white nylon washer that the hinge body pivots on. This washer is the component that acts as a buffer, so the body of the hinge doesn't pivot directly on the brass center block. This solution doesn't require the disassembly of the hinge. **Note: Do not use spray lubricant on these hinges.** If the hinge has been disassembled, upon re-assembly, use white lithium grease to lubricate the interior mechanism.
- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

MELBOURNE

Wall Mount Adjustable Hinge
 Offset Back Plate (With Covers)

CAT. No. MEL324

*Maximum Door Capacities	5/16" (8mm) Glass		3/8" (10mm) Glass		1/2" (12mm) Glass	
	Weight	Width	Weight	Width	Weight	Width
Using 2 Hinges	100 lbs.(45 kg)	30"(762mm)	100 lbs.(45 kg)	30"(762mm)	100 lbs.(45 kg)	30"(762mm)
Using 3 Hinges	120 lbs.(54 kg)	34"(864mm)	120 lbs.(54 kg)	34"(864mm)	120 lbs.(54 kg)	34"(864mm)

*NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges.



C.R. Laurence Co., Inc.
 crlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.

© Copyright 2009, C.R. Laurence Co., INC_SDT21_U6 REV.08/16



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

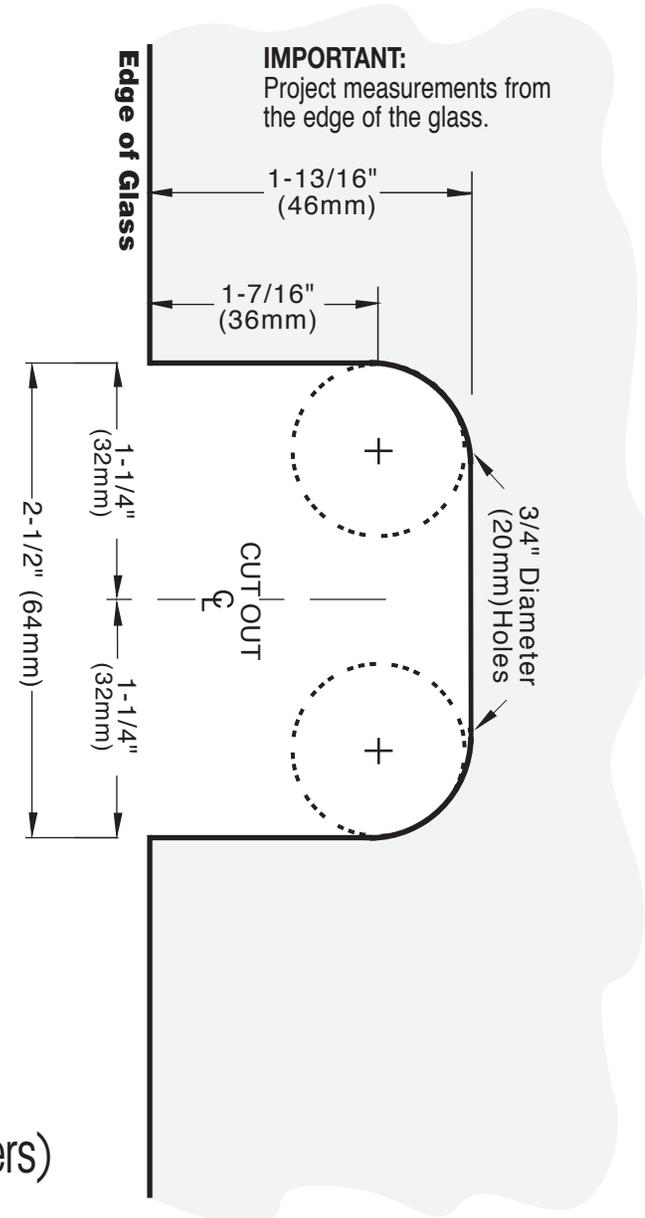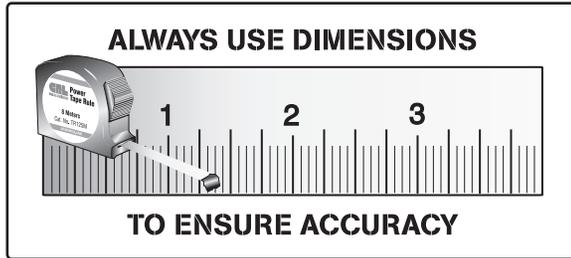

MELBOURNE

Wall Mount Adjustable Hinge – Offset Back Plate (With Covers)

CAT. No. MEL324

C.R. Laurence Co., Inc.
 crlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 458-7496.