

Building Glass Railing Systems Safer, Strong, with Brilliant Transparency

OFFICIAL TEST REPORT

For CRL's Laminated Glass Rail System

For CRL's 9/16" (13.52mm) Laminated Glass Railing System

Specifications: ASTM-E330, ASTM-E1996 (Impacts Only)

and ANSI Z-97.1





Fenestration Testing Laboratory, Inc.

8148 N.W. 74th Avenue Medley, FL 33166 Phone: 305/885/3328 Fax: 305/885/3329

e-mail: ftldade@aol.gom www.ftl-inc.com

Engineer: Mr. Jorge A Causo, P.E.

FL License Number: 54898

Cert. No: TST1657

Report Date: 6/22/2010

Completion Date: 5/19/2010

Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Project Number: 09-1892

MANUFACTURER: C.R. Laurence C.O. Inc.

SPECIFICATIONS: ASTM-E 330, ASTM-E 1996

(Impacts only), ANSI Z-97.1

ADDRESS:

2503 E. Vemon Avenue


PROJECT:

Florida Product Approval

Los Angeles, California 90058-1897

DESCRIPTION OF SAMPLE				
Model Designation:	Weld Block Dry Glazed Concrete Mount Aluminum Glass Glazed Railing System			
Overall Size:	15' - 1" (181") by 3' - 6" (42") high			
Sample A-1				

MATERIAL CHARACTERISTICS					
Members	Material**	Part Number**	Joint Type		
Cap Hand Rail:	stainless steel	** Part Number CRL GR20BS	none		
Glass Shoe Base:	6063-T52	** Part Number L56S10D	none		

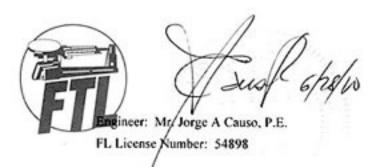

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010

Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Project Number: 09-1892

	Glazing		
Glazing Location	Glazing Material	Glazing Compound	Compound Color
All three lites of glass	*9/16" nominal laminated glass composed of *(2) 1/4" Temp Glass	None	None
Interlaying Film: 0.0	060" **DuPont SentryGlas Plus	Laminator: Oldcastle	
	Sample is pocket glazed system using a and a vinyl gasket between glass and ha ock clamping system which consists of ocking clamps between glass and alumi remaining on 12" centers.	nd rail. Glazed at bottom with a " L " shaped setting block a	CRL taper and taper
Daylight Opening	60" by 36" high		


Product Markings

None

	Additional Information	n	
Quantity and Type	Location	Method of Attachment	
One part number **CRL LR56PV vinyl gasket	between glass and hand rail	none	
One part number **CRL LTLSB setting block	between shoe base and glass	none	
One part number ** CRL TLSBP5 taper locking clamp	between shoe base and glass	none	
One part number ** CRL TLSGP5 taper locking clamp	between shoe base and glass	none	
One part number ** CRL TLSSP5 taper locking clamp	between shoe base and glass	none	

Sample Installation

The shoe base was fastened to the steel weld block part number **BSWB5 with a single row of number 1/2-13 by 3/4" long stainless steel socket head cap screws located 6 1/2" from each end and remaining on 12" center, the weld block was welded to a steel test fixture.

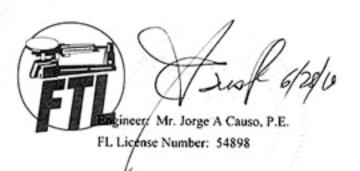

Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634


Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: A-1	Temperature: 74.3	3°F	Barometric Reading:	30.24 inches Hg
Title o	f Test	Pressure	Notes	
1/2 Structural Le	oad Test Positive Load	40.0 psf		
		Results	Passed	

Sample: A-1	Temperature: 75.	2°F	Barometric Reading: 30.30 inches Hg
Title o	Test	Pressure	Notes
1/2 Structural Le	oad Test Negative Load	40.0 psf	A 5255531 \ \
	7.1/1/1/	Results	Passed

Sample: A-1	Temperature:	74.3°F	OWNER Y	Barometric Reading:	30.24 inches Hg
Title o	f Test	100 × 1	Pressure	Notes	
Design Load Tes	st Positive Load	40.0	psf		



Reading#	Deflection	Permanent Set	Results	Add. Info
1	1.648"	N/A	Passed	
2	0.013"	0.005	Passed	
Actual N	lovement	Actual Set	Recovery	Add. Info
1) 1.648"		none	100%	



Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020


File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: A	1 Temperatu	re: 75.2°F	Baro	metric Reading:	30.30 inches Hg
Т	itle of Test	Pres	sure Not	es	
Design Loa	d Test Negative Loa	d 40.0 psf			
				•	
			②	1	
Reading#	Deflection	Permanent Set	Results	Add. Info	
Reading#	Deflection 2.135"	Permanent Set N/A		Add. Info	
Reading#			Results	Add. Info	
ı	2.135" 0.025"	N/A	Results Passed	Add. Info	

Sample: A-1	Temperature	: 74.3°F	Baron	metric Reading:	30.24 inches Hg
Title	of Test	Pressu	re Notes		
Uniform Struct	ural Test Positive	Load 80.0 psf			
Recovery: 1009	%			•	
			3	1	
Reading#	Deflection	Permanent Set	Results	Add. Info	
Reading#	Deflection 3.160"			Add. Info	

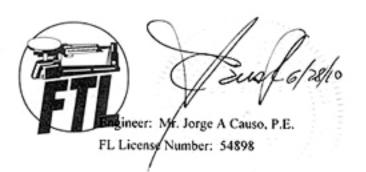

Report Date: 6/22/2010


Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: A-1	Temperature	: 75.2°F	Barometric Reading: 30.30 inches Hg
Title	Title of Test Pressure		
Uniform Struc	niform Structural Test Negative Load 80.0 psf		
Recovery: 100	%		①
Reading#	Deflection	Permanent Set	Results Add Info
Reading#	Deflection 3.187"	Permanent Set	Results Add. Info



5

6

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010

Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST DEPORT

Project Number: 00 1802

Sample: A-1	Temperature:	88.5°F	Barometric Read	Project Number: 09-1892 ling: 30.39inches Hg
Title of Test		Notes	Dan vincente aceae	ang. SV.Symenes rig
Large Missile In	npact Test			
Missile Weigh	nt	Missile		
9.25 pounds		2" by 4"	by 92" long	
Impact	Speed	Results	Add. Info	
1	50.1 ft/sec	Passed		
2	49.7 fl/sec	Passed		
	44.4.4.			
3	50.2 ft/sec	Passed		

Sample: A-I	Temperature: 74	4.2°F	Barometric Reading:	30.21 inches Hg
Title o	f Test	Results		
ANSIZ97.1		Passed		
1) Center of lef	t lite			
2) Center of cer	nter lite			
3) Center of rig	ht lite			


Passed

Passed

50.3 ft/sec

50.6 ft/sec

	DESCRIPTION OF SAMPLE
Model Designation:	Weld Block Dry Glazed Concrete Mount Aluminum Glass Glazed Railing System
Overall Size:	15' - 1" (181") by 3' - 6" (42") high
Sample A-2	



Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143


OFFICIAL TEST REPORT

MATERIAL CHARACTERISTICS				
Members	Material**	Part Number**	Joint Type	
Cap Hand Rail:	stainless steel	** Part Number CRL GR20BS	none	
Glass Shoe Base:	6063-T52	** Part Number L56S10D	none	

	Glazing		
Glazing Location	Glazing Material	Glazing Compound	Compound Color
All three lites of glass	*9/16" nominal laminated glass composed of *(2) 1/4" Temp Glass	None	None
Interlaying Film: 0.06	0" **DuPont SentryGlas Plus	Laminator: Oldcastle	
GI sha	mple is pocket glazed system using a azed at bottom with CRL taper lock of aped setting block and taper locking of ated 6" from each end and remaining	lamping system which consis lamps between glass and alur	ts of a " L "
Daylight Opening	60" by 36" high		

	Product Markings	
None		

Additional Information					
Quantity and Type	Location	Method of Attachment			
One part number **CRL LR56PV vinyl gasket	between glass and hand rail	none			
One part number **CRL LTLSB setting block	between shoe base and glass	none			
One part number ** CRL TLSBP5 taper locking clamp	between shoe base and glass	none			
One part number ** CRL TLSGP5 taper locking clamp	between shoe base and glass	none			
One part number ** CRL TLSSP5 taper locking clamp	between shoe base and glass	none			

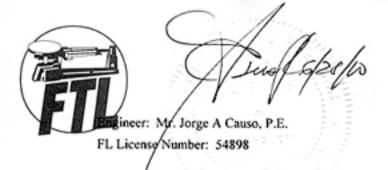

Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Project Number: 09-1892


Sample Installation

The shoe base was fastened to concrete test slab with a single row of No. 1/2 by 3 3/4" Hilti expansion bolt located 6" from each end and remainder on 6" centers.


Sample: B-1	Temperature: 84.	2°F	Barometric Reading: 30.27 inches	Hg
Title o	of Test	Pressure	Notes	
1/2 Structural L	oad Test Positive Load	40.0 psf		
	11111	Results	Passed	

Sample: B-1	Temperature: 75.0	0°F	Barometric Reading: 30.25 inches Hg
Title o	f Test	Pressure	Notes
1/2 Structural L	oad Test Negative Load	40.0 psf	/ [6] [6] / / / [6]
	1 / 1 / 1000 1000 / 1	Results	Passed

Sample: B-1	Temperature:	84.2°F		Barometric Reading:	30.27 inches Hg
Title o	of Test	Pr	sure	Notes	
Design Load Te	st Positive Load	40.0 psi	ENJE	/ / 1828 1838 / V	



Reading#	Deflection	Permanent Set	Results	Add. Info	
ı	3.878"	N/A	Passed		
2	0.330"	none	Passed		
Actual N	lovement	Actual Set	Recovery	Add. Info	
1) 3.878"		none	100 %		

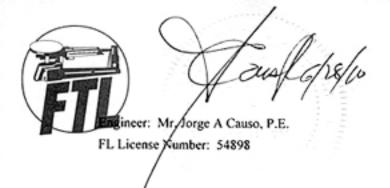

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010

Expiration Date: 5/19/2020


File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: B-	1 Temperatu	re: 75.0°F	Baro	metric Reading:	30.25 inches Hg
Ti	tle of Test	Press	ure Not	es	
Design Load	d Test Negative Loa	d 40.0 psf			
Reading#	Deflection	Permanent Set	Results	Add. Info	
Reading#	Deflection 4.125"			Add. Info	
Reading#		Permanent Set	Results	Add. Info	
1	4.125" 0.275"	Permanent Set N/A	Results Passed	Add. Info	

Sample: B-1	Temperature	: 76.1°F	Barometric Reading: 30.30 inches Hg	
Title	of Test	Pressur	re Notes	
Uniform Struc	tural Test Positive	.oad 80.0 psf	(
Recovery: 100	%			
			①	
Reading#	Deflection	Permanent Set	Results Add. Info	
Reading#	Deflection 4.090"	Permanent Set	Results Add. Info Passed	

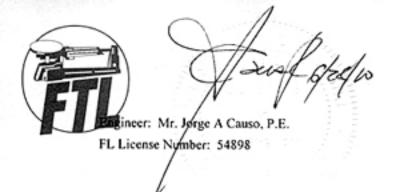

Report Date: 6/22/2010


Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: B-1	Temperature	: 76.1°F	Barometric Reading: 30.30 inches Hg		
Tit	e of Test	Pressu	Notes		
Uniform Stru	ctural Test Negative	Load 80.0 psf			
Recovery: 10	0%		•		
			(2)		
Reading#	Deflection	Permanent Set	Results Add. Info		
Reading#	Deflection 4.235"	Permanent Set	Results Add. Info Passed		

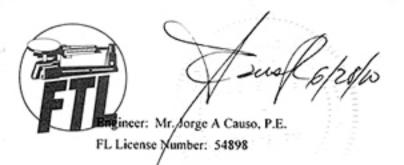

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010

Expiration Date: 5/19/2020 File Number: 09-634


Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: B-1	Temperature:	88.5°F	Barometric Reading:	30.39inches Hg
Title of Test		Notes		
Large Missile In	npact Test			
Missile Weigh	nt	Missile		
9.25 pounds		2" by 4" by 92"	long	
		0 0	0	
		The second secon		
Impact	Speed		Add. Info	
Impact	Speed 50.2 fl/sec			
Impact		Results A		
1	50.2 fl/sec	Results A Passed		
2	50.2 fl/sec 49.5 fl/sec	Results A Passed Passed		
2	50.2 fl/sec 49.5 fl/sec 50.1 fl/sec	Results A Passed Passed Passed		

Sample: B-1	Temperature:	73.9°F	Barometric Reading:	30.20 inches Hg
Title o	of Test	Results		
ANSIZ97.1		Passed		
1) Center of let	ît lite			
2) Center of ce	nter lite			
3) Center of rig	tht lite			

DESCRIPTION OF SAMPLE			
Model Designation:	Dry Glazed Concrete Mount Aluminum Glass Glazed Railing System		
Overall Size:	15' - 1" (181") by 4' - 0" (48") high		
Sample B-2			

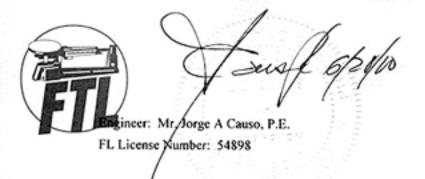

Cert. No: TST1657 Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143


OFFICIAL TEST REPORT

MATERIAL CHARACTERISTICS					
Members	Material**	Part Number**	Joint Type		
Cap Hand Rail:	stainless steel	** Part Number CRL GR20BS	none		
Glass Shoe Base:	6063-T52	** Part Number L56F10D	none		

	Glazing	11 1 1 1 STATES TO	7.
Glazing Location	Glazing Material	Glazing Compound	Compound Color
All three lites of glass	*9/16" nominal laminated glass composed of *(2) 1/4" Temp Glass	None	None
Interlaying Film: 0.06	0" **DuPont SentryGlas Plus	Laminator: Oldcastle	
Gl: sha	mple is pocket glazed system using a azed at bottom with CRL taper lock of aped setting block and taper locking of ated 6" from each end and remaining	lamping system which consist lamps between glass and alur	ts of a " L "
Daylight Opening	60" by 41 3/16" high	3 / / / / / / / / / / / / / / / / / / /	

	0.1.11.11	
	Product Markings	
None	111111111111111111111111111111111111111	

Reinforcement					
Quantity and Type	Location	Method of Attachment			
One part number **CRL LR56PV vinyl gasket	between glass and hand rail	none			
One part number **CRL LTLSB setting block	between shoe base and glass	none			
One part number ** CRL TLSBP5 taper locking clamp	between shoe base and glass	попе			
One part number ** CRL TLSGP5 taper locking clamp	between shoe base and glass	none			
One part number ** CRL TLSSP5 taper locking clamp	between shoe base and glass	none			

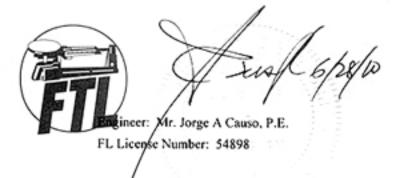

Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Project Number: 09-1892


Sample Installation

The shoe base was fastened to the steel tube with a single row of number 1/2-13 by 3/4" long stainless steel socket head cap screws located 6 1/2" from each end and remaining on 12" center, the steel tube was welded to a steel test fixture.


Sample: C-1	Temperature: 74.3°F		Barometric Reading: 30.24 inches Hg	
Title o	f Test	Pressure	Notes	
1/2 Structural L	oad Test Positive Load	40.0 psf		
		Results	Passed	

Sample: C-1	Temperature: 74.1	°F	Barometric Reading: 30.30 inches Hg		
Title o	of Test	Pressure	Notes		
1/2 Structural Lo	oad Test Negative Load	40.0 psf			
	A \ A \ \##############################	Results	Passed		

Sample: C-1	ple: C-1 Temperature: 74.3°F		11/100	Barometric Reading: 30.24 inches Hg	
Title o	of Test		Pressure	Notes	
Design Load Te	st Positive Load	- 4	40.0 psf	1 1 1 1 1 1 1 1 1	



Reading#	Deflection	Permanent Set	Results	Add. Info	
1	3 1/2"	N/A	Passed		
2	0.045"	0.005"	Passed		
Actual N	Movement	Actual Set	Recovery	Add. Info	
1) 3 1/2"		none	100%		

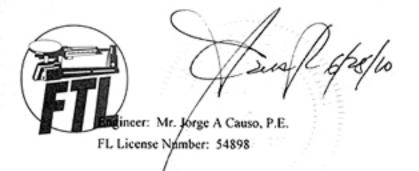

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010

Expiration Date: 5/19/2020


File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: C-	Temperatu	re: 76.4°F	Baro	metric Reading:	30.32 inches Hg
Ti	le of Test	Press	sure Not	es	
Design Load	Test Negative Load	d 40.0 psf			
Reading#	Deflection	Permanent Set	Results	Add. Info	
1	3 1/4"	Permanent Set N/A		Add. Info	
Reading# 1 2		Permanent Set	Results	Add. Info	
1	3 1/4" 0.056"	Permanent Set N/A	Results Passed	Add. Info	

Sample: C-1	Temperature	: 75.2°F	Barometric Reading: 30.12 inches Hg
Tit	le of Test	Pressur	re Notes
Uniform Stru	ctural Test Positive	Load 80.0 psf	
Recovery: 10	00%		•
Reading#	Deflection	Permanent Set	Results Add. Info
Reading#	Deflection 3.803"	Permanent Set	Results Add. Info Passed

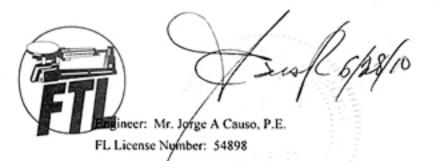

Report Date: 6/22/2010


Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: C-1	Temperature	: 74.6°F	Barometric Reading: 30.30 inches Hg
Title of Test Press			re Notes
Uniform Stru	ctural Test Negative	Load 80.0 psf	
Recovery: 10	0%		3
Reading#	Deflection	Permanent Set	Results Add. Info
Reading#	Deflection 3.875"	Permanent Set	Results Add. Info Passed

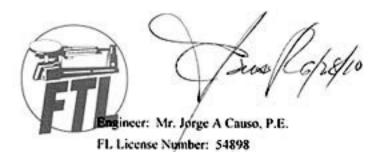

50.3 ft/sec

49.3 ft/sec

50.8 ft/sec

50.7 ft/sec

Passed

Passed

Passed

Passed

3

4

5

Cert. No: TST1657 Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143


		OFFIC	TAL TEST REPORT	Project	Number: 09-1892
Sample: C-1	Temperature:	79.3°F	Barometric	Reading:	30.34inches Hg
Title of Test		Notes			
Large Missile In	npact Test				
Missile Weigh	it	Missile			
9.25 pounds		2" by 4"	by 92" long		
Impact	Speed	Results	Add. Info		
1	50.2 ft/sec	Passed			

Sample: C-1	Temperature: °F		Barometric Reading: inches Hg	
Title	of Test	Results		
ANSIZ97.1		Passed		
1) Center of let	ft lite	The second second second second		
2) Center of ce	nter lite			
3) Center of rig	the lite			

opening 6" by 5/8" wide

opening 2" by 1/8" wide

DESCRIPTION OF SAMPLE				
Model Designation:	Dry Glazed Fascia Mount To Steel Aluminum Glass Glazed Railing System			
Overall Size:	15' - 1" (181") by 3' - 6" (42") high			
Sample C-2				

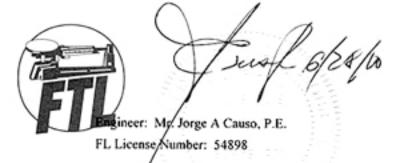

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010

Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143


OFFICIAL TEST REPORT

MATERIAL CHARACTERISTICS					
Members	Material**	Part Number**	Joint Type		
Cap Hand Rail:	stainless steel	** Part Number CRL GR20BS	none		
Glass Shoe Base:	6063-T52	** Part Number L56S10D	none		

	Glazing	17 / SHEERES / 17	
Glazing Location	Glazing Material	Glazing Compound	Compound Color
All three lites of glass composed of *(2) 1/4" Temp Glass		None	None
Interlaying Film: 0.06	0" **DuPont SentryGlas Plus	Laminator: Oldcastle	
GI sh	mple is pocket glazed system using a azed at bottom with CRL taper lock of aped setting block and taper locking of ated 6" from each end and remaining	lamping system which consis lamps between glass and alur	ts of a " L "
Daylight Opening	60" by 42" high	11/1/1/1/1/1	

	Product Markings	
None	5/1/1/1/1/	

Additional Information					
Quantity and Type	Location	Method of Attachment			
One part number **CRL LR56PV vinyl gasket	between glass and hand rail	none			
One part number **CRL LTLSB setting block	between shoe base and glass	none			
One part number ** CRL TLSBP5 taper locking clamp	between shoe base and glass	none			
One part number ** CRL TLSGP5 taper locking clamp	between shoe base and glass	none			
One part number ** CRL TLSSP5 taper locking clamp	between shoe base and glass	none			

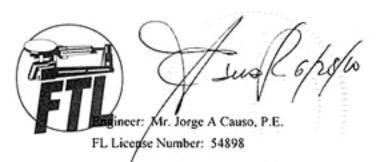

Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Project Number: 09-1892


Sample Installation

The shoe base was fastened to concrete test slab with a single row of No. 1/2 by 3 3/4" Hilti expansion bolt located 6 1/2" from each end and remainder on 6" centers.


Sample: D-1	Temperature: 66.	2°F	Barometric Reading: 30.24 inches Hg
Title o	of Test	Pressure	Notes
1/2 Structural Load Test Positive Load		40.0 psf	
		Results	Passed

Sample: D-1	1 Temperature: 59.9°F		Barometric Reading: 30.27 inches Hg		
Title o	f Test	Pressure	Notes		
1/2 Structural Load Test Negative Load		40.0 psf			
		Results	Passed		

Sample: D-1	Temperature:	66.2°F		Barometric Reading:	30.24 inches Hg
Title o	of Test	Z	Pressure	Notes	
Design Load Te	st Positive Load	40.	0 psf	Y CHEST STAN	



Reading#	Deflection	Permanent Set	Results	Add. Info
1	2.863"	N/A	Passed	
2	0.018"	none	Passed	
Actual N	lovement	Actual Set	Recovery	Add. Info
1) 2.863"		none	100 %	

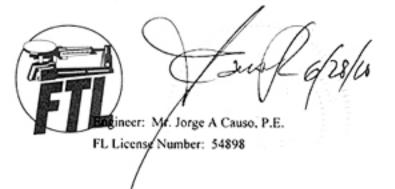

Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020


File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: D-	Temperatur	re: 59.9°F	Baro	netric Reading:	30.27 inches Hg
Title of Test Pressure			sure Not	es	
Design Load	Test Negative Load	d 40.0 psf			
			·	1	
Reading#	Deflection	Permanent Set	Results	Add. Info	
Reading#	Deflection 3.991*	Permanent Set		Add. Info	
Reading#			Results	Add. Info	
1	3.991* 0.037*	N/A	Results Passed	Add. Info	

Sample: D-1	Temperature	: 76.4°F	Barometric Reading: 30.32 inches Hg		
Title of Test Pressure			Notes		
Uniform Stru	ctural Test Positive	Load 80.0 psf			
Recovery: 10	0%				
Reading#	Deflection	Permanent Set	Results Add. Info		
1	3.126"	N/A	Passed		
	0.025"		L		

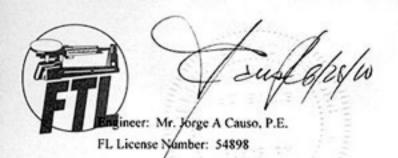

Report Date: 6/22/2010


Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

OFFICIAL TEST REPORT

Sample: D-1	ole: D-1 Temperature: 76.4°F		Baro	Barometric Reading: 30.32 inches Hg		
Title of Test Pressure			re Notes	Notes		
Uniform Struc	tural Test Negative	Load 80.0 psf				
Recovery: 100	%		•			
			@	h		
Reading#	Deflection	Permanent Set	Results	Add. Info		
Reading#	Deflection 4.321"			Add. Info		

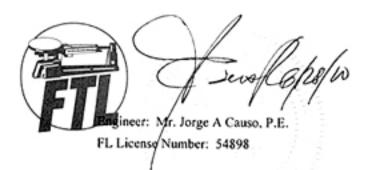

Cert. No: TST1657 Report Date: 6/22/2010 Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634


Lab. Number: 6143

OFFICIAL TEST REPORT


Sample: D-1	Temperature:	74.8°F	Barometric Reading:	30.25inches Hg
Title of Test		Notes		
Large Missile In	npact Test			
Missile Weigh	nt	Missile		
9 pounds		2" by 4" by 8	4" long	
		(3)		
Impact	Speed	Results	Add. Info	
1	50.5 ft/sec		Add. Info	
Impact		Results	Add. Info	
1	50.5 ft/sec	Results Passed	Add. Info	
2	50.5 ft/sec 51.2 ft/sec	Results Passed Passed	Add. Info	
2 3	50.5 ft/sec 51.2 ft/sec 50.8 ft/sec	Results Passed Passed Passed	Add. Info	

Sample: D-I	Temperature:	80.7°F	Barometric Reading:	30.31 inches Hg
Title o	of Test	Results		
ANSIZ97.1		Passed		
1) Center of lef	t lite			
2) Center of cer	nter lite			
3) Center of rig	ht lite			

DESCRIPTION OF SAMPLE				
Model Designation:	Dry Glazed Concrete Fascia Mount Aluminum Glass Glazed Railing System			
Overall Size:	15' - 1" (181") by 3' - 6" (42") high			
Sample D-2				

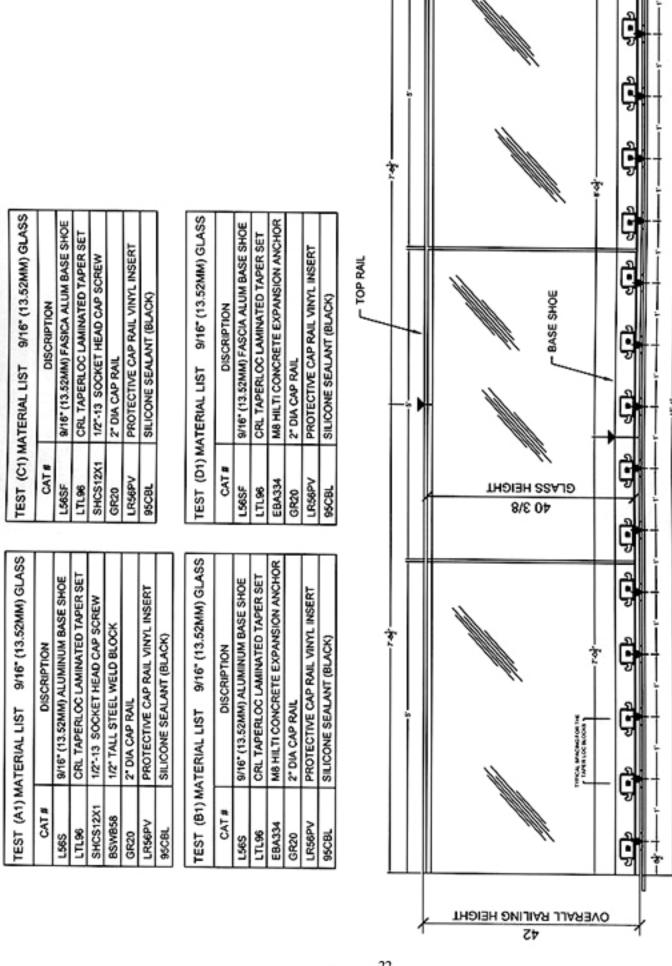

TYPICAL ELEVATION AT TEST A-1, B-1, C-1, & D-1

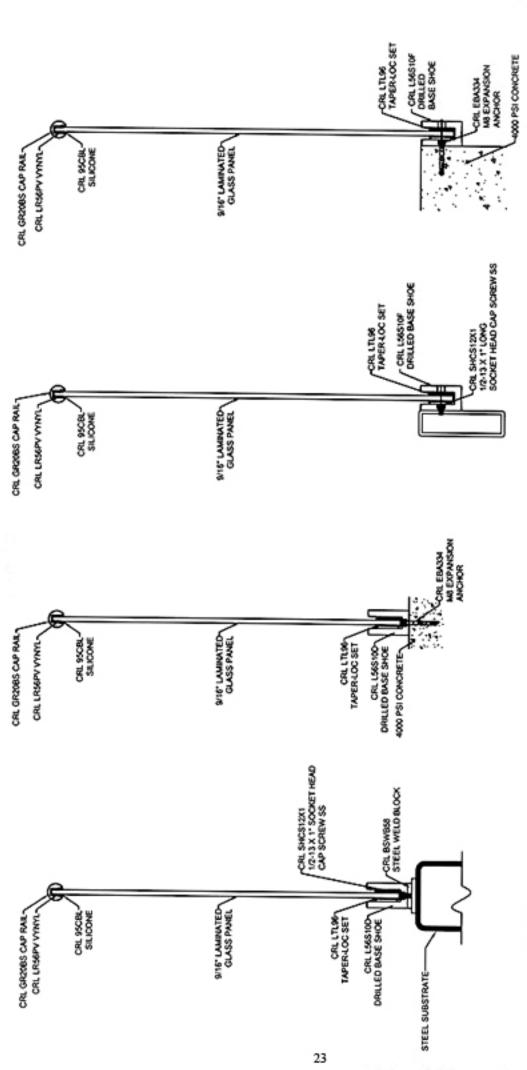

TEST C-1

CRL 9/16" LAMINATED GLASS RAIL SYSTEM #L56S10F 9/16" FASCIA MNT BASE SHOE ATTACHED TO STEEL

CRL 9/16" LAMINATED GLASS RAIL SYSTEM #L56S10D 9/16" SURFACE MNT BASE SHOE ATTACHED TO CONCRETE

TEST B-1

TEST D-1

CRL 9/16" LAMINATED GLASS RAIL SYSTEM #L56S10F 9/16" FASCIA MNT BASE SHOE ATTACHED TO CONCRETE

TEST A-1

CRL 9/16" LAMINATED GLASS RAIL SYSTEM #L56\$10D 9/16" SURFACE MNT BASE SHOE ATTACHED TO STEEL WELD BLOCK



Report Date: 6/22/2010

Completion Date: 5/19/2010 Expiration Date: 5/19/2020

File Number: 09-634

Lab. Number: 6143

-00

Project Number: 09-1892

OFFICIAL TEST REPORT

Notes

- designates measurements by laboratory
- ** as per manufacturer

At conclusion of ASTM E330 test and ANSI Z-97 drop test, there was no apparent damage to concrete test slab, glass and fasteners. At the conclusion of ASTM E1996 large missile test, the glass did break but remained intact and no shear or opening which a 3" diameter solid sphere could pass freely through.

The test specimens were covered with a 6 mil plastic sheeting to seal from air leakage when load test were conducted, however this had no effect on the above test results.

Remarks

Representative samples of the test specimens and detailed drawings will be retained by Fenestration Testing Laboratory for a period of five years from the original test date, and test report for a period of ten years. Due to the code cycle change of four years, it is recommended that this report be evaluated during the lifespan of this document.

This product was tested and meets the requirement set forth by the Florida Building Code (2007) TAS 201 large missile and ASTM E330. Sample A-1, B-1, C-1 and D-1 don't meets Section 1620.2 of this code. This product was tested in accordance with ANSI Z-97.1 section 1618.4.6.3.

Testing was conducted as per instructions received from your company representative.

Witnessed by:

Mr. Jorge A. Causo, P.E.

Mr. Abe Armenteros, C.R. Laurence

FENESTRATION TESTING LABORATORY, INC.

Manny lancez

Mr. Manny Sanchez

Chief Executive Officer



BUILDING CODE COMPLIANCE OFFICE (BCCO) PRODUCT CONTROL DIVISION MIAMI-DADE COUNTY, FLORIDA METRO-DADE FLAGLER BUILDING 140 WEST FLAGLER STREET, SUITE 1603 MIAMI, FLORIDA 33130-1563 (305) 375-2901 PAX (305) 372-6339 WWW.miamidade.gov/buildingcode

NOTICE OF ACCEPTANCE (NOA)

E.I. DuPont de Nemours & Co., Inc.

8480 DuPont Road

Washington, WV 26181

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: DuPont SentryGlas® Plus

APPROVAL DOCUMENT: Drawing No.319.58, sheet 1 of 1, titled "DuPont Sentryglass® Plus Interlayer" dated 10/01/07, prepared by B.I. DuPont DeNemours & Co., Inc., signed and sealed by Allan A. Kozich, P.B., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: None. This approval does not include an evaluation of structural performance of this component. Test reports and other required documents shall be submitted to Dade County Product Control; showing that the systems using this interlayer sheet will resist the loads according to Chapter 16 of the P.B.C., in order to issue a specific product approval for the system.

LABELING: Laminated lites under this Product Approval shall be permanently marked in a corner of the glass with: "DCA-SGP", standing for "Miami-Dade County Approved - SentryGlas Plus", and the laminator's identification mark. These marks shall be applied by the individual laminator producing the finished laminated glass product containing the SentryGlas® Plus lonoplast interlayer.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews and revises NOA # 06-1205.10 and consists of this page, evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.

12/107

NOA No: 07-1116.04 Expiration Date: January 14, 2012 Approval Date: January 3, 2008

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

A. DRAWING

 Drawing No. 319.58, sheet 1 of 1, titled "DuPont Sentryglass® Plus", dated 10/01/07, prepared by E.I. DuPont DeNemours & Co., Inc., signed and sealed by Allan A. Kozich, P.E.

B. TEST REPORTS

	Laboratory Report	Test	Date	Signature
1.	3136116SAT-001	ASTM D 635	10/25/07	Chris Bowness, P.B.
2.	3111755SAT-002	ASTM D1929	01/02/07	Chris Bowness, P.B.
3.	3111755SAT-001	ASTM B 84	12/19/06	Chris Bowness, P.B.
4.	PRI06246	ASTM G 26	06/26/07	Duc T. Nguyen, P.B.
5.	PR106246	ASTM D 790	06/26/07	Duc T. Nguyen, P.E.

C. CALCULATIONS

None

D. MATERIAL CERTIFICATIONS

None

E. OUALITY ASSURANCE

Miami Dade Building Code Compliance Office (BCCO)

F. STATEMENTS

- Letter of No Financial Interest by R. B. Fisher & Associates, Inc., issued on 12/12/98, signed and scaled by W. M. Meyers, PE.
- Letter of Code Compliance by R. B. Fisher & Associates, Inc., issued on 12/12/98, signed and scaled by W. M. Meyers, PB.
- Letter of No Financial Interest by C. A. Smith of B. I. DuPont DeNemours & Co., Inc., issued on 12/18/98, signed and notarized by C. A. Smith.
- Approved listing of SentryGlas® Plus laminators dated November 30, 2005, signed by Jeffrey D. Granato. (Evidence Submitted under NOA # 06-1205.10)


G. OTHERS

 No change letter issued by B.I. DuPont de Nemours & Co., Inc., dated 11/01/07, signed by C. Anthony Smith, Ph.D.

> Carlos M. Utrera, P.B. Product Control Examiner NOA No 07-1116.04

Expiration Date: January 14, 2012 Approval Date: January 3, 2008

DUPONT SENTRYGLAS®PLUS INTERLAYER



PRODUCT DESCRIPTION

MANUFACTURED BY: E.I. DUPONT DE NEMOURS & CO., INC. DESCRIPTION: A PLASTIC INTERLAYER MATERIAL WHICH IS FACTORY LAMINATED TO A MINIMUM OF TWO PIECES OF GLASS.

A TYPICAL GLAZING IS MADE OF THE FOLLOWING COMPONENTS: (MINIMUM THICKNESS INDICATED. MULTIPLE PLIES OF INTERLAYER TO BE USED AS NECESSARY).

A B C SECTION

Α		1/8" (3.0 mm) Annealed Glass
8	-	0.030" (0.76 mm) DuPont SentryGlas@Plus Interlayer
С		1/8* (3.0 mm) Annealed Glass

MATERIAL CHARACTERISTICS SentryGlas®Plus Interlayer

Designation	Test	Properties	
Flame Spread Index	ASTM E84	35	
Smoke Developed Index	ASTM E84	250	
Flash Ignition Temperature	ASTM D1929	788 F	
Self Ignition Temperature	ASTM D1929	806 F	
Average Extent of Burning [1]	ASTM D635	0 cm/mln.; Class C1	
Average Extent of Burning [2]	ASTM D635	0 cm/mln.; Class C1	
Average Modulus of Rupture	ASTM D790	Weathering*	
WEATHERING PER SEC		Before	After
THE FLORIDA BUILD	ING CODE	5,415 psl	5,366 psl

NOTES

- [1] 30 mil (0.76mm) Ihlckness DuPont SentryGlas@Plus Interlayer Sample
- [2] 120 mil (3.3mm) Ihickness DuPont SentryGlas@Plus Interlayer Sample
- [3] DuPont SentryGlas@Plus Interlayer By Itself Does Not Comply With The Florida Building Code

THIS IS A COMPONENT APPROVAL AND DOES NOT INCLUDE AN EVALUATION OF STRUCTURAL PERFORMANCE OF THIS COMPONENT. SYSTEMS INCORPORATING THIS COMPONENT SHALL APPLY FOR A PRODUCT APPROVAL TO THIS OFFICE AND SHALL SUBMIT REPORTS AND OTHER REQUIRED DOCUMENTS SHOWING THAT THE SYSTEM USING THIS COMPONENT WILL RESIST THE LOADS ACCORDING TO CHAPTER 16 OF THE FLORIDA BUILDING CODE.

07-1116-04 01/14/2012

alla a. Kzs

NOV 0 5 2007

<u>DuPont SentryGlas® Plus</u> Interlayer

E.I. DuPont de Nemours & Co., Inc. 8480 DuPont Road

Washington, West Virginia 26181

Phone: 304-863-2182 Dwg. # 319.58 Sheet 1 of 1

Drawing Date: 10/1/07 Allan A. Kozich, PE Registration # 16864



Fenestration Testing Laboratory, Inc.

8148 N.W. 74th Avenue Medley, FL 33166 Phone: 305/885/3328 Fax: 305/885/3329 e-mail: ftldade@aol.com www.ftl-inc.com

6/28/10

RE: Letter Certifying Independence

Client: C.R. Laurence C.O. Inc.

Address: 2503 E. Vemon Avenue Los Angeles, California 90058-1897

Model Designation: Weld Block Dry Glazed Concrete Mount Aluminum Glass

Glazed Railing System

Laboratory Number: 6143

To whom it may concern:

Fenestration Testing Laboratory certifies the following:

- Fenestration Testing Laboratory, nor it's company representatives, have any financial interest in the above referenced company
- Fenestration Testing Laboratory, nor it's company representatives, have any controlling interest in the above referenced company
- The above referenced company is not affiliated to Fenestration Testing Laboratory, nor it's company representatives

If you have any questions, please do not hesitate to contact us at (305) 885-3328.

Sincerely,

Fenestration Testing Laboratory, Inc.

Manny Sanchez

Chief Executive Officer