

VIENNA

Wall Mount Hinge-Short Back Plate

CAT. NO. V1E074

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

C.R. Laurence Co., Inc. • 2503 E. Vernon Ave., Los Angeles, CA 90058 • 1.800.421.6144 • crlaurence.com

Important Information:

1) The Cat. No. V1E074 Short Back Plate Vienna Wall Mount Hinge offers two different templates. The regular Clearance Template allows 1/4" (6mm) to 5/16" (8mm) clearance. The Tight Clearance Template allows for a tighter clearance of 1/8" (3mm) to 3/16" (5mm), and is commonly used on installations where vinyl seals are not being used.

2) This Hinge contains a dual degree pivot pin. The pivot pin is set for normal door closing position. You have the option of altering the closing position of the door 5 degrees inward by utilizing the opposite side of the pivot pin, which has been pre-machined. Special order custom pivot pins are available (Cat.No. V1EPIN) that can be machined at any angle up to 45 degrees.

3) The Vienna Hinge is designed to accommodate two types of cut-outs in the glass. If the two steel pins in the body of the Hinge are left in place, the "mouse ear" cut-out option should be used. This application is recommended to prevent slippage. If the two steel pins are removed, the rectangular cut-out option can be utilized.

Specifications:

Glass Sizes:	3/8" (10mm) to 1/2" (12mm) thick tempered safety glass	
Construction:	Solid brass	
Closing Type:	Self-centering when within 15° of closed position	
Cutout Required		
Includes:	Gaskets, screws and template	

Maximum Door Capacities for Two Hinges or Three Hinges

Maximum Door Weight:	100 lbs.(45 kg)	130 lbs.(59 kg)
Maximum Door Width:	34"(864mm)	34"(864mm)

Use of Gaskets:

For 3/8" (10mm) Glass: Use one thick gasket on each side

For 1/2" (12mm) Glass: Use one thin gasket on each side



Recommendations:

For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges.

Maintenance Guidelines:

- Our hinges are greased at the factory for quiet and trouble-free operation. If there is any squeaking that occurs after installation, put a drop of "3 in 1 Oil" (also known as "household oil") on the white nylon washer that the hinge body pivots on. This washer is the component that acts as a buffer, so the body of the hinge doesn't pivot directly on the brass center block. This solution doesn't require the disassembly of the hinge. **Note: Do not use spray lubricant on these hinges.** If the hinge has been disassembled, upon re-assembly, use white lithium grease to lubricate the interior mechanism.
- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

IMPORTANT: Project measurements from the edge of the glass.

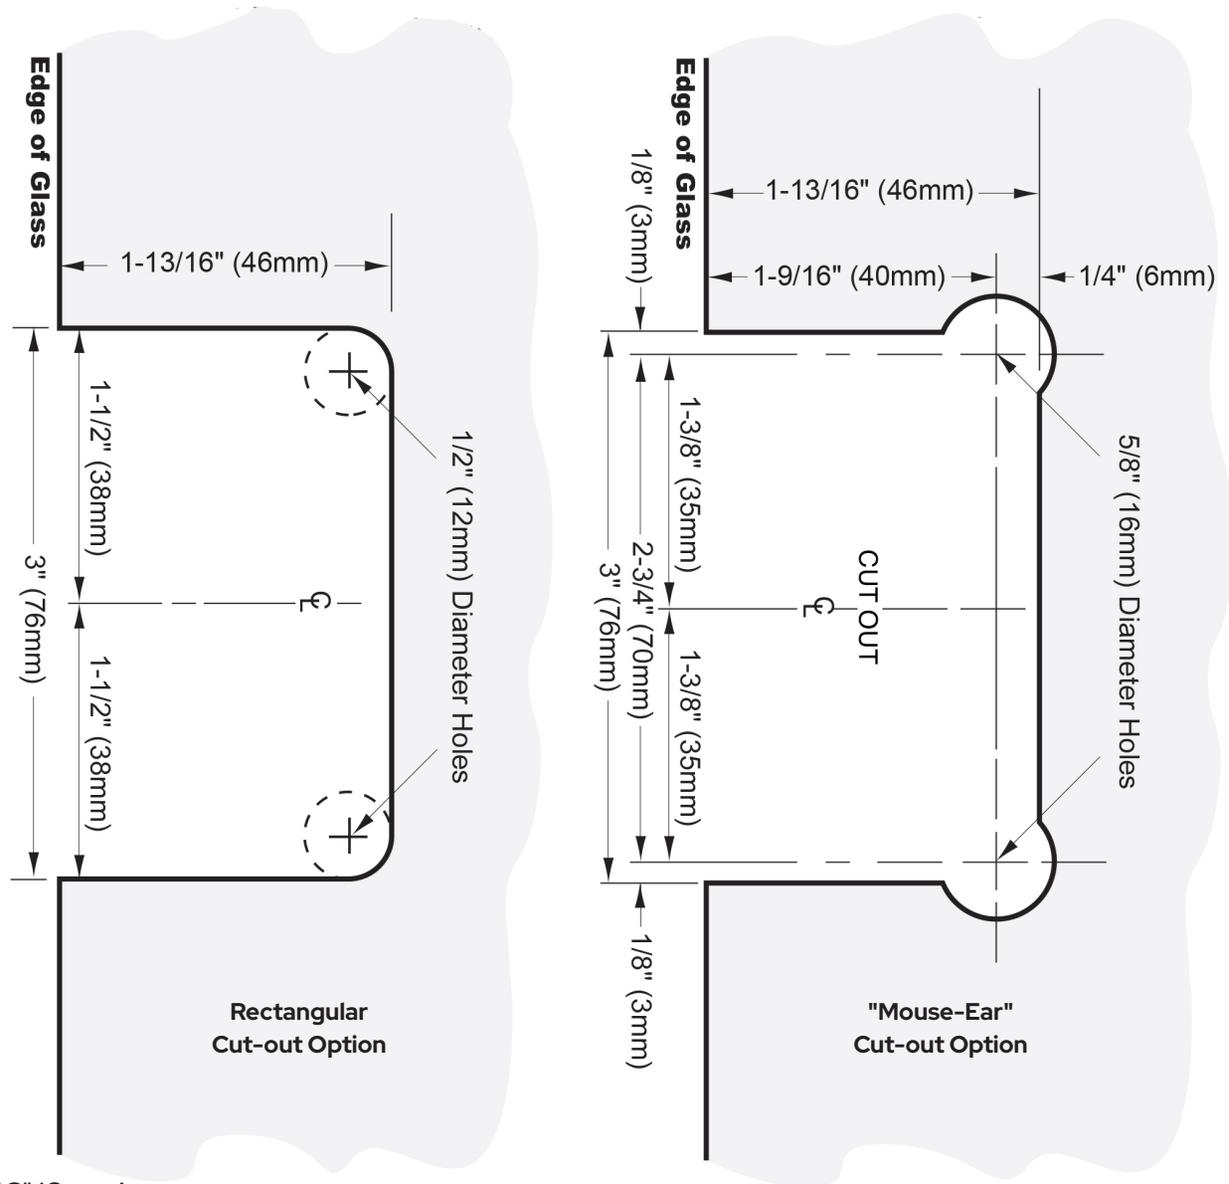


VIENNA

Wall Mount Hinge-Short Back Plate

CAT. NO. V1E074

Regular Clearance Template 1/4" (6mm) to 5/16" (8mm)

IMPORTANT: Project measurements from the edge of the glass.

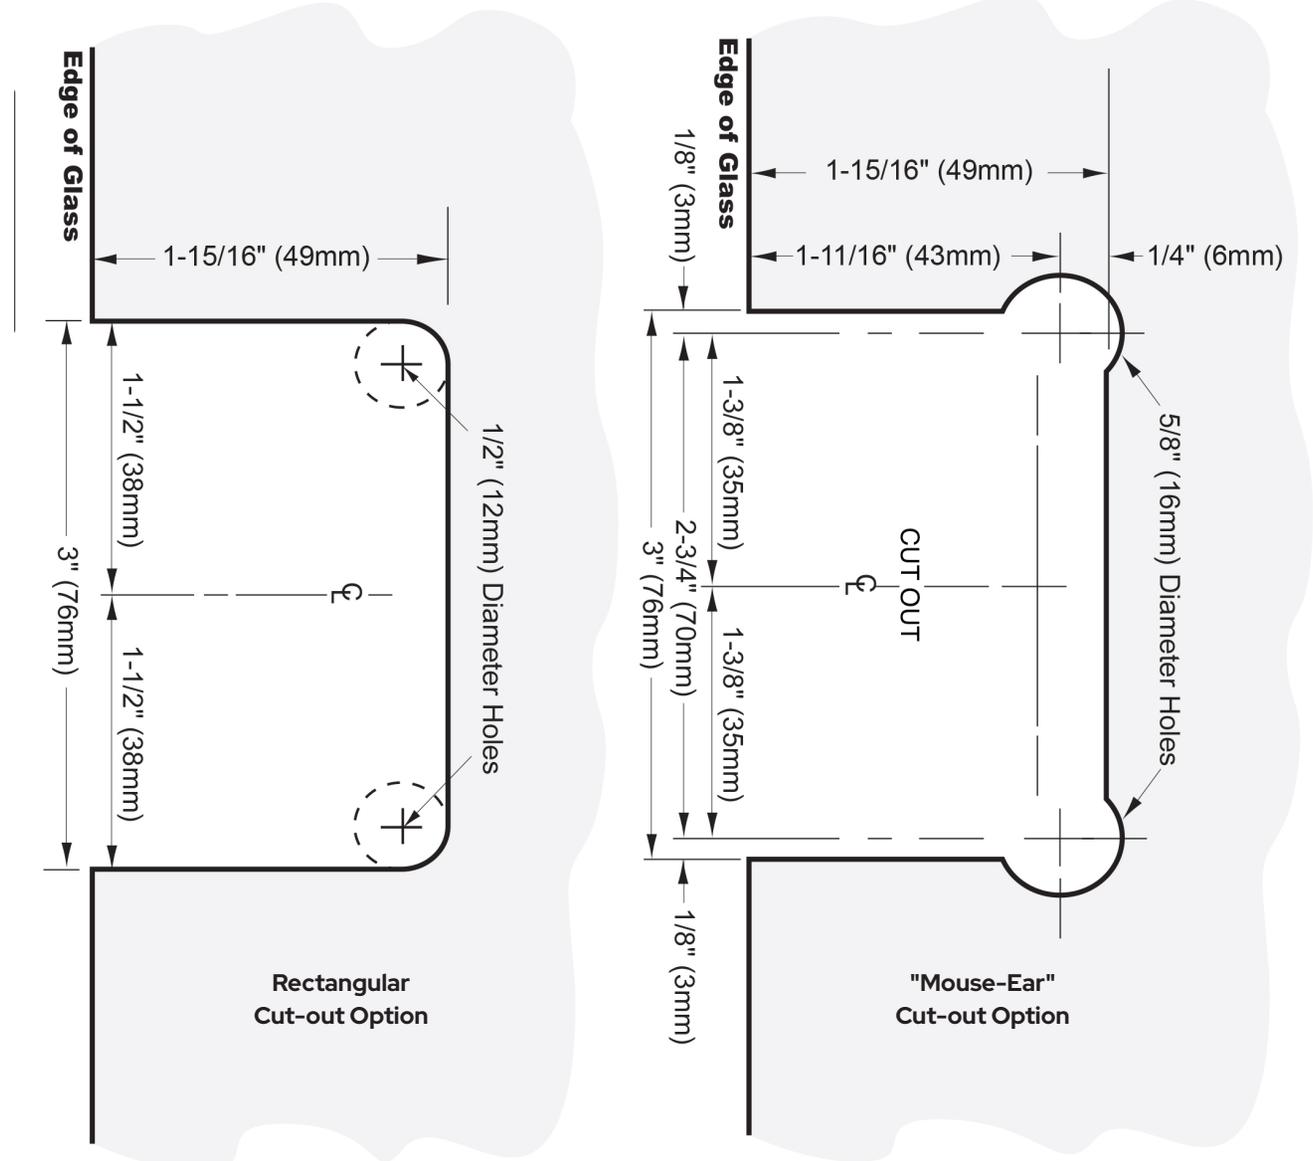

 ALWAYS USE DIMENSIONS TO ENSURE ACCURACY

VIENNA
 Wall Mount Hinge-Short Back Plate
 CAT. NO. V1E074
 Tight Clearance Template 1/4"(6mm) to 5/16"(8mm)