



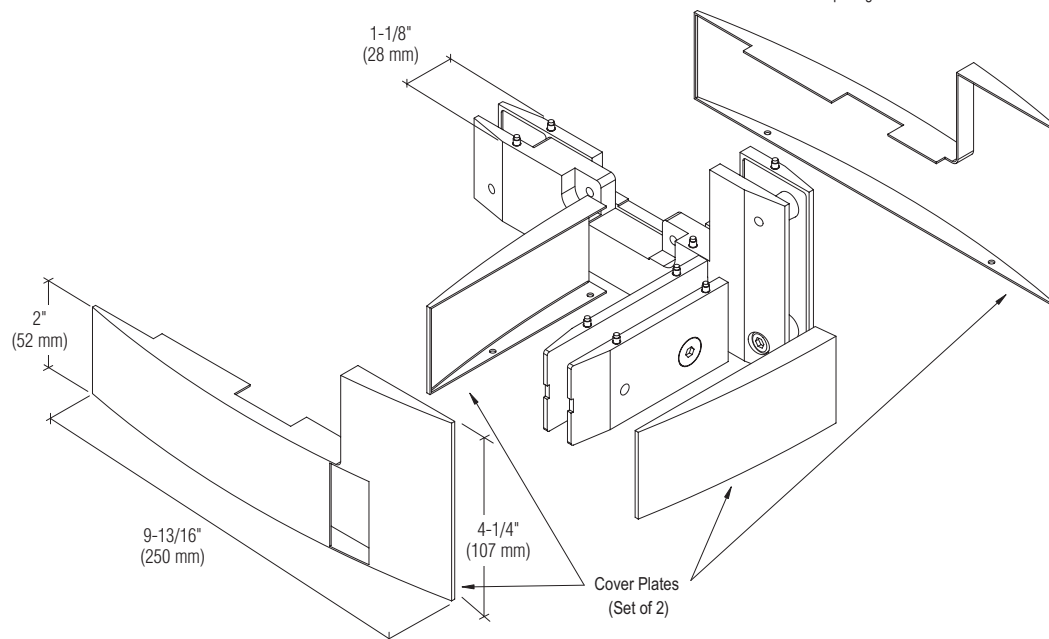

C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

TYPICAL SETBACK

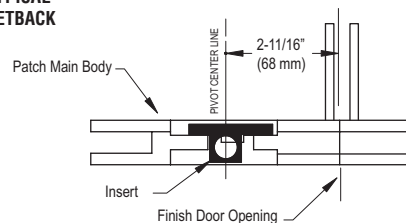

CRL CURVED FACE PLATE SIDELITE MOUNTED TRANSOM PATCH WITH SUPPORT FIN BRACKET

TYPICAL 2-11/16" (68 mm) SET BACK

INCLUDES: INSERT, COVER PLATES

Cat. No. CPF41R

Cat. No. CPF41L

Important Information:

The CPF Right or Left Hand Sidelite Mount Transom Patch is designed for 2-11/16" (68 mm) set back. This dimension is measured from the "finished" door opening to the pivot center line.

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm) thick
tempered safety glass

Construction: High density casting

Glass Fabrication Required: Cut-Out and
Hole Required - See Reverse

Includes: Base Fitting, Insert, Cover Plates, Screws,
and Gaskets for 3/8" (10 mm) and 1/2" (12 mm) Glass

Accessories: (Included) - None

Available Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel

Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side


For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:

For public safety, we recommend the use of tempered safety glass only.


SEE TEMPLATE ON BACK

Refer to Dimensions Shown to Ensure Accuracy

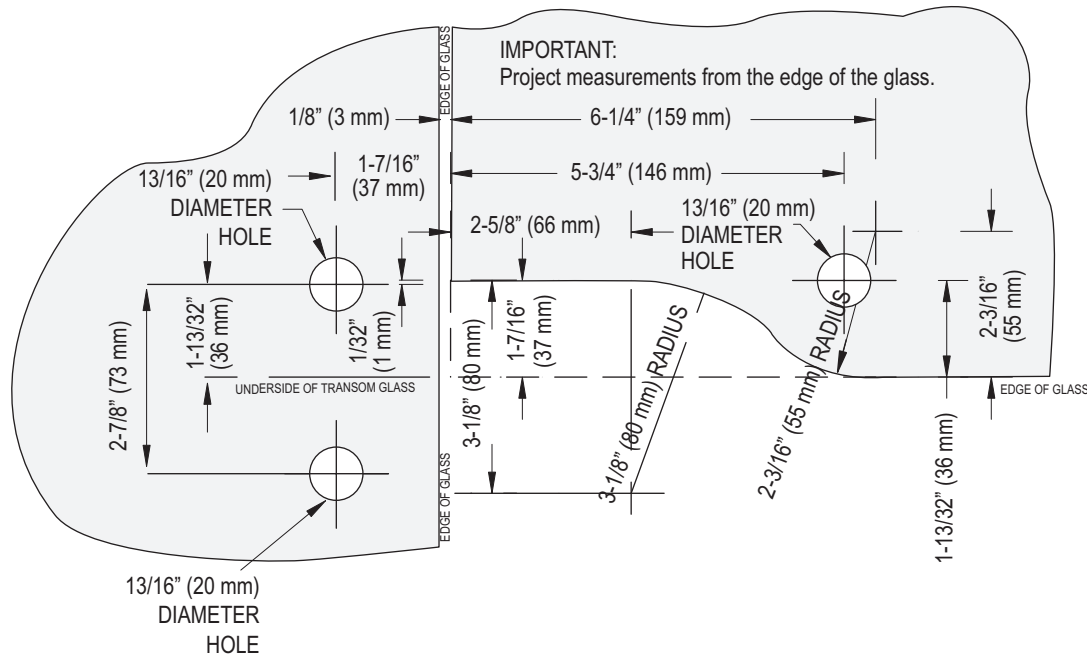

SIDELITE GLASS

TRANSOM GLASS

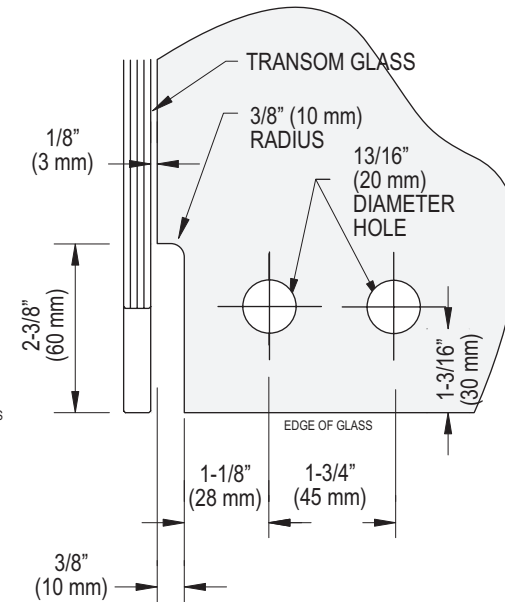

SUPPORT FIN GLASS

CRL CURVED FACE PLATE SIDELITE MOUNTED TRANSOM PATCH WITH SUPPORT FIN BRACKET

TYPICAL 2-1 1/16" (68 mm) SET BACK

INCLUDES: BASE FITTING, INSERT, AND COVER PLATES

Cat. No. CPF41R

Cat. No. CPF41L

TEMPLATE CAN BE REVERSED TO ACCOMMODATE RIGHT OR LEFT HAND INSTALLATION

