


Entice HP+ Glass Entrance System



Entice HP+ Glass Entrance System 3D Preview

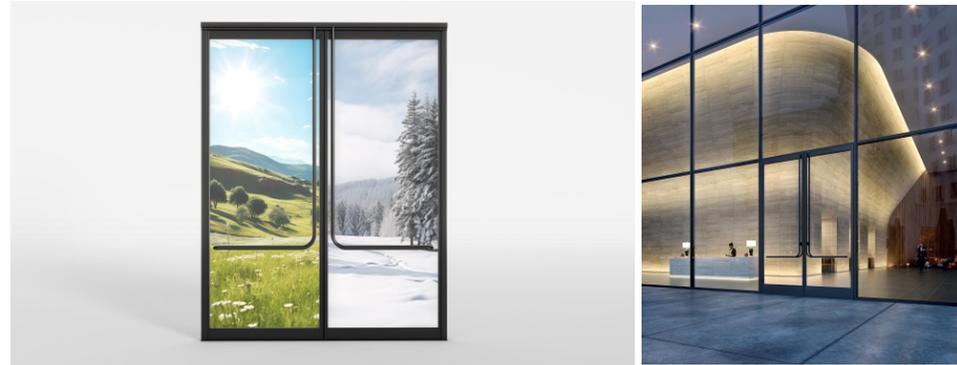

CRL

www.crlaurence.com

The evolution of glass entrances is here. The Entice HP+ Glass Entrance System introduces engineering advancements that surpass industry standards in aesthetics and performance. Monumental glass doors spanning 10 feet tall and 4 feet wide can be specified with ultra-narrow 1-5/8" door stiles to convey a grand entrance and heavy-glass visuals.

As an AAMA CW Performance Class rated system with 1" insulating glass and a distinct full perimeter seal, Entice HP+ offers year-round, all-weather performance that asserts its status as a next-generation glass entrance. Structural enhancements have also given the system greater design pressure capacities.

Aesthetic Features

- Ultra-narrow 1-5/8" door stiles
- Slim 2-7/8" system depth
- No glass stop break lines
- Max door height: 10' recommended
- Max door width: 4' recommended
- Handle hardware mounts onto glass
- Premium cladding in customizable finishes

Performance Features

- AAMA CW Performance Class rating
- Thermally broken stiles, jambs, and threshold
- Full perimeter seal
- 1" dual panel insulating glass
- Tested to 1,000,000 cycles
- Continuous gear hinge (760 lb rated)
- Design Pressure of 30 psf (4' x 10' door)
- Air infiltration: 0.16 cfm/ft 2 @ 1.57 psf

An unmistakable feature of Entice HP+ is its unique ability to support Blumcraft® Panic Devices and other types of handle hardware directly on dual-glazed 1" insulating glass units. This is achieved using precision-engineered, through-glass fittings. Despite the floating-on-air aesthetic, panic devices pass the UL emergency exit load test.


Through-Glass Handle Hardware



AVAILABLE FINISHES



Single Door 4" bottom rail

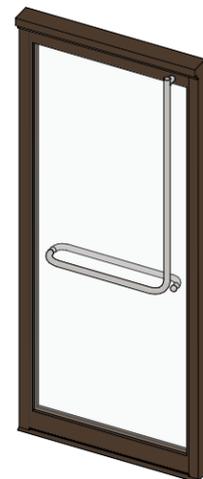


Single Door 10" bottom rail



Double Door 4" bottom rail



Double Door 10" bottom rail

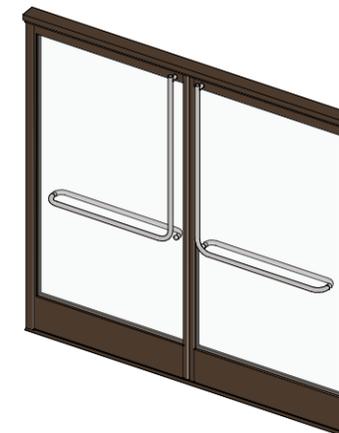

Entice HP+ Series Entrance System