



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

Important Information:

The OPF40 Sidelite Mount Transom Patch is designed for 3/4" offset.
This dimension is measured from the door edge to the pivot center line.

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm) Thick Tempered Safety Glass

Construction: High Density Casting

Glass Fabrication Required: Cut-Out and Hole Required - See Reverse

Includes: Gaskets, Screws and Template

Accessories: (Included)

- NONE

Available Patches:

- OPF40LBS

- OPF40LPS

- OPF40RBS

- OPF40LBS



Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side


For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:

For public safety, we recommend the use of tempered safety glass only

SEE TEMPLATE ON BACK

Refer to Dimensions Shown to Ensure Accuracy

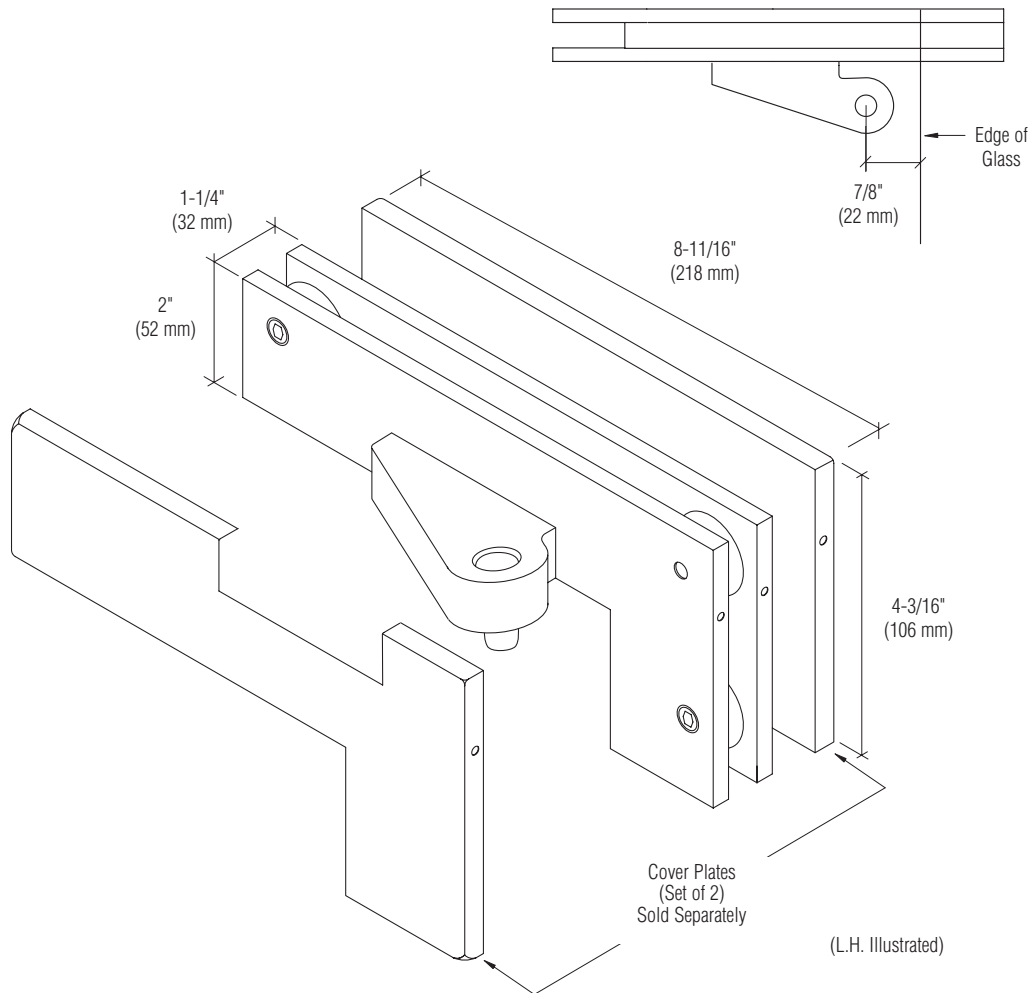

CRL OFFSET SIDELITE MOUNTED TRANSOM PATCH

Offset Pivot



Cat. No. OPF40

C.R. Laurence Co., Inc.
crlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144;
Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7700. Toll free fax (800) 587-7501.



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

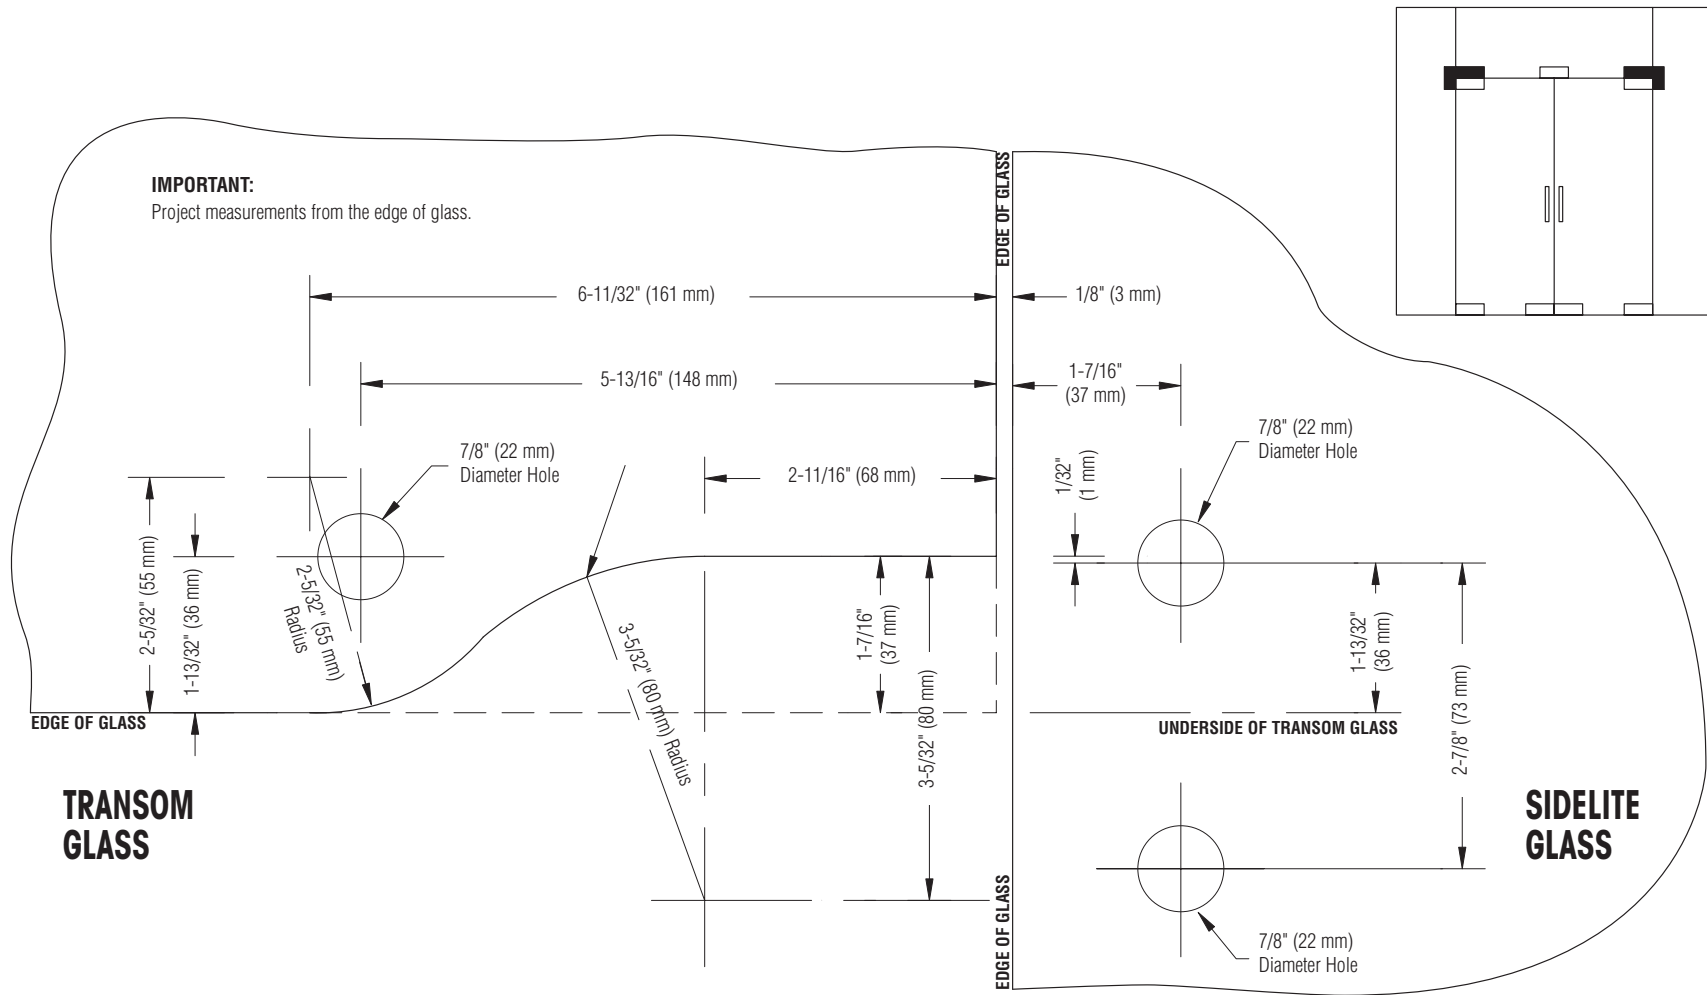

CRL OFFSET SIDELITE MOUNTED TRANSOM PATCH

Cat. No. OPF40



ALWAYS USE DIMENSIONS



TO ENSURE ACCURACY

NOT TO SCALE