


*** SEE TEMPLATE ON BACK ***
Refer to Dimensions Shown
to Ensure Accuracy

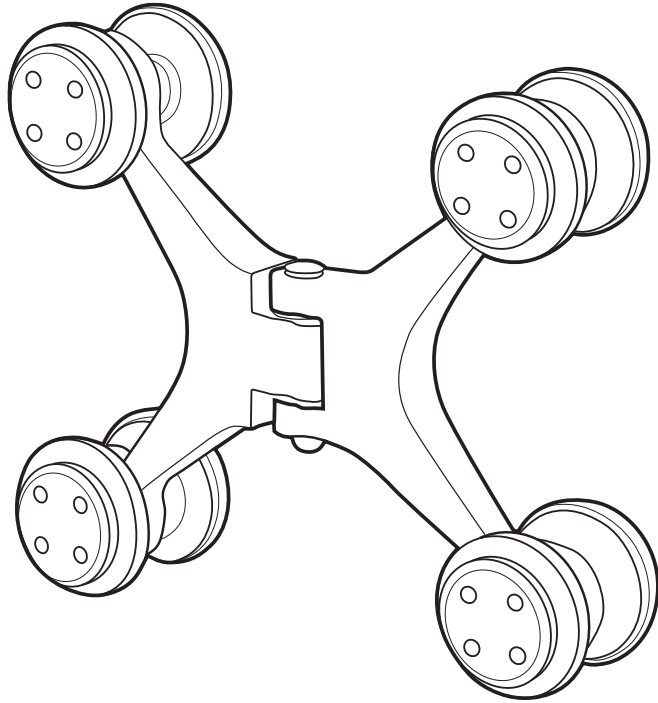

SYDNEY

180° Glass-to-Glass Hinge

CAT. NO. SYD180

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Specifications:

Glass Sizes:	5/16" (8mm) to 3/8" (10mm) thick tempered safety glass
Construction:	316 Stainless Steel
Closing Type:	Precise closing to 0°
Hole Required:	Two 5/8" (16mm) diameter holes required per panel per hinge
Includes:	Gaskets, screws and template

Maximum Door Capacities for Two Hinges or Three Hinges

Maximum Door Weight:	80lbs.(36 kg)	120 lbs.(55 kg)
Maximum Door Width:	28"(711mm)	34"(864mm)

Use of Gaskets:

For 5/16" (8mm) Glass: Use one gasket on each side
For 3/8" (10mm) Glass: Use one gasket on each side

Recommendations:

For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges. A spanner wrench is required to tighten these hinges. We recommend Catalog Number SW19 (not included).

Maintenance Guidelines:


- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

IMPORTANT: Project measurements from the edge of the glass.


IMPORTANT: Changing the angle alters the location of the holes to be drilled in the glass! Before fabricating the glass to any other angle than what's shown, consult with C.R. Laurence's Technical Sales Department.



SYDNEY
180° Glass-to-Glass Hinge
CAT. NO. SYD180

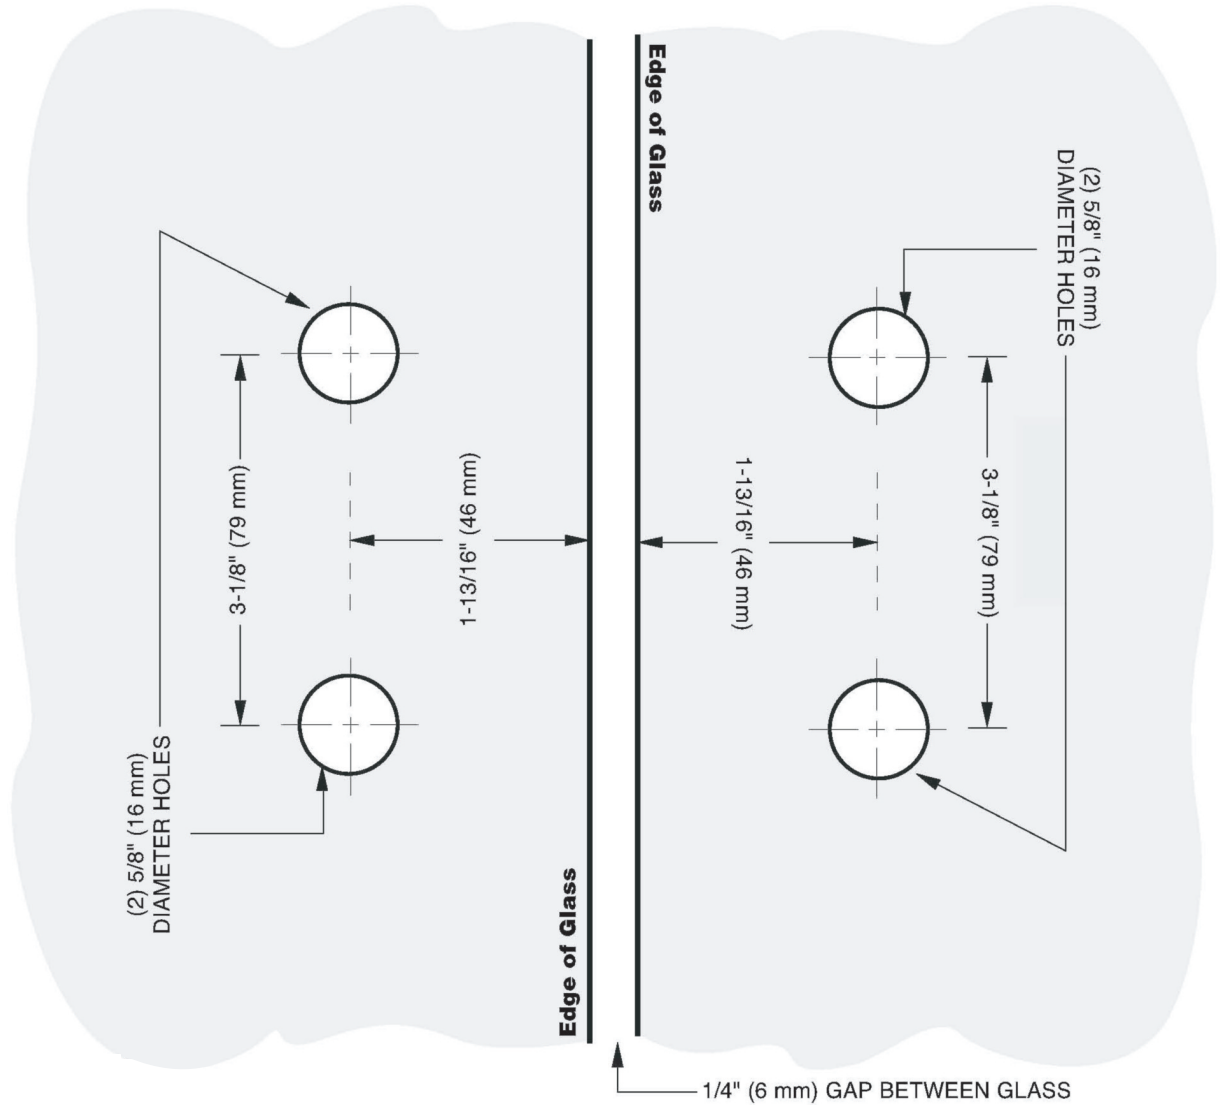

*** SEE TEMPLATE ON BACK ***
Refer to Dimensions Shown
to Ensure Accuracy

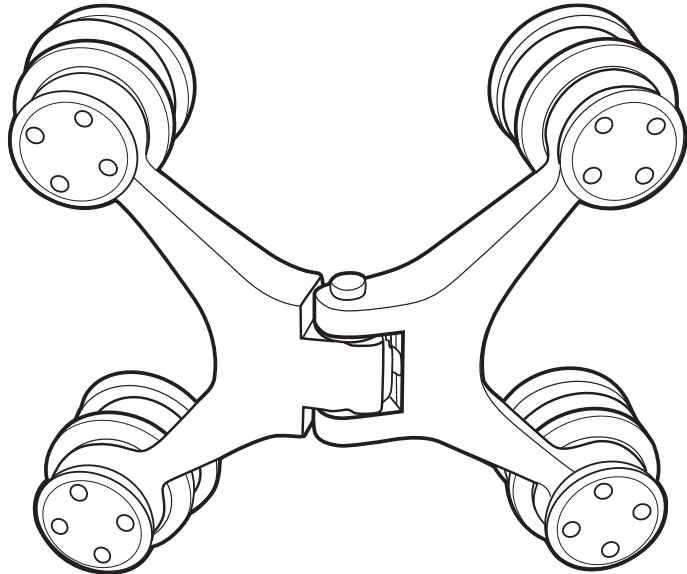

SYDNEY

Glass-to-Glass Hinge (135° Application)

CAT. NO. SYD180

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Specifications:

Glass Sizes:	5/16" (8mm) to 3/8" (10mm) thick tempered safety glass
Construction:	316 Stainless Steel
Closing Type:	Outswing only - non self-centering
Hole Required:	Two 5/8" (16mm) diameter holes required per panel per hinge
Includes:	Gaskets, screws and template

Maximum Door Capacities for Two Hinges or Three Hinges

Maximum Door Weight:	80lbs.(36 kg)	120 lbs.(55 kg)
Maximum Door Width:	28"(711mm)	34"(864mm)

Use of Gaskets:

For 5/16" (8mm) Glass: Use one gasket on each side
For 3/8" (10mm) Glass: Use one gasket on each side

Recommendations:


For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges. A spanner wrench is required to tighten these hinges. We recommend Catalog Number SW19 (not included).

Maintenance Guidelines:

- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

IMPORTANT: Project measurements from the edge of the glass.

IMPORTANT: Changing the angle alters the location of the holes to be drilled in the glass! Before fabricating the glass to any other angle than what's shown, consult with C.R. Laurence's Technical Sales Department.



SYDNEY
Glass-to-Glass Hinge (135° Application)
CAT. NO. SYD180

