


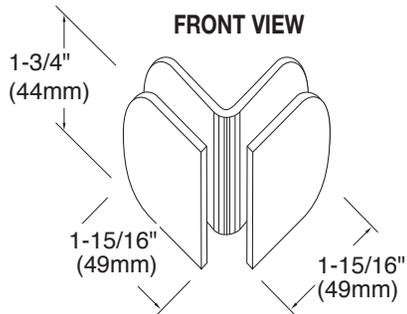


TEMPLATE OPTION FOR SQUARE CUT GLASS

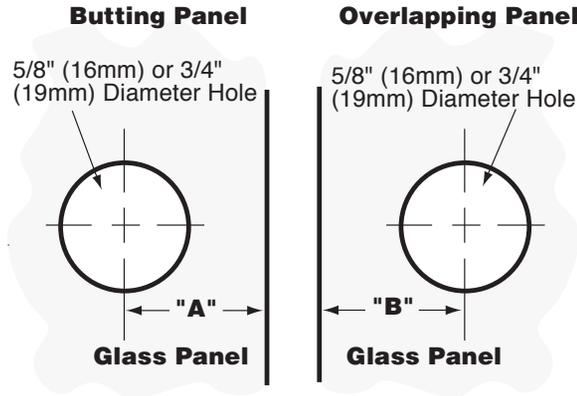


IMPORTANT: Project measurements from the edge of the glass.

Specifications:

Material: Solid brass
 Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm)
 Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
 Includes: Mounting screws and gaskets
 Note: Additional set of gaskets is required for 5/16" (8mm)

Glass Thickness	"A" Measurement	"B" Measurement
1/4" (6mm)	1-3/16" (30mm)	1-1/2" (38mm)
5/16" (8mm)	1-3/16" (30mm)	1-9/16" (40mm)
3/8" (10mm)	1-3/16" (30mm)	1-5/8" (42mm)
1/2" (12mm)	1-3/16" (30mm)	1-3/4" (44mm)

TEMPLATE OPTION FOR 45° MITERED GLASS

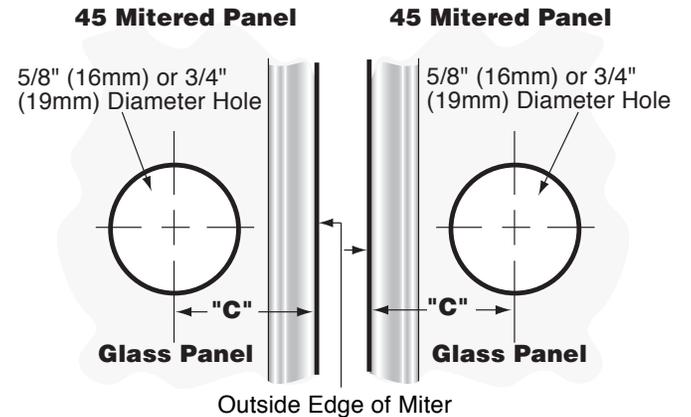

Glass Thickness	"C" Measurement
1/4" (6mm)	1-7/16" (37mm)
5/16" (8mm)	1-1/2" (38mm)
3/8" (10mm)	1-9/16" (40mm)
1/2" (12mm)	1-11/16" (42mm)

*From outside edge of miter

ALWAYS USE DIMENSIONS TO ENSURE ACCURACY

GLASS CLAMPS

Roman 90° Clamp (Glass-to-Glass Application)
 CAT. NO. ROM91

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.