

CAL.
C.R. LAURENCE CO., INC.

Glazing, Industrial, Construction
and Automotive Supplies
Phone Toll Free (800) 421-6144
Fax Toll Free (800) 262-3299

Locations to Serve the Industries
Throughout North America & Europe
Corp. Office: P.O. Box 59823, Los Angeles, CA 90058-0923
Website Address: www.crlaurence.com

PR70 SERIES




Template for PARALLEL ARM INSTALLATION CLOCKWISE OPENING (RIGHT HAND DOOR-PUSH SIDE)

FIXING SEQUENCE

FIX CLOSER BODY TO DOOR. FIT PARALLEL ARM BRACKET TO UNDERSIDE OF HEAD STOP WITH SPIGOT DOWNWARDS. REMOVE ARM SHOE FROM FLAT ARM/ARM SHOE ASSEMBLY. MOUNT FLAT ARM ONTO SPIGOT ON PARALLEL ARM BRACKET AND RETAIN WITH SCREW/WASHER SUPPLIED. SLIDE CHANNEL SECTION OF ADJUSTABLE ARM/MAIN ARM ASSEMBLY ONTO FLAT ARM. WITH SPANNER TURN SQUARE SHAFT AT BOTTOM OF CLOSER APPROXIMATELY 45° TOWARDS HINGE EDGE OF DOOR AND HOLD. ALIGN "R" AND INDEX MARK, PLACE MAIN ARM ONTO PINION SHAFT AND SECURE WITH SCREW/WASHER PROVIDED. POSITION ADJUSTABLE ARM PARALLEL TO DOOR FACE (See illustration), AND SECURE ADJUSTMENT WITH SCREW/WASHER SUPPLIED. AFTER ADJUSTMENT OF THE VALVES, SNAP PINION CAP OVER SHAFT AT BOTTOM OF CLOSER AND FIX RECTANGULAR COVER WITH TWO SCREWS INTO BOTH END SIDE OF CLOSER BODY.

IN CASE OF SOFT LINE FULL COVER, SLIDE COVER-INSERT INTO THE UN-USED CUTOUT IN COVER. FIX WITH PROVIDED SCREW FROM TOP SIDE OF COVER. PINION CAP IS NOT NECESSARY.

CLOSER MOUNTS ON HINGE(PUSH) SIDE OF DOC

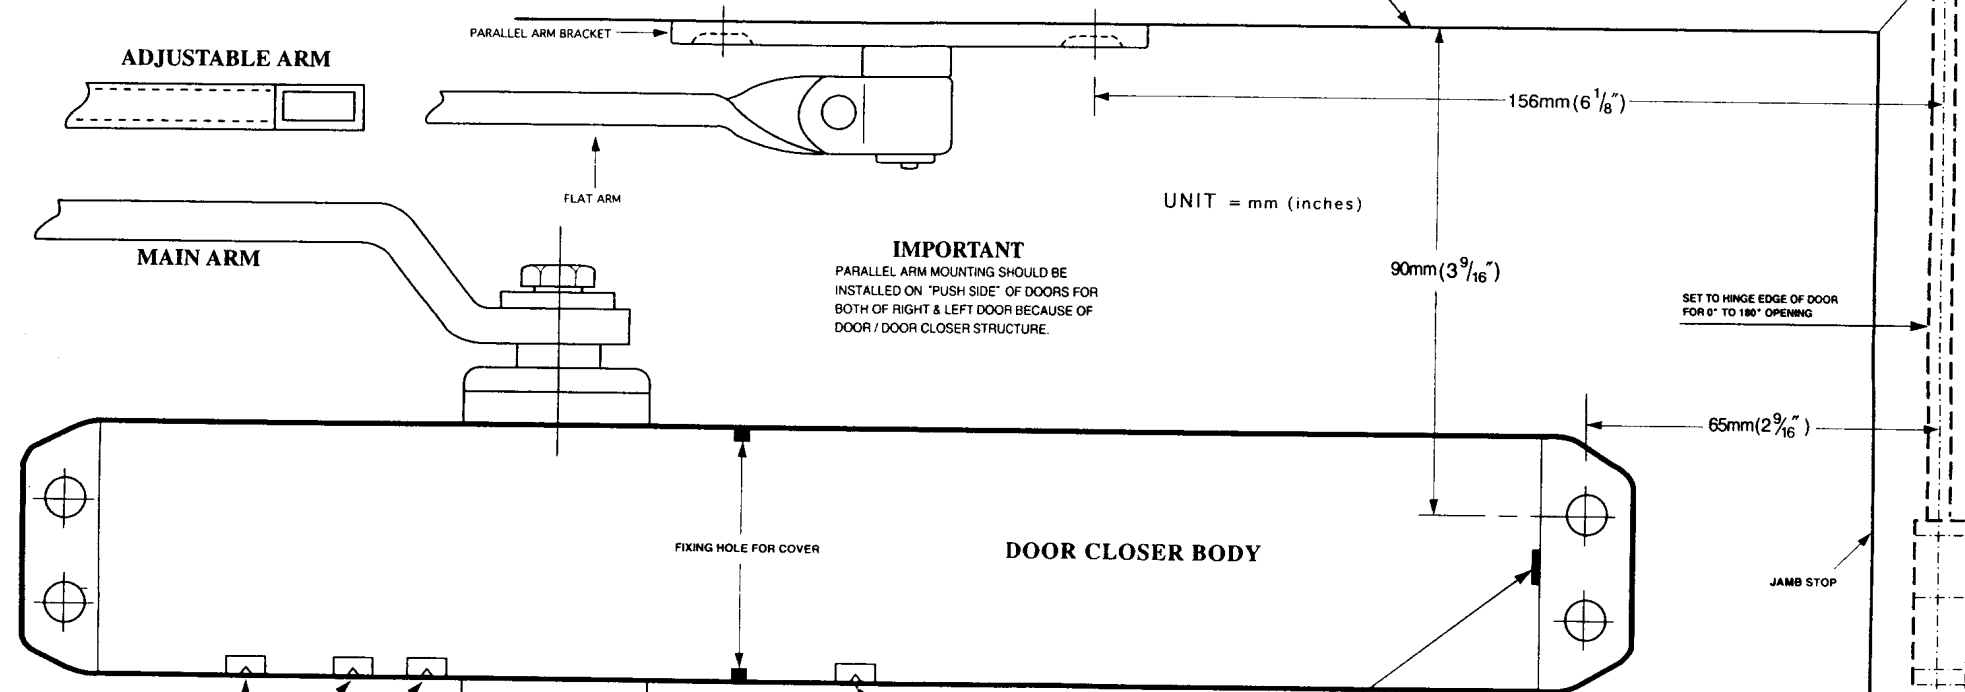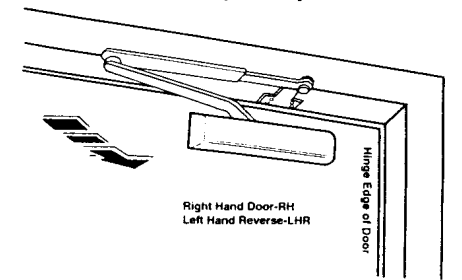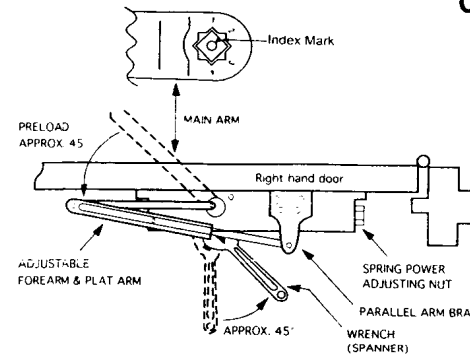

IMPORTANT
PARALLEL ARM MOUNTING SHOULD BE
INSTALLED ON "PUSH SIDE" OF DOORS FOR
BOTH OF RIGHT & LEFT DOOR BECAUSE OF
DOOR / DOOR CLOSER STRUCTURE.

LATCH SPEED VALVE



SWEEP(CLOSING) SPEED VALVE

DELAYED ACTION VALVE

CONTROLS DELAYED CLOSING
NEVER CLOSE THIS VALVE COMPLETELY.
* IF NEEDED THIS D.A. FUNCTION, DO
NOT CLOSE THE BACK CHECK VALVE

CAUTION!

DO NOT TURN ADJUSTING VALVES MORE THAN TWO FULL
TURNS ANTI-CLOCKWISE FROM THE FACTORY SET POSITION.
CLOSING ARCS "SWEEP" AND "LATCH" ARE CONTROLLED BY
TWO SEPARATE VALVES. FIRST "SWEEP", THEN "LATCH" FOLLOWED
BY "DELAY" AND LAST "BACK-CHECK". TO INCREASE SPEED TURN
VALVE ANTI-CLOCKWISE. TO DECREASE SPEED TURN VALVE
CLOCKWISE. ADJUST VALVES WITH HEX KEY SUPPLIED



SPRING POWER ADJUSTING NUT
POSITIONED TOWARD HINGE EDGE

CONTROLS OPENING AND CLOSING FORCE
TO INCREASE TURN NUT CLOCKWISE
TO DECREASE TURN NUT ANTI-CLOCKWISE
CLOSERS ARE FACTORY ASSEMBLED
TO SIZE 3. TURN ADJUSTMENT NUT
AS SHOWN TO CHANGE CLOSER SIZE.

BACK CHECK CONTROL VALVE

CONTROLS BACK CHECK INTENSITY
TO INCREASE TURN VALVE CLOCKWISE
TO DECREASE TURN VALVE ANTI-CLOCKWISE
NEVER CLOSE THIS VALVE COMPLETELY
* IF NEEDED THIS B.C. FUNCTION, DO NOT
CLOSE THE DELAYED ACTION VALVE

POWER ADJUSTMENT CHART FOR DOOR SELECTIONS					
DOOR CLOSER SIZE	CLOCKWISE TURNS OF ADJUSTING NUT	PR70 SERIES (SIZE 1/2 - 4)	PR70 SERIES (SIZE 2 - 6)	APPLICABLE DOOR SIZE	
				INTERIOR	EXTERIOR (SWING OUT)
1/2	Not Recommended Use	-9	N/A	28" (0.71m)	24" (0.61m)
1	Not Recommended Use	-6	N/A	32" (0.81m)	28" (0.71m)
2	2	+ -3	+ -3	36" (0.91m)	32" (0.81m)
3	3	0 (FACTORY SET)	0 (FACTORY SET)	42" (1.07m)	36" (0.91m)
4	4	3	3	48" (1.22m)	42" (1.07m)
Not Recommended Use	5	N/A	6	54" (1.37m)	48" (1.22m)
Not Recommended Use	6	N/A	9	58" (1.47m)	52" (1.32m)

* -3 MEANS 3 TURNS TO ANTI-CLOCKWISE