



1. MOUNT MULLION STABILIZERS IN HOLES PROVIDED WITH 2 EA. 10-24x7/8(22.22) OVAL HDMS.
2. CLOSE DOOR AND ALIGN DOOR STABILIZER ON THE DOOR, ALLOWING 1/16"(1.58)FOR CLEARANCE,AS SHOWN.
3. MARK HOLE CENTERS,DRILL AND TAP FOR 10-24 IN DOOR.
4. MOUNT DOOR STABILIZER TO DOOR WITH (2) 10-24x7/8(22.22) O.H.M.S.
5. REPEAT PREP ON OTHER DOOR.

10-24x7/8(22.22) OVAL HDMS ➔

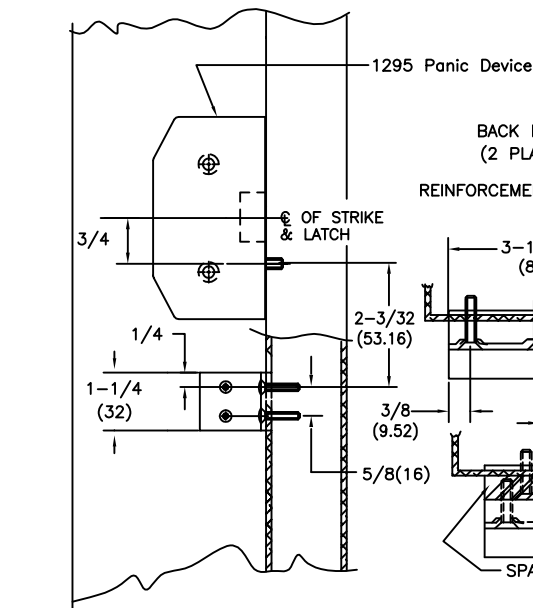


SLIP MULLION INTO TOP AND BOTTOM MULLION HOLDERS
AS SHOWN, SECURE IN POSITION WITH (2) BACK PLATES
& (2) 1/4-20x7/8(22.22) OVAL H.M.S.

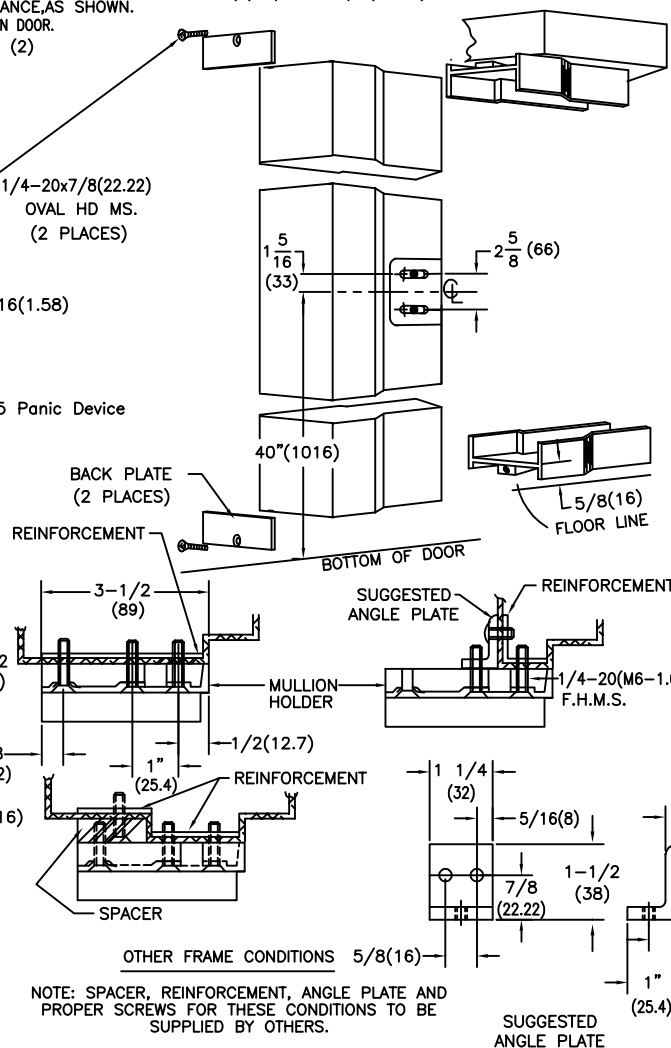


NOTE: SPACER, REINFORCEMENT, ANGLE PLATE AND PROPER SCREWS FOR THESE CONDITIONS TO BE SUPPLIED BY OTHERS.

LINE UP AND INSTALL BOTTOM MULLION
HOLDER WITH CENTER OF DOOR
OPENING AND FLUSH WITH CLOSED
DOORS.

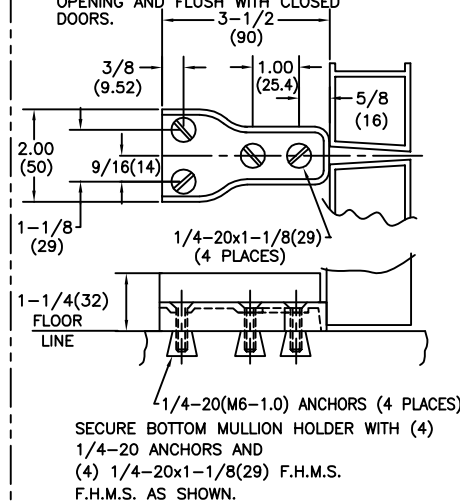


IF THRESHOLD IS USED, IT MUST BE CUT TO
FIT BOTTOM MULLION HOLDER AS SHOWN.

LINE UP AND INSTALL TOP MULLION
HOLDER WITH CENTER OF DOOR
OPENING AND FLUSH WITH CLOSED
DOORS. SECURE WITH (2) #14x1-1/2(38)
FL. HD SELF TAPPING SCREWS.



TRIM TOP END OF MULLION ALLOWING FOR A OVERALL LENGTH $1/16"$ (1.58) LESS THAN THIS DIMENSION.



C 08312302		REF. SHEET 1 OF 2 ECN1606		RM
B 06/06/00		REF. SHEET 2 OF 2		ECN1377 RM
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		APPROVALS	DATE	 Jackson CORPORATION 3447 UNION PACIFIC AVE. LOS ANGELES, CALIF. 90032
DECIMAL DIMENSIONS .XX ± .010		APPROVED		
DECIMAL DIMENSIONS .XXX ± .005		CHECKED		
ANGULAR ± ° FRACTIONAL ± 1/64		DRAWN	R.M. 8/21/99	
MATERIAL		SCALE	NONE	
FILE NO. 10-960		INST. INSTR. 1295x896		SHEET 2 OF 2 SHEETS
NEXT ASSY. 1295 KITS	FINISH	MULLION		DWG. NO. 10-960 (REV.)
QTY. USED 1	HEAT TREAT			