



CRL 1/2" (12.7 mm) Diameter Standoff Mounting Options

Option 1. Hanger Bolt Installation

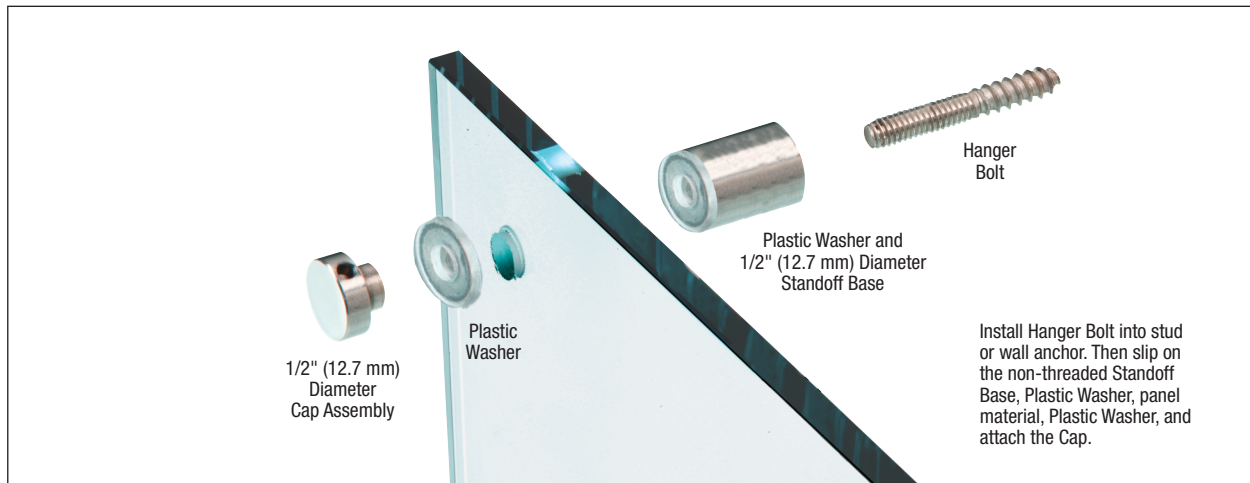

Option 2. Threaded Rod Installation

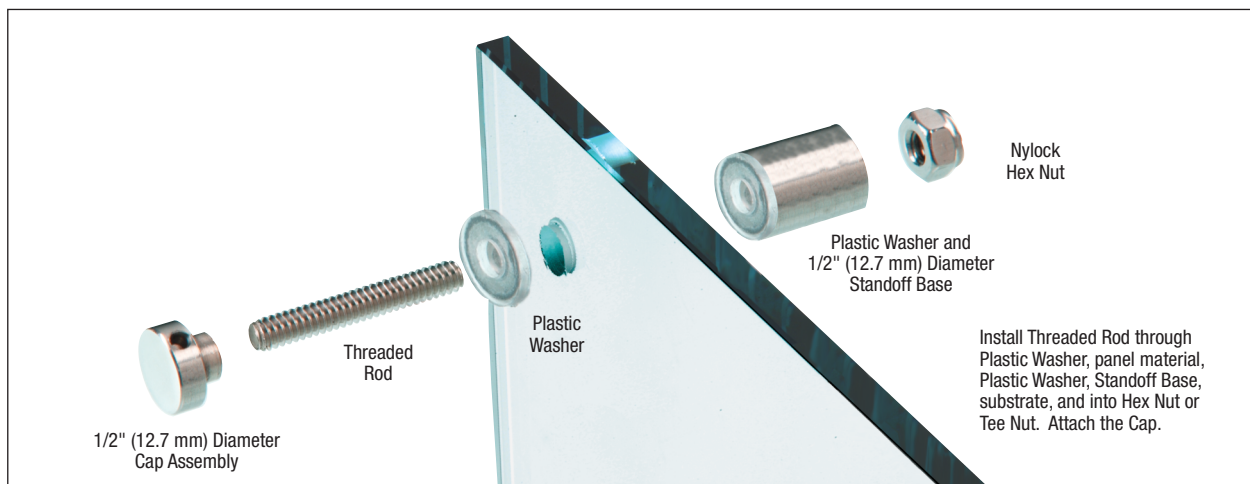

Cap Securing Instructions



Tighten Cap down by using CRL Cat. No. 666564 Drill Bit. Insert into the side hole and tighten until snug.
NOTE: Do not over tighten.

Due to the diversity of applications, weight limitations for Standoff Systems are dependent upon wall or substrate anchoring and material strengths.