

# **PETITE**

180° Glass-to-Glass Hinge (Door Swings 180° In Only) CAT. NO. PET182

\*NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges.

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

## Important Information:

Door and fixed panel use the same hole pattern.

## Specifications:

Glass Sizes: 1/4" (6mm) to 5/16" (8mm) thick tempered safety glass

Construction: Solid brass

Closing Type: Self-centering when within 15° of closed position

Cutout Required

Includes: Gaskets, screws and template

# Maximum Door Capacities for Two Hinges or Three Hinges

 Maximum Door Weight:
 55 lbs. (25 kg)
 82 lbs. (37 kg)

 Maximum Door Width:
 31" (787mm)
 34" (864mm)

#### Use of Gaskets:

For 1/4"(6mm) Glass: Use one thick gasket on each side For 5/16"(8mm) Glass: Use one thin gasket on each side

### **Recommendations:**

For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges.


#### **Maintenance Guidelines:**

Never use an abrasive cleaner on the hardware. Many of the components are
coated with a clear lacquer that will be irreparably damaged if subjected to
harsh, abrasive chemicals. Advise your customer that drying the hardware with
a clean, soft towel on a daily basis is the best way to maintain the hardware. If
mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as
lvory or a similar product) into a cup of warm water. Using a soft, non-abrasive
cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

4N-11



**IMPORTANT:** Project measurements from the edge of the glass.

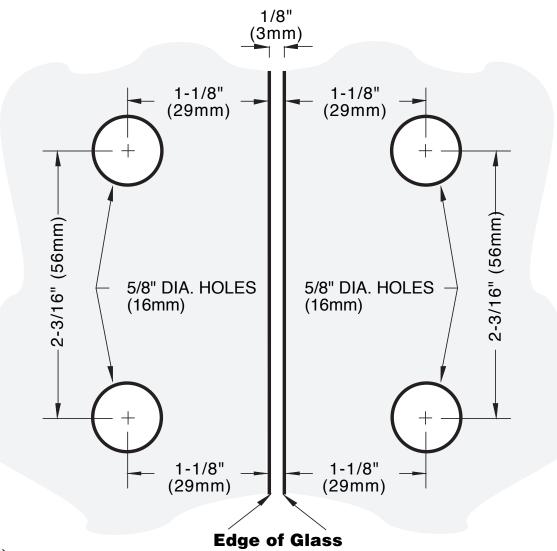

ALWAYS USE DIMENSIONS
TO ENSURE ACCURACY

# **PETITE**

180° Glass-to-Glass Hinge (Door Swings 180° In Only) CAT. NO. PET182