


USE OF GASKETS

FOR 5/16" (8mm) GLASS: USE ONE THICK GASKET AND ONE THIN GASKET ON EACH SIDE

FOR 3/8" (10mm) GLASS: USE ONE THICK GASKET ON EACH SIDE

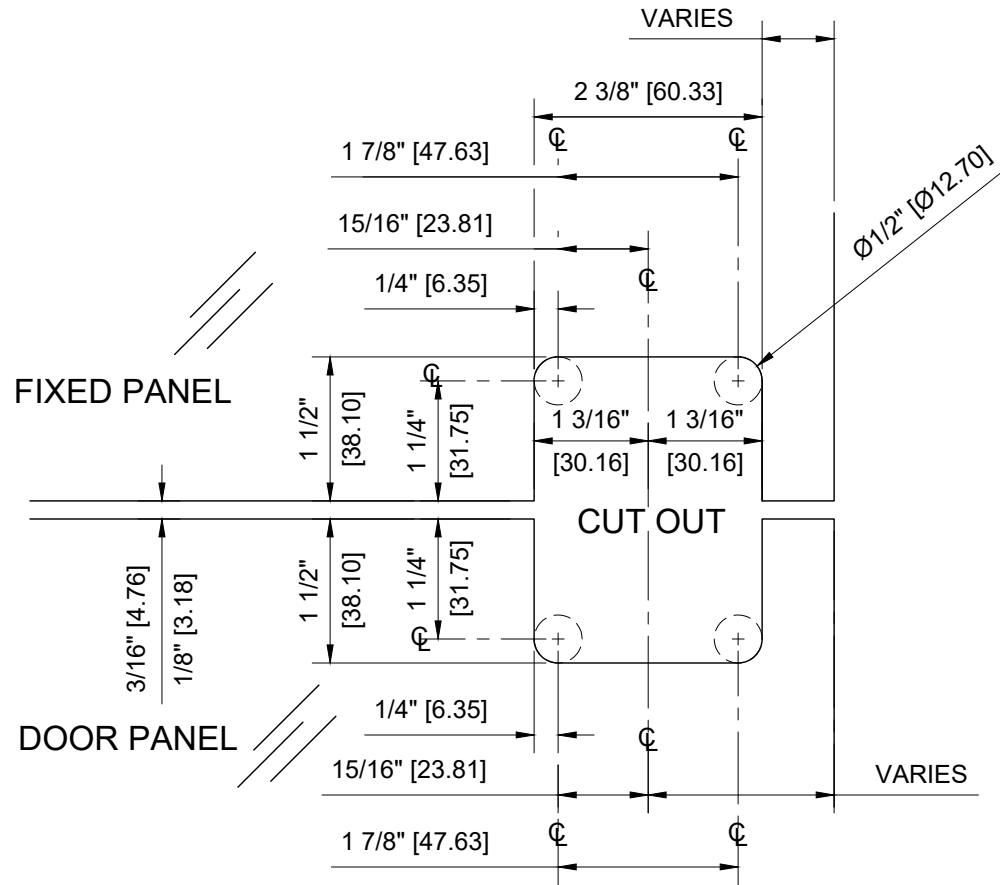

INSET MOUNT METHOD
 1/8" (3mm) TO 3/16" (5mm) CLEARANCE
 GLASS FABRICATION TEMPLATE

PPH02XX - CRL PRIMA SERIES GLASS TO GLASS MOUNT HINGE

CATALOG NUMBER	FINISH
PPH02CH	POLISHED CHROME
PPH02BR	POLISHED BRASS
PPH02ORB	OIL RUBBED BRONZE
PPH02ABC0	ANTIQUe BRUSHED COPPER
PPH02ABN	ANTIQUe BRUSHED NICKEL
PPH02ABR	ANTIQUe BRASS
PPH02BBRZ	BRUSHED BRONZE
PPH02BC0	BRUSHED COPPER
PPH02BL	BLACK
PPH02BN	BRUSHED NICKEL
PPH02BSC	BRUSHED SATIN CHROME
PPH02GP	GOLD PLATED
PPH02PN	POLISHED NICKEL
PPH02SB	SATIN BRASS
PPH02SC	SATIN CHROME

DATE: 10-28-2019
 SCALE: 6"=1'-0"
 DRAWN BY: VM

DESCRIPTION: CRL PRIMA SERIES HINGE
 PPH02 - GLASS TO GLASS MOUNT HINGES

C.R. LAURENCE CO. ARCHITECTURAL PRODUCTS
 2503 E. Vernon Avenue, Los Angeles, CA 90058-1897
 PH (800)-421-6144 FX: 800-587-7501 www.crlaurence.com

