
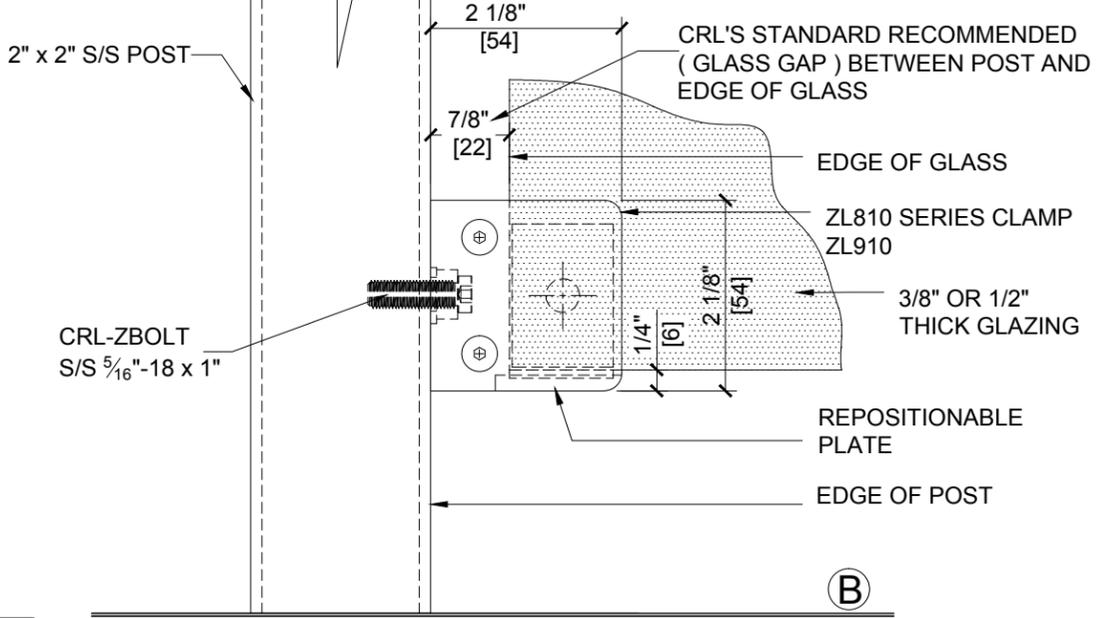


## GLASS FABRICATION TEMPLATE FOR THE Z-SERIES SQUARE TYPE FLAT BASE CLAMPS @ CORNER CONDITION FOR 3/8" (10mm) AND 1/2" (12mm) GLASS

NO GLASS FABRICATION IS REQUIRED WHEN REPOSITIONABLE PLATE IS USED AT BOTTOM CORNER POINTS OF GLASS

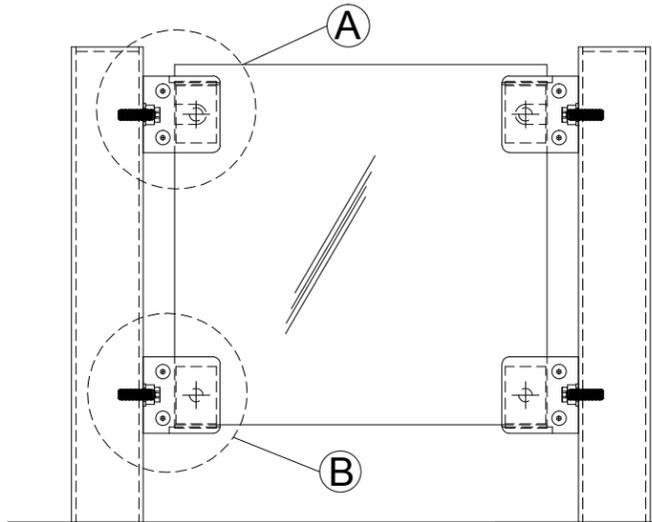

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.  
DO NOT SCALE OR DIMENSION ACTUAL DRAWING  
TO ENSURE ACCURACY

**SPECIFICATIONS:**

GLASS THICKNESS: SUPPORTS 3/8" (10MM) AND 1/2" (12MM) GLASS  
INCLUDES GASKETS FOR BOTH GLASS THICKNESSES


BASE DESIGN: FLAT BACK

FOR USE WITH: FLAT SURFACES

MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.

GLASS FABRICATION: NO GLASS FABRICATION IS REQUIRED WHEN REPOSITIONABLE PLATE IS USED AT BOTTOM CORNER POINTS.

INCLUDES: RUBBER GASKETS AND REMOIBLE STEEL PIN WITH GROMMET.

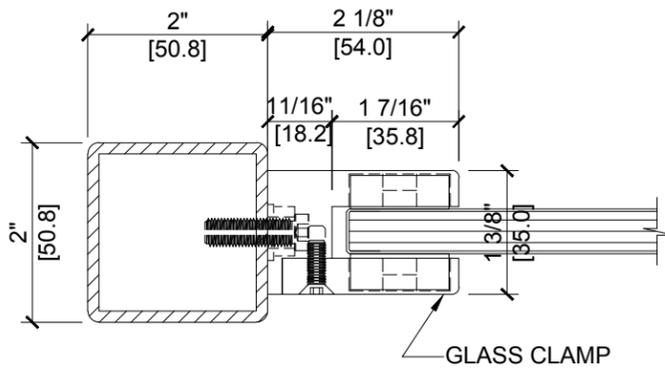

**GLASS FABRICATION  
TEMPLATE USED FOR:**

CATALOG NUMBER
ZL810BN
ZL810CH
ZL810SC
ZL810W
ZL910BS
ZL910PS


**CRL** ARCHITECTURAL PRODUCTS  
PH: 800-421-6144 FX: 800-262-3299  
WWW.CRLAURENCE.COM

DESCRIPTION: Z-SERIES SQUARE TYPE RADIUS BASE GLASS CLAMP

FOR 3/8" (10 mm) & 1/2" (12mm) THICK GLASS


CAT. NO: (SEE CHART) DATE: 01/06/14  
FILE NAME: ZL810-Gls Fab SCALE: 6"=1'-0"  
DRAWN BY: J.V. CHECKED BY: R.D. SHT 1 OF 2

## GLASS FABRICATION TEMPLATE FOR THE Z-SERIES SQUARE TYPE FLAT BASE CLAMPS @ CORNER CONDITION FOR 3/8" (10mm) AND 1/2" (12mm) GLASS

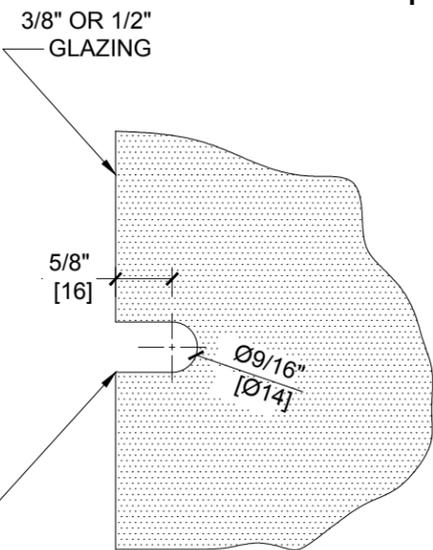

(1) FABRICATION SLOT CUTOUT IS REQUIRED WHEN USING THE PROVIDED STEEL PIN

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.  
DO NOT SCALE OR DIMENSION ACTUAL DRAWING  
TO ENSURE ACCURACY

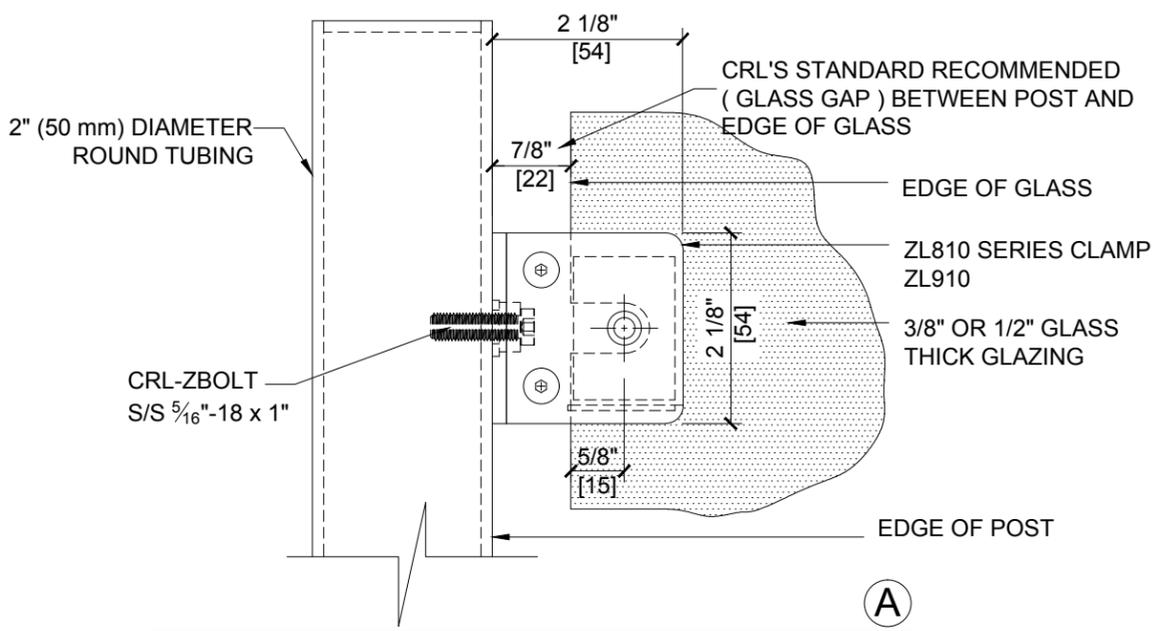

**SPECIFICATIONS:**

GLASS THICKNESS: SUPPORTS 3/8" (10MM) AND 1/2" (12MM) GLASS

INCLUDES GASKETS FOR BOTH GLASS THICKNESSES


BASE DESIGN: FLAT BACK

FOR USE WITH: FLAT SURFACES

MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.

GLASS FABRICATION: FOR 3/8" (10MM) AND 1/2" (12MM) THICK GLASS A 9/16" (14MM) DIAMETER FINGER SLOT IS REQUIRED WHEN USING THE REQUIRED STEEL PIN FOR GLASS SUPPORT

INCLUDES: RUBBER GASKETS AND REMOIBLE STEEL PIN WITH GROMMET.

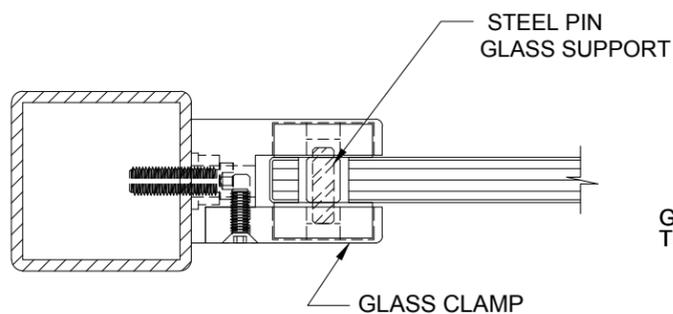

**GLASS FABRICATION  
TEMPLATE USED FOR:**

CATALOG NUMBER
ZL810BN
ZL810CH
ZL810SC
ZL810W
ZL910BS
ZL910PS

**CRL** ARCHITECTURAL PRODUCTS  
PH: 800-421-6144 FX: 800-262-3299  
WWW.CRLAURENCE.COM

DESCRIPTION: Z-SERIES SQUARE TYPE RADIUS BASE GLASS CLAMP

FOR 3/8" (10 mm) & 1/2" (12mm) THICK GLASS

CAT. NO: (SEE CHART) DATE: 01/06/14  
FILE NAME: ZL810-Gls Fab SCALE: 6"=1'-0"  
DRAWN BY: J.V. CHECKED BY: R.D. SHT 2 OF 2