
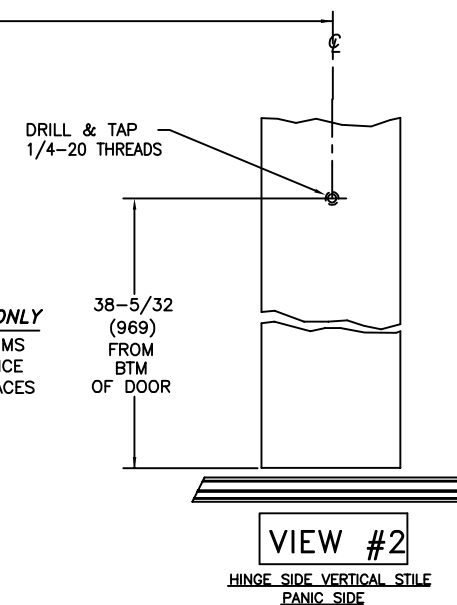


ROUTING INSTRUCTIONS:

1. PREPARE INSIDE FACE (PANIC SIDE) OF ACTIVE STILE PER VIEW #1 & TEMPLATE 10-992.
 2. PREPARE INSIDE FACE (PANIC SIDE) OF HINGE STILE PER VIEW #2 & TABLE "A".
 3. PREPARE THRESHOLD PER VIEW #3.
 4. PREPARE HEADER PER VIEW #4.
 5. IF LOCK CYLINDER IS BEING USED SEE DWG. 10-476 TEMPLATE (WITH MTG PAD)
 6. IF OUTSIDE TRIM IS BEING USED, SEE DWG. 10-987 TEMPLATE (WITH TRIM.)
 7. FOR MOUNTING AND ADJUSTMENTS OF THE 2085 SEE OPPOSITE SIDE THIS PAGE.
- (DWG. 10-950 SHEET 1 OF 2)

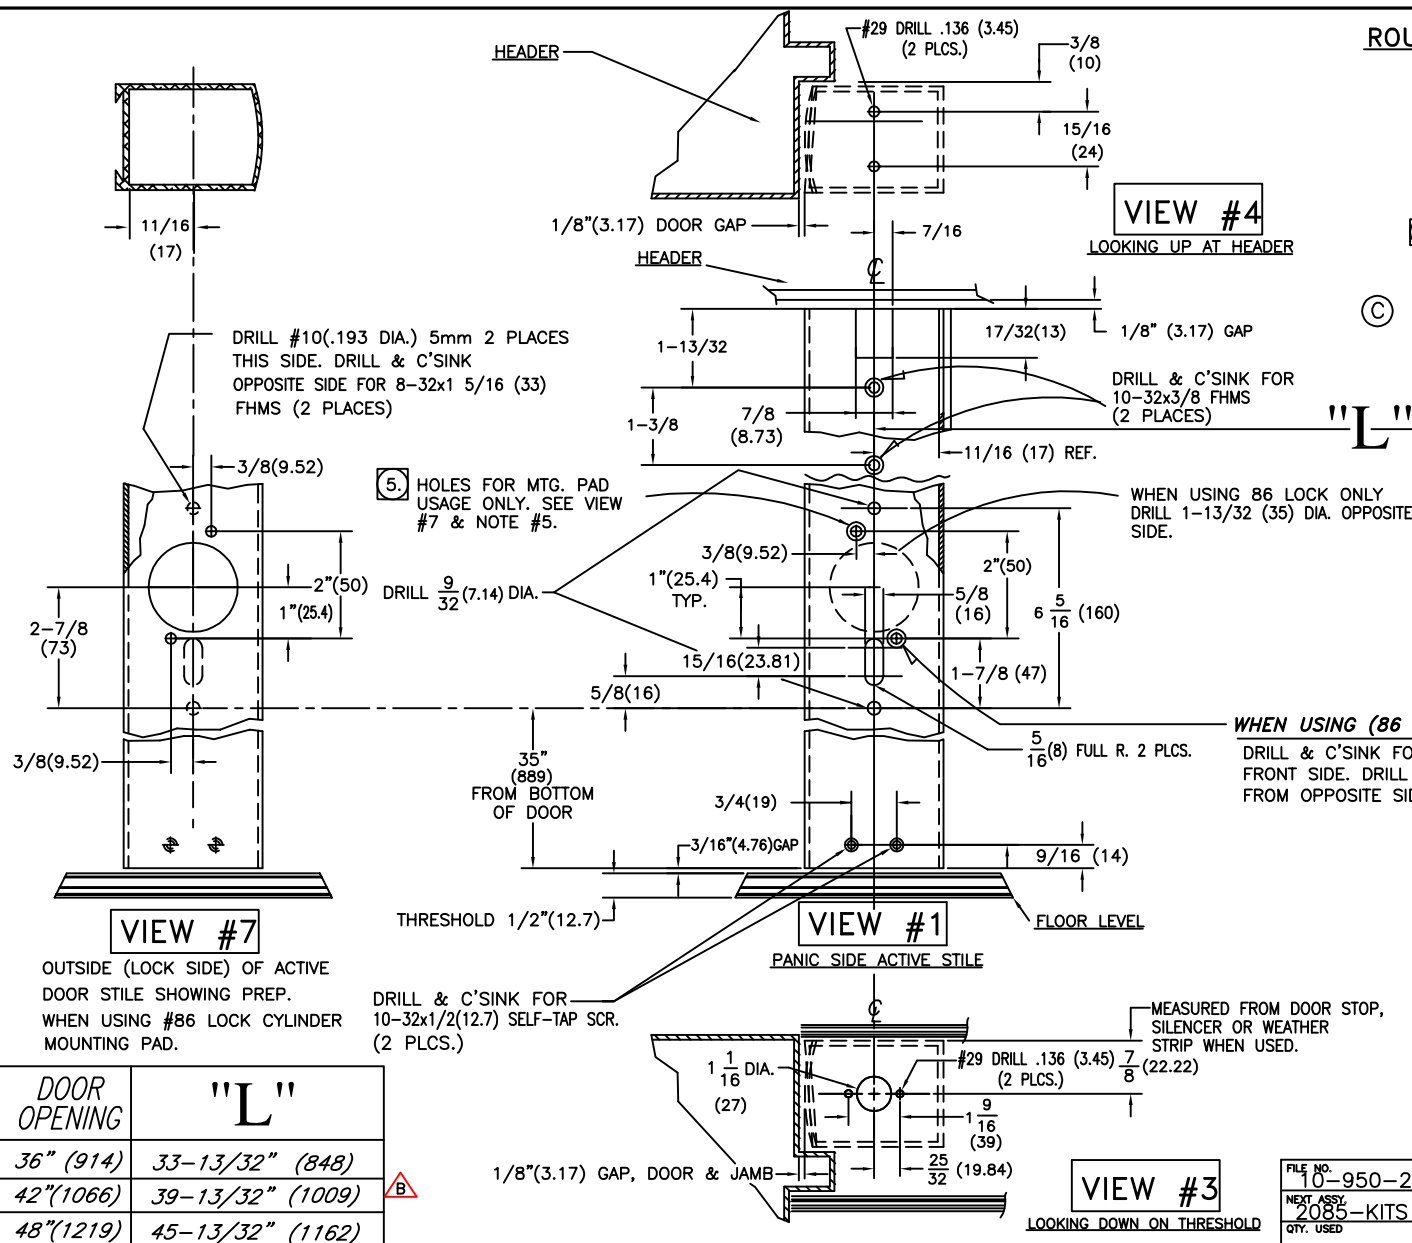

DOOR OPENING	"L"
36" (914)	33-13/32" (848)
42"(1066)	39-13/32" (1009)
48"(1219)	45-13/32" (1162)

C 06/07/00 ADD NOTES FOR OUTSIDE TRIM		ECN1384		RM
B 12/14/99 ADD TABLE		ECN1326		RM
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMAL DIMENSIONS .XX $\pm$.010 DECIMAL DIMENSIONS .XXX $\pm$.005 ANGULAR $\pm$ ° FRACTIONAL $\pm$ 1/64		APPROVALS APPROVED CHECKED DRAWN	DATE 7/17/99	 3447 UNION PACIFIC AVE. LOS ANGELES, CALIF. 90008
MATERIAL		SCALE		
FINISH		NONE		
HEAT TREAT		ROUTING INSTRUCTIONS 2085 CVR PANIC DEVICE		SHEET 2 OF 2 SHEETS DWG. NO. 10-950-2 REV