




C.R. LAURENCE CO., INC.
PROFESSIONAL

GLASS CLAMPS

Oversized 90° Glass Clamp
(Wall-to-Glass Application)

CAT. No. GCB91

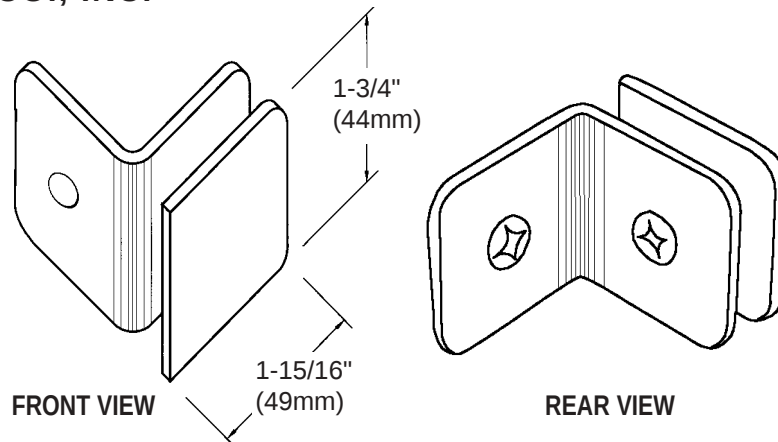

Note: The Clamps shown on this page can also be used in a glass-to-glass application. For information on this see pages 4X-9 and 4X-10.

Specifications:

Material: Solid brass

Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)

Includes: Mounting screws and gaskets


Note: An additional set of gaskets is required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

Cathedral Style 90° Glass Clamp
(Wall-to-Glass Application)

CAT. No. GCB290

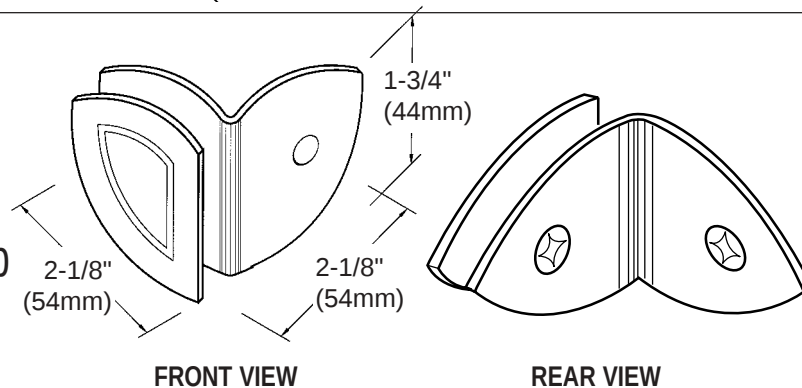

Specifications:

Material: Solid brass

Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)

Includes: Mounting screws and gaskets


Note: An additional set of gaskets is required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

Junior Cathedral 90° Glass Clamp
(Wall-to-Glass Application)

CAT. No. GCB6290

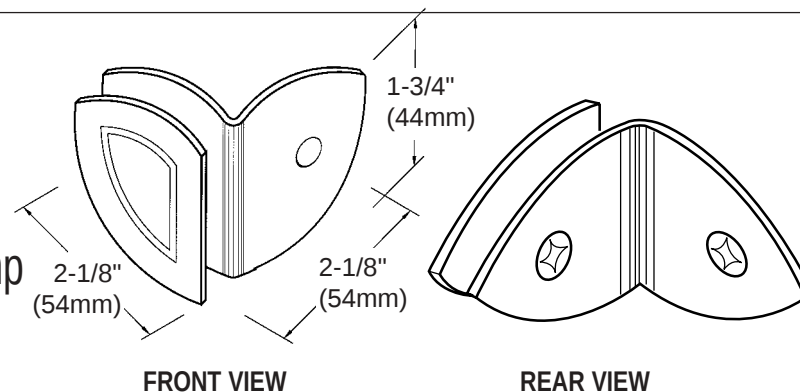

Specifications:

Material: Solid brass

Glass Thickness: 1/4" (6mm)

Hole Size Required: 5/8" (16mm) or 3/4" (19mm)

Includes: Mounting screws and gaskets

Template Shown on Next Page

4X-11