


**\* SEE TEMPLATE ON BACK \***  
Refer to Dimensions Shown  
to Ensure Accuracy

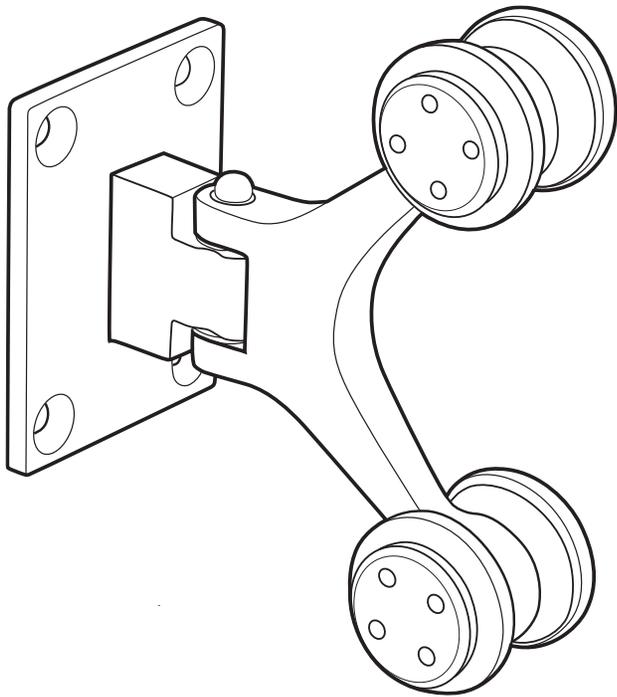

## SYDNEY

Wall Mount Hinge

CAT. NO. SYD044

**\*NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

### Specifications:

Glass Sizes:	5/16" (8mm) to 3/8" (10mm) thick tempered safety glass
Construction:	316 Stainless Steel
Closing Type:	Precise closing to 0°
Hole Required:	Two 5/8" (16mm) diameter holes required per panel per hinge
Includes:	Gaskets, screws and template

### Maximum Door Capacities for Two Hinges or Three Hinges

Maximum Door Weight:	80lbs.(36 kg)	120 lbs.(55 kg)
Maximum Door Width:	28"(711mm)	34"(864mm)

### Use of Gaskets:

For 5/16" (8mm) Glass: Use one gasket on each side  
For 3/8" (10mm) Glass: Use one gasket on each side



### Recommendations:

For public safety, we recommend the use of only tempered safety glass. Do not use power tools when installing these hinges. A spanner wrench is required to tighten these hinges. We recommend Catalog Number SW19 (not included).

### Maintenance Guidelines:

- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

**IMPORTANT:** Project measurements from the edge of the glass.

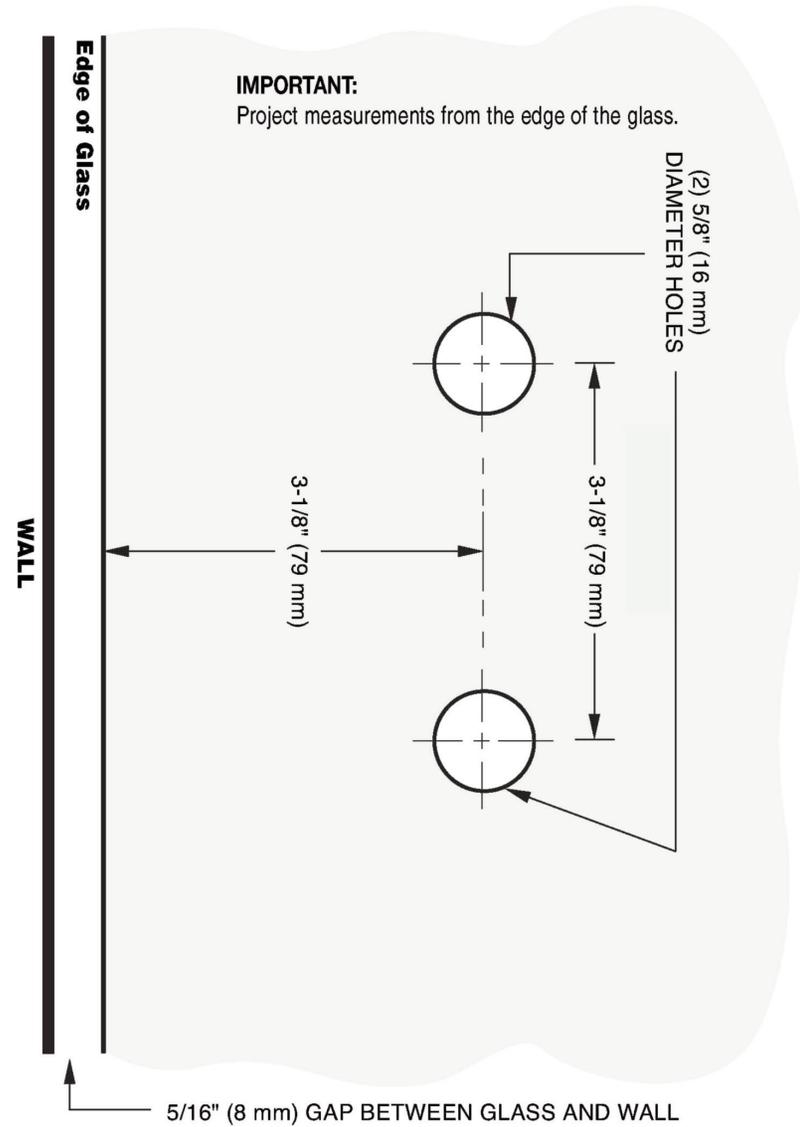

## SYDNEY

Wall Mount Hinge  
CAT. NO. SYD044