

COMPANY NAME _____	PHONE _____
CONTACT _____ ACCOUNT NO. _____	FAX _____
JOB NAME _____	EMAIL _____

☐ QUOTE ☐ ORDER P.O. # _____ DATE _____

SERIES	THICKNESS	STANDARD PROFILE DIMENSIONS		
		STILE	TOP RAIL	BOTTOM RAIL
250 NARROW STILE	1-3/4"	2"	2-1/8"	3-3/16"
400 MEDIUM STILE	1-3/4"	3-1/2"	3-3/16"	6-1/2"
550 WIDE STILE	1-3/4"	5"	5-1/2"	6-1/2"

DOOR STILE	TOP RAIL	BOTTOM RAIL	GLASS STOP
<input type="checkbox"/> 250 Narrow	<input type="checkbox"/> Standard <input type="checkbox"/> 6-1/2"	<input type="checkbox"/> Standard <input type="checkbox"/> 7-1/2"	<input type="checkbox"/> With 1/4" Square Glass Stops
<input type="checkbox"/> 400 Medium	<input type="checkbox"/> 3-3/16" - Min for OHCC <input type="checkbox"/> 9-1/2"	<input type="checkbox"/> 3-3/16" <input type="checkbox"/> 9-1/2"	<input type="checkbox"/> With 1/4" Bevel Glass Stops
<input type="checkbox"/> 550 Wide	<input type="checkbox"/> 5-1/2" - No OHCC <input type="checkbox"/> Custom _____	<input type="checkbox"/> 5-1/2" <input type="checkbox"/> Custom _____	<input type="checkbox"/> With 1" Glass Stops
		<input type="checkbox"/> 6-1/2" _____	<input type="checkbox"/> Other _____

CLEARANCES/ THRESHOLDS

Clearance from Bottom of Door to Finish Floor
☐ Custom Specify _____

Thresholds
☐ 4" Standard for Center Hung Doors
☐ 4-3/4" Standard for Offset Hung Doors
☐ Custom Specify _____

☐ By USALUM ☐ By Others

NOTE: Prep Only Requires Manufacturer's Name, Model, and Template
 Manufacturer: _____
 Model: _____

DOOR HINGING

☐ Continuous Geared Hinge
☐ 1 Pair Butt Hinges
☐ Intermediate Butt Hinges for Doors Over 84"
 Add _____ per Door
☐ Top/Bottom Offset Pivots
☐ Standard DH010 Intermediate Pivots
 For Doors Over 84"
 Add _____ per Door
☐ Power Transfer
☐ Center Pivot (Double Acting)
☐ Custom ☐ By USALUM ☐ By Customer
☐ Prep and Install ☐ Prep and Supply
☐ Prep Only ☐ Blank (No Prep)

NOTE: Prep Only Requires Manufacturer's Name, Model, and Template
 Manufacturer: _____
 Model: _____

DOOR SWING QTY

☐ LHR Hinge Left Swing Out _____ ea

☐ RHR Hinge Right Swing Out _____ ea

☐ LH Hinge Left Swing In _____ ea

☐ RH Hinge Right Swing In _____ ea

☐ LHD Hinge Left Double Acting _____ ea

☐ RHD Hinge Right Double Acting _____ ea

☐ PAIR Swing In _____ ea

☐ PAIR Swing Out _____ ea

☐ PAIR Double Acting _____ ea

DOOR OPENING SIZE

☐ 36" x 84"
☐ Custom Single _____
 Door Tag # _____

☐ 72" x 84"
☐ Custom Pair _____
 Door Tag # _____

DOOR FINISH

☐ 11 - Clear Anodized Class I
☐ 22 - Dark Bronze / Black Anodized Class I
☐ 52 - Bone White 70% KYNAR® (2-Coat)
☐ 71 - Standard 70% Kynar® (2-Coat)
 Standard Color per Chart- Specify _____

☐ 71 - Custom 70% KYNAR® (2-Coat) - Specify _____

☐ 71 - Custom 70%KYNAR®(3-Coat) - Specify _____

***MID-PANEL (MUNTIN)**

☐ 5/8" ☐ 4-1/8" ☐ 6-3/16" ☐ 7-1/2"

☐ 2" ☐ 5" ☐ 6-1/2" ☐ 9-1/2"

☐ Other _____

* Dimensions do not include stops.

HARDWARE FINISH DOOR FINISH

• Clear 11, 52, 71
 • Bronze 22
☐ Specify _____

DOOR CLOSER

☐ O.H. Concealed (Double Acting-Prep Only)
☐ Standard Jackson Closer (Supply)
☐ O.H. Concealed (Offset-Prep Only)
☐ Standard Jackson Closer (Supply)
☐ 90° ☐ 105° Hold Open ☐ Yes ☐ No
☐ Floor Closer (Double Acting-Prep Only)
☐ Standard Jackson Floor Closer (Supply)
☐ Floor Closer (Offset-Prep Only)
☐ Standard Jackson Floor Closer (Supply)
☐ CRL Surface Mount Closer (Supply)
☐ Drop Plate
☐ Coordinator
☐ Concealed Top Rail Door Stop/Holder Degree
 * Requires Special Top Rail _____

☐ No Closer Required
☐ Custom ☐ By USALUM ☐ By Customer
☐ Prep and Install ☐ Prep and Supply
☐ Prep Only


NOTE: Prep Only Requires Manufacturer's Name, Model, and Template
 Manufacturer: _____
 Model: _____

FOR OFFICE USE ONLY

TAKEN BY: _____

PRICED BY: _____

EDITED BY: _____

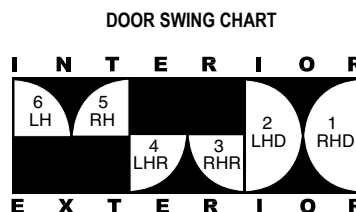

Use the Door Swing Chart to determine how the door(s) should be handed.

LOCKING OPTIONS

- ☐ MS Hookbolt With Two Cylinders - STD
 - ☐ Long Throw Deadlock With Cylinders
 - ☐ 3-Point Locking @ Pair With Cylinders
 - ☐ Latch/Deadlock (DH189) With Cylinders
 - ☐ Thumbturn in Lieu of Cylinder
 - ☐ Latchlock (DH002)
 - ☐ Cylinder (Ext.) ☐ Thumbturn (Int.)
 - ☐ Lock Indicator
 - ☐ Cylinder Guard
 - ☐ Flushbolts
 - ☐ Paddle Handle
 - ☐ Lockset
 - ☐ DH569 Lever Handle
 - ☐ Interior ☐ Back to Back
 - ☐ CRL DL2150 Lever Handle
 - ☐ Interior ☐ Back to Back
 - ☐ Electric Strike
 - ☐ Custom ☐ By USALUM ☐ By Customer
 - ☐ Prep and Install ☐ Prep and Supply
 - ☐ Prep Only ☐ Blank (No Prep)
- NOTE:** Prep Only Requires Manufacturer's Name, Model, and Template
- Manufacturer: _____
- Model: _____

FRAME SYSTEM

- Series 400** 1-3/4" x 4" ☐ Tubular ☐ Open Back
- Series 450** 1-3/4" x 4-1/2" ☐ Tubular ☐ Open Back
- Series 451** 2" x 4-1/2" ☐ Tubular ☐ Open Back
- Flush Front** 4-1/2" ☐ FF450 ☐ FF451
- Flush Front** 6" ☐ FF600 ☐ FF601
- Subframe** ☐ 1" x 4-1/2" ☐ 1" x 4"
- ☐ Custom: Specify _____

FRAME TYPE

- ☐ Up and Over (No Transom)
- ☐ 126" (3.2 m) High With Transom
- ☐ Frame Only
- ☐ Door Only (No Frame)
- ☐ Custom

DOOR SWEEP

- ☐ Yes ☐ No
- ☐ Exposed Fasteners ☐ Concealed Fasteners

CONCEALED SWEEP

- ☐ Top Rail
- ☐ Bottom Rail

PUSH/PULL HARDWARE

- ☐ Standard Push Bars
 - ☐ Standard Push/Pull
 - ☐ Offset Pulls
 - ☐ None
 - ☐ Custom ☐ By USALUM ☐ By Customer
 - ☐ Prep and Install ☐ Prep and Supply
 - ☐ Prep Only
- NOTE:** Prep Only Requires Manufacturer's Name, Model, and Template
- Manufacturer: _____
- Model: _____

PANIC DEVICES

- Concealed Vertical Rod Panics
 - ☐ Jackson 1285
 - ☐ Jackson 2086
 - ☐ Jackson 1085
 - ☐ Adams Rite 8600
 - ☐ With Cylinder on Active Leaf
 - ☐ Exit Only
 - ☐ With Cylinders on Pair (Both Leaf's)


Rim Panics

- ☐ Jackson 1295
- ☐ Jackson 2095
- ☐ Jackson 1095
- ☐ Adams Rite 8800
- ☐ With Cylinder on Active Leaf
- ☐ Exit Only
- ☐ Removable Mullion (For Pair of Doors)
- ☐ With Cylinders on Pair (Both Leaf's)

Mortise Panics


- ☐ Adams-Rite 8400
 - ☐ With Cylinder ☐ Exit Only
 - ☐ CRL-Blumcraft Panic
 - ☐ Custom ☐ By USALUM ☐ By Customer
 - ☐ Prep and Install ☐ Prep and Supply
 - ☐ Prep Only
- NOTE:** Prep Only Requires Manufacturer's Name, Model, and Template
- Manufacturer: _____
- Model: _____

**JACKSON 1285 A LOCATION
CONCEALED VERTICAL
ROD PANIC**

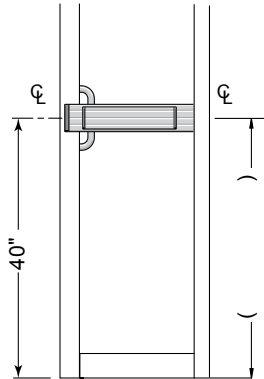


A Standard Location
B Location or Specify

**JACKSON 1295 A LOCATION
RIM PANIC**

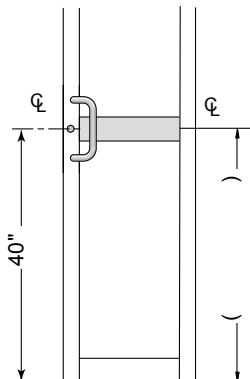

A Standard Location
B Location or Specify

**PUSH / PULL
& CYLINDER**

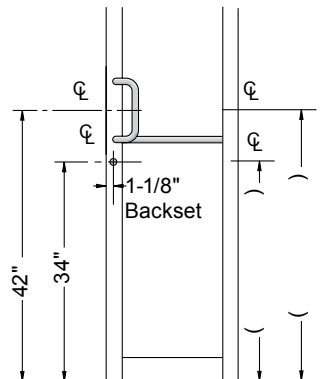

A Standard Location
B Location or Specify

B LOCATION CVR PANIC


Model	Centerline of Bar from Bottom of Door
Jackson 1085 CVR	35-7/8" to CL of Crash Bar
Jackson 2086 CVR	38-5/32"
Jackson 3185 Midpanel CVR	38-5/32"
Jackson 3186 Midpanel CVR	38-5/32"
8600 CVR	39"

B LOCATION RIM/MORTISE

Model	Centerline of Bar from Bottom of Door
Jackson 1095 Rim	35-7/8" to CL of Crash Bar
Jackson 2095 Rim	38-5/32"
Adams Rite 8800 Rim	39"
Adams Rite 8400 Mortise	39"


APPROVED BY _____

DATE _____

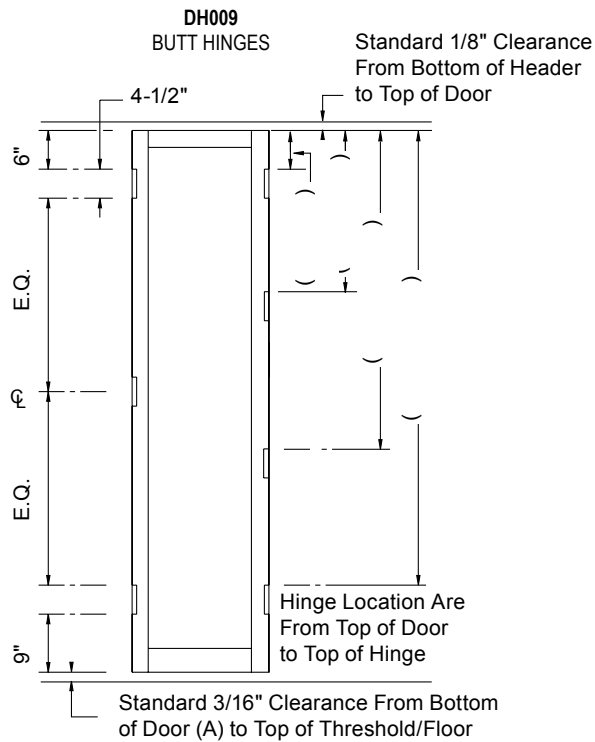


A
Standard
Location

B
Special Location
(Specify)

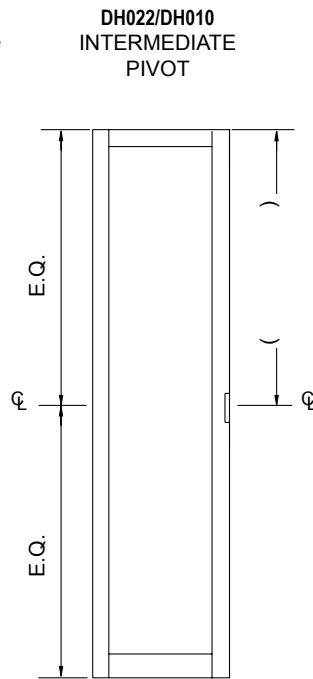

A
Standard
Location

B
Special Location
(Specify)

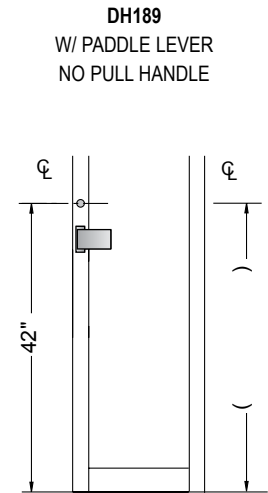

A
Standard
Location

B
Special Location
(Specify)

ADDITIONAL NOTES OR SKETCHES

APPROVED BY _____

DATE _____

FOR OFFICE USE ONLY

TAKEN BY: _____

PRICED BY: _____

EDITED BY: _____

NOTE: PLEASE DOWNLOAD FORM TO SUBMIT. DO NOT FILL FORM ONLINE.

Email completed form to us alum@usalum.com.

Fax checklist to U.S. Aluminum Technical Sales at (877) 883-7547

To review call (800) 627-6440. This form is available online at usalum.com.

CRLAURENCE.COM