



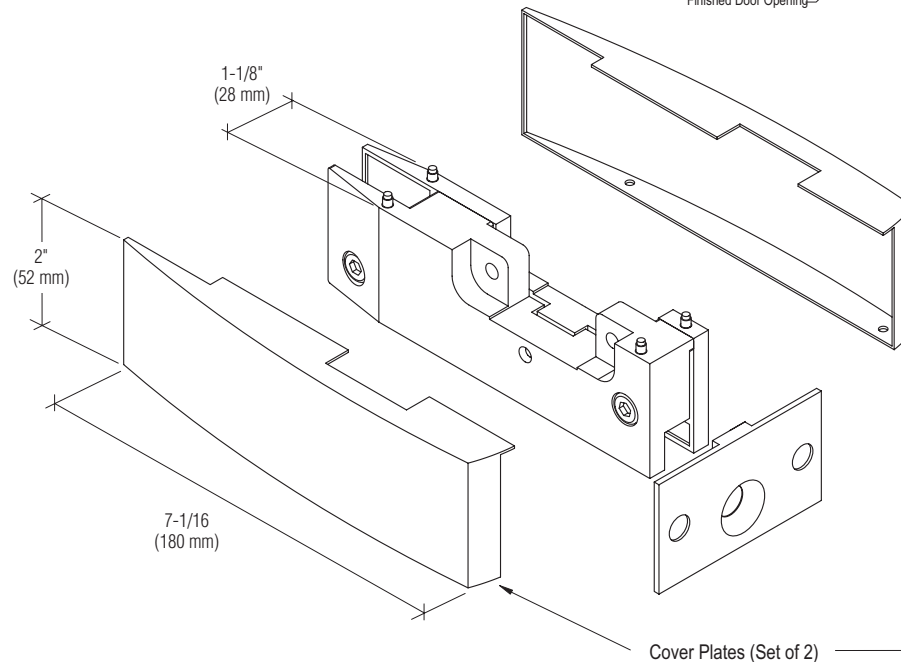

C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

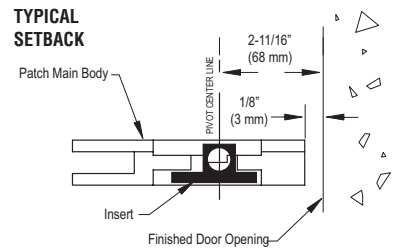

CRL CURVED FACE PLATE WALL MOUNTED TRANSOM PATCH

TYPICAL 2-11/16" (68 mm) SET BACK

INCLUDES: INSERT, COVER PLATES

Cat. No. CPF34

Important Information:

The CPF34 Wall Mount Transom Patch is designed for 2-11/16" (68 mm) set back. This dimension is measured from the "finished" door opening to the pivot center line.

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm) thick tempered safety glass

Construction: High density casting

Glass Fabrication Required: Cut-Out and Hole Required - See Reverse

Includes: Base Fitting, Insert, Cover Plates, Satin Aluminum Wall Mount Plate, Screws, and Gaskets for 3/8" (10 mm) and 1/2" (12 mm) Glass

Available Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel

Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side

For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:



For public safety, we recommend the use of tempered safety glass only.

SEE TEMPLATE ON BACK


Refer to Dimensions Shown to Ensure Accuracy



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

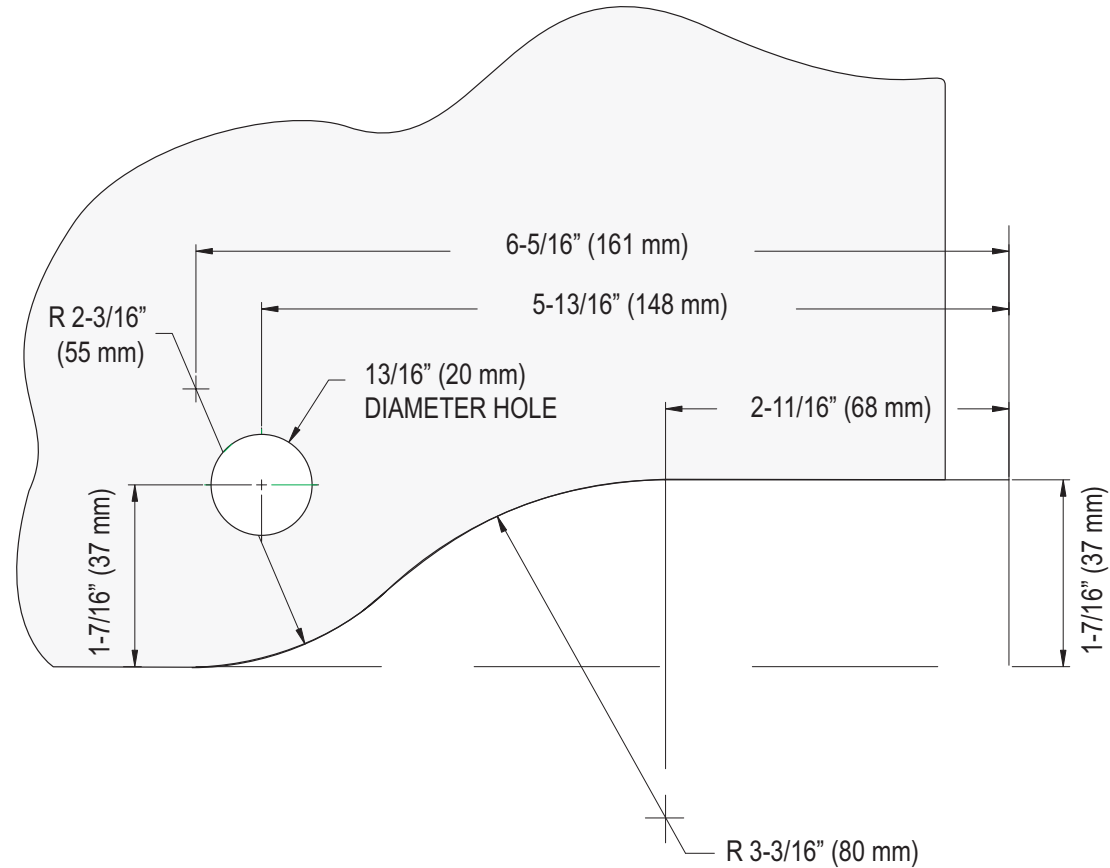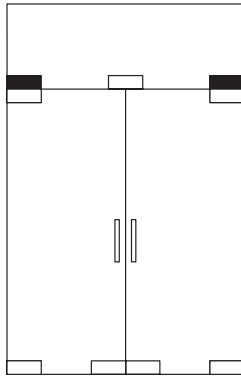

**TRANSOM
GLASS**

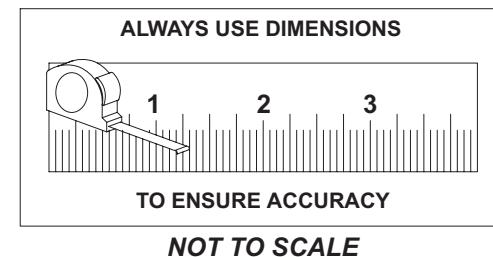

CRL CURVED FACE PLATE WALL MOUNTED TRANSOM PATCH

TYPICAL 2-11/16" (68 mm) SET BACK

Applicable to Cat. No. CPF34