




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

GLASS CLAMPS

Oversized 90° Clamp
(Glass-to-Glass Application)
CAT. No. GCB91

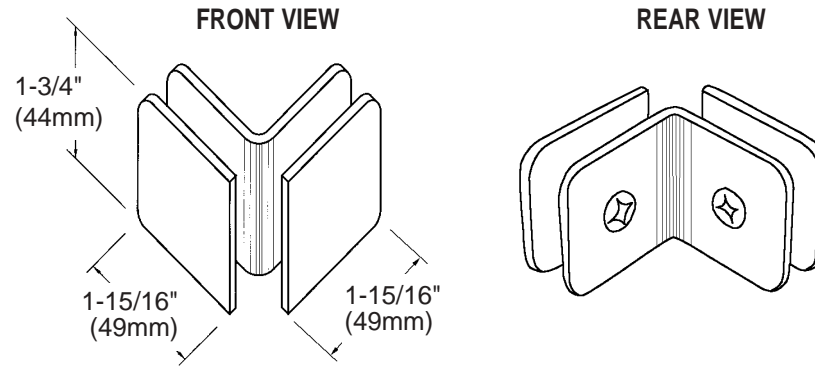

Note: The Clamps shown on this page can also be used in a wall-to-glass application. For information on this see pages 4X-11 and 4X-12.


Specifications:

Material: Solid brass
Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm)
Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
Includes: Mounting screws and gaskets
Note: An additional set of gaskets is required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

Cathedral Style 90° Glass Clamp
(Glass-to-Glass Application)
CAT. No. GCB290

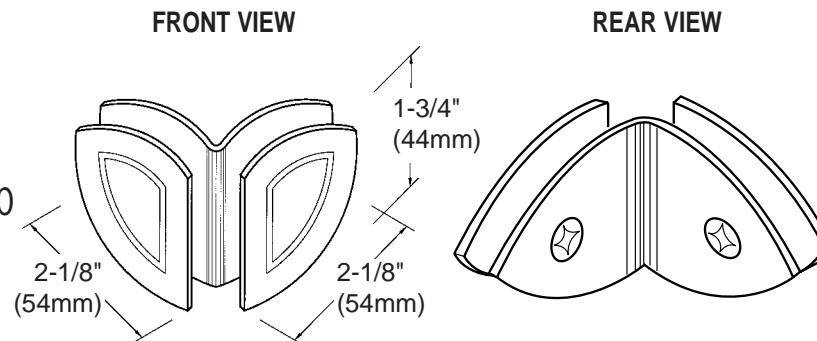


Specifications:

Material: Solid brass
Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm)
Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
Includes: Mounting screws and gaskets
Note: An additional set of gaskets is required for 5/16" (8mm) glass

Template Shown on Next Page

GLASS CLAMPS

Junior Cathedral Style 90° Glass Clamp
(Glass-to-Glass Application)
CAT. No. GCB6290

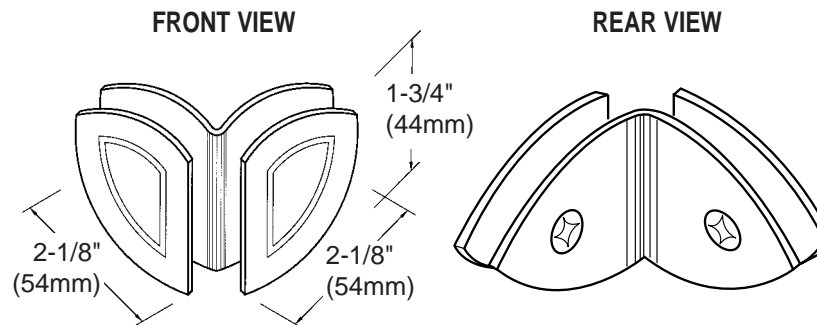

Specifications:

Material: Solid brass
Glass Thickness: 1/4" (6mm)
Hole Size Required: 5/8" (16mm) or 3/4" (19mm)
Includes: Mounting screws and gaskets

Template Shown on Next Page

4X-9