


WINDOW WALLS

OS-2 OFFSET GLAZING SYSTEM




- 2" (50.8 mm) Face Dimension
- 1/4", 3/8" or 1" (6, 10 or 25 mm) Glazing
- Injection Molded Water Deflectors
- Glass Offset to Front
- 4-3/4" and 6" (120 and 152 mm) System Depths for Low-Rise Applications
- Butt Glazed Vertical Option
- Continuous Head and Sill
- Top Load Gasket

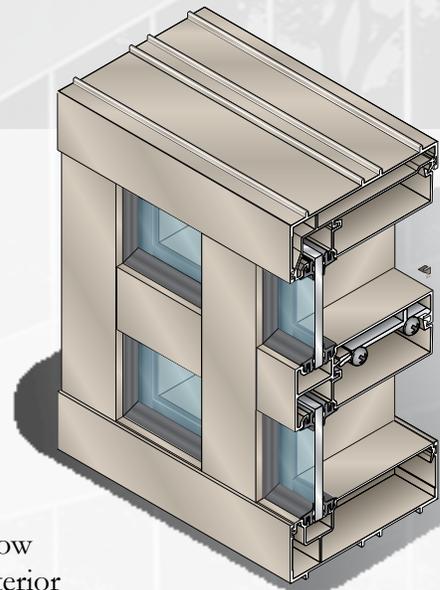




OS-2 Offset Glazing

System Framing offers a shallow face reveal creating a flush exterior appearance. OS-2 is designed for labor-saving stacking type installations, and may be interior or exterior glazed using top load E.P.D.M. glazing gaskets. Internal water deflectors at intersections of intermediate horizontal and vertical mullions allow infiltrated water to be drained into a continuous sill gutter and weeped to the exterior. Optional vertical mullions for structural silicone glazing are available. OS-2 is suitable for storefront or window wall applications, and accommodate most United States Aluminum Entrance Doors.

OS-2 SYSTEMS TYPICAL DETAILS

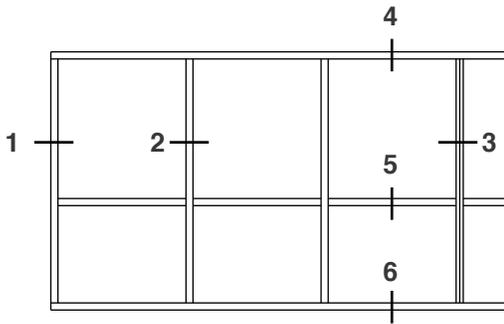

SERIES	WIDTH	DEPTH	GLAZING INFILL	GLAZING METHOD
OS175	2" (50.8)	2" (50.8)	1/4" (6)	Exterior
OS450	2" (50.8)	4-3/4" (120.6)	1/4" (6)	Exterior/Interior
OS451			1" (25)	
OS600	2" (50.8)	6-1/4" (158.7)	1/4" (6)	
OS601			1" (25)	

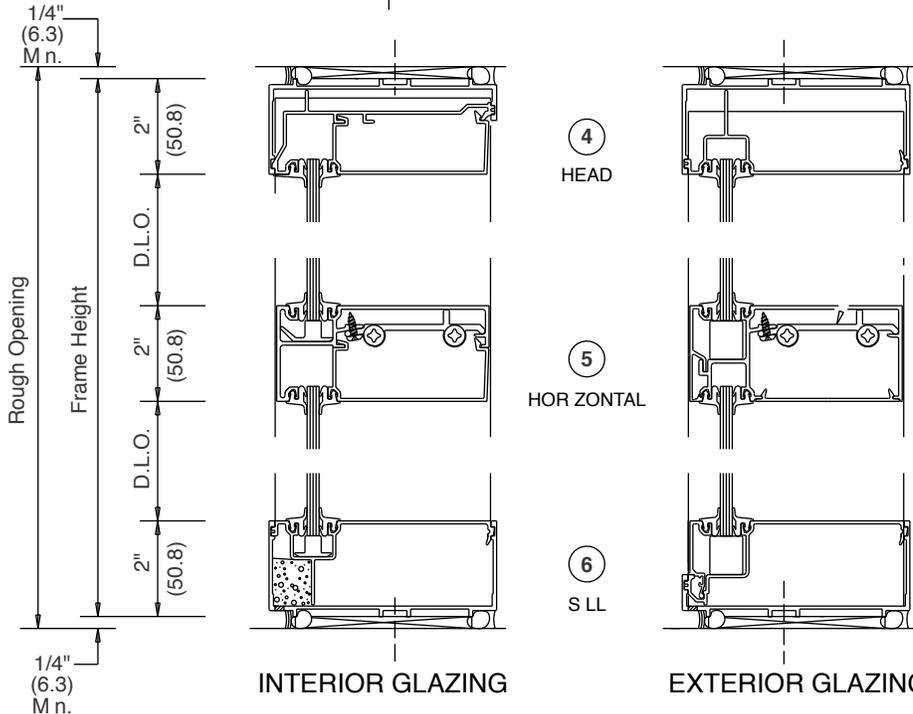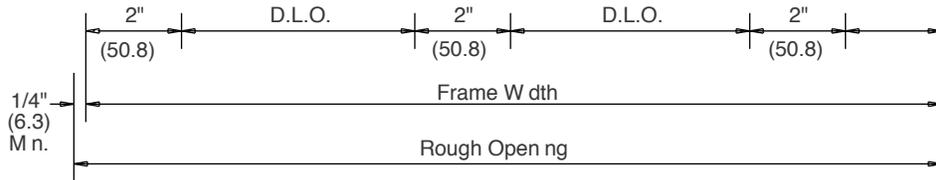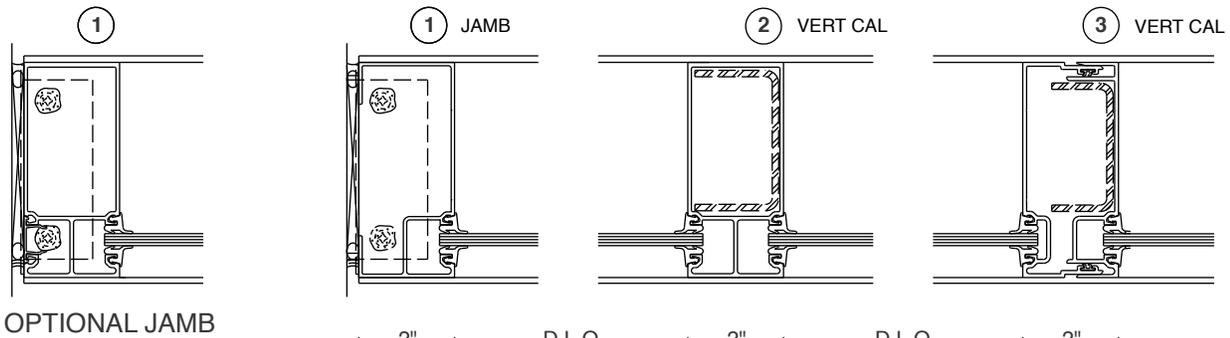

For Specifications, Details, and Testing Data go to usalum.com.

NOT TO SCALE