
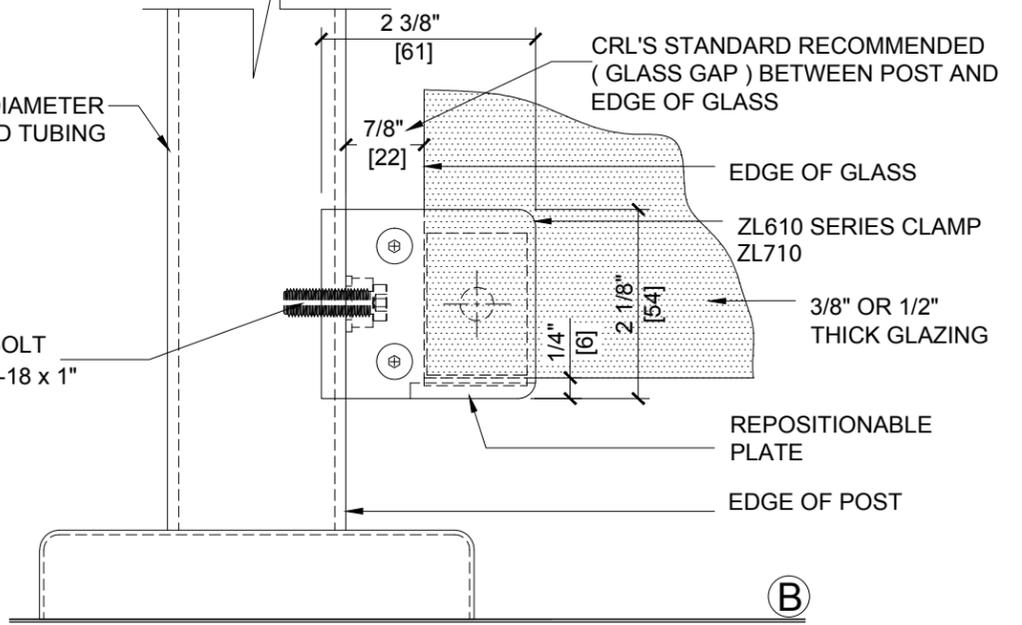


## GLASS FABRICATION TEMPLATE FOR THE Z-SERIES SQUARE TYPE RADIUS BASE CLAMPS @ CORNER CONDITION FOR 3/8" (10mm) AND 1/2" (12mm) GLASS


NO GLASS FABRICATION IS REQUIRED WHEN REPOSITIONABLE PLATE IS USED AT BOTTOM CORNER POINTS OF GLASS

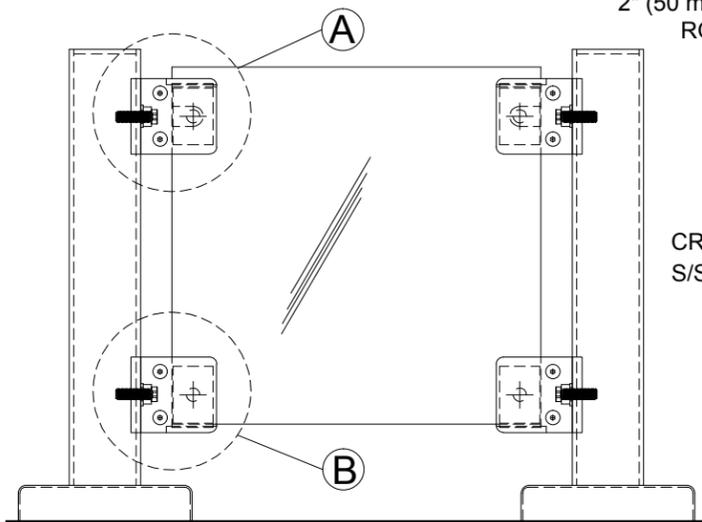

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN. DO NOT SCALE OR DIMENSION ACTUAL DRAWING TO ENSURE ACCURACY

**SPECIFICATIONS:**

- GLASS THICKNESS: SUPPORTS 3/8" (10MM) AND 1/2" (12MM) GLASS
- INCLUDES GASKETS FOR BOTH GLASS THICKNESSES
- BASE DESIGN: RADIUS BACK NON HANDED
- FOR USE WITH: 2" (50.8 mm) DIAMETER ROUND TUBING (SEE CHART).
- MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.
- GLASS FABRICATION: NO GLASS FABRICATION IS REQUIRED WHEN REPOSITIONABLE PLATE IS USED AT BOTTOM CORNER POINTS.
- INCLUDES: RUBBER GASKETS AND REMOBE STEEL PIN WITH GROMMET.

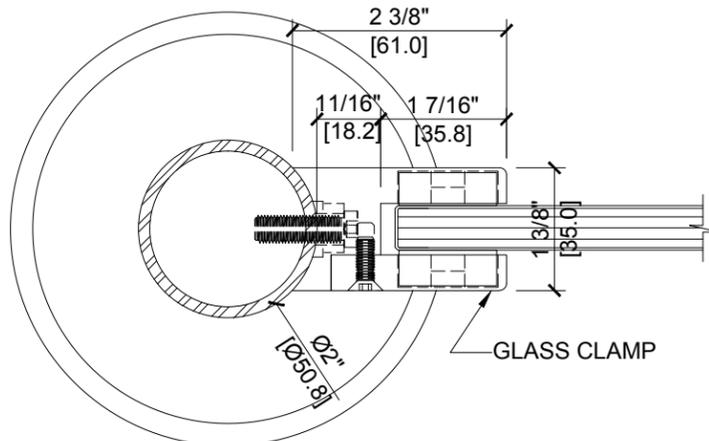

**TEMPLATE USED FOR:**

CATALOG NUMBER	TUBE DIA
ZL610BN	2" (50.8 mm)
ZL610CH	2" (50.8 mm)
ZL610SC	2" (50.8 mm)
ZL610W	2" (50.8 mm)
ZL710BS	2" (50.8 mm)
ZL710PS	2" (50.8 mm)

<b>CRL</b> C.R.LAURENCE CO. ®	ARCHITECTURAL PRODUCTS PH: 800-421-6144 FX: 800-262-3299 WWW.CRLAURENCE.COM	DESCRIPTION: <b>Z-SERIES SQUARE TYPE RADIUS BASE GLASS CLAMP</b>	CAT. NO: (SEE CHART)	DATE: 01/06/14
		FOR 3/8" (10 mm) & 1/2" (12mm) THICK GLASS	FILE NAME: ZL610-Gls Fab	SCALE: 6"=1'-0"
		DRAWN BY: J.V.	CHECKED BY: R.D.	SHT 1 OF 2

## GLASS FABRICATION TEMPLATE FOR THE Z-SERIES SQUARE TYPE RADIUS BASE CLAMPS FOR 3/8" (10mm) AND 1/2" (12mm) GLASS

3/8" OR 1/2"  
GLAZING

5/8"  
[16]

Ø9/16"  
[Ø14]

(1) FABRICATION SLOT CUTOUT IS REQUIRED WHEN USING THE PROVIDED STEEL PIN



ALWAYS USE DIMENSIONS SHOWN ON THE PLAN. DO NOT SCALE OR DIMENSION ACTUAL DRAWING TO ENSURE ACCURACY

**SPECIFICATIONS:**

- GLASS THICKNESS: SUPPORTS 3/8" (10MM) AND 1/2" (12MM) GLASS
- INCLUDES GASKETS FOR BOTH GLASS THICKNESSES
- BASE DESIGN: RADIUS BACK NON HANDED DESIGN
- FOR USE WITH: 2" (50.8 mm) DIAMETER ROUND TUBING (SEE CHART).
- MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.
- GLASS FABRICATION: FOR 3/8" (10MM) AND 1/2" (12MM) THICK GLASS A 9/16" (14MM) DIAMETER FINGER SLOT IS REQUIRED WHEN USING THE REQUIRED STEEL PIN FOR GLASS SUPPORT
- INCLUDES: RUBBER GASKETS AND STEEL PIN WITH GROMMET.

2" (50 mm) DIAMETER  
ROUND TUBING

CRL-ZBOLT  
S/S 5/16"-18 x 1"

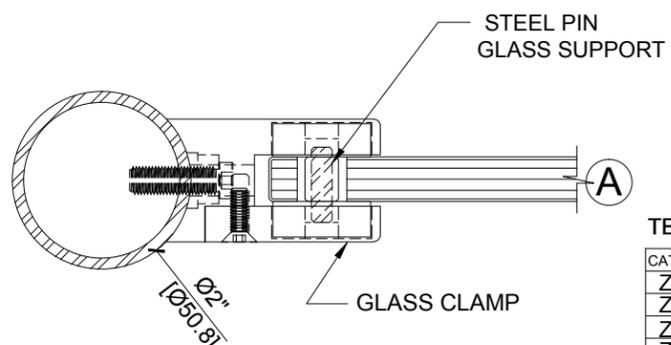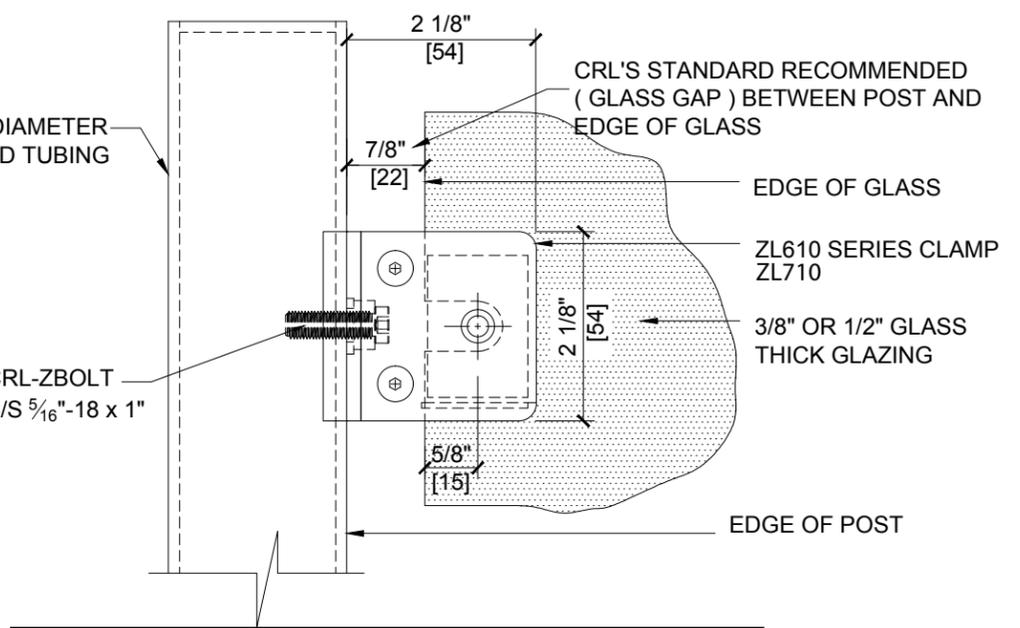

**TEMPLATE USED FOR:**

CATALOG NUMBER	TUBE DIA
ZL610BN	2" (50.8 mm)
ZL610CH	2" (50.8 mm)
ZL610SC	2" (50.8 mm)
ZL610W	2" (50.8 mm)
ZL710BS	2" (50.8 mm)
ZL710PS	2" (50.8 mm)

<b>CRL</b> C.R.LAURENCE CO. ®	ARCHITECTURAL PRODUCTS PH: 800-421-6144 FX: 800-262-3299 WWW.CRLAURENCE.COM	DESCRIPTION: <b>Z-SERIES SQUARE TYPE RADIUS BASE GLASS CLAMP</b>	CAT. NO: (SEE CHART)	DATE: 01/06/14
		FOR 3/8" (10 mm) & 1/2" (12mm) THICK GLASS	FILE NAME: ZL610-Gls Fab	SCALE: 6"=1'-0"
		DRAWN BY: J.V.	CHECKED BY: R.D.	SHT 2 OF 2