



INSTALLATION INSTRUCTIONS

CAD101 AND CLD103 CLEAR VISION SPEAK-THRUS

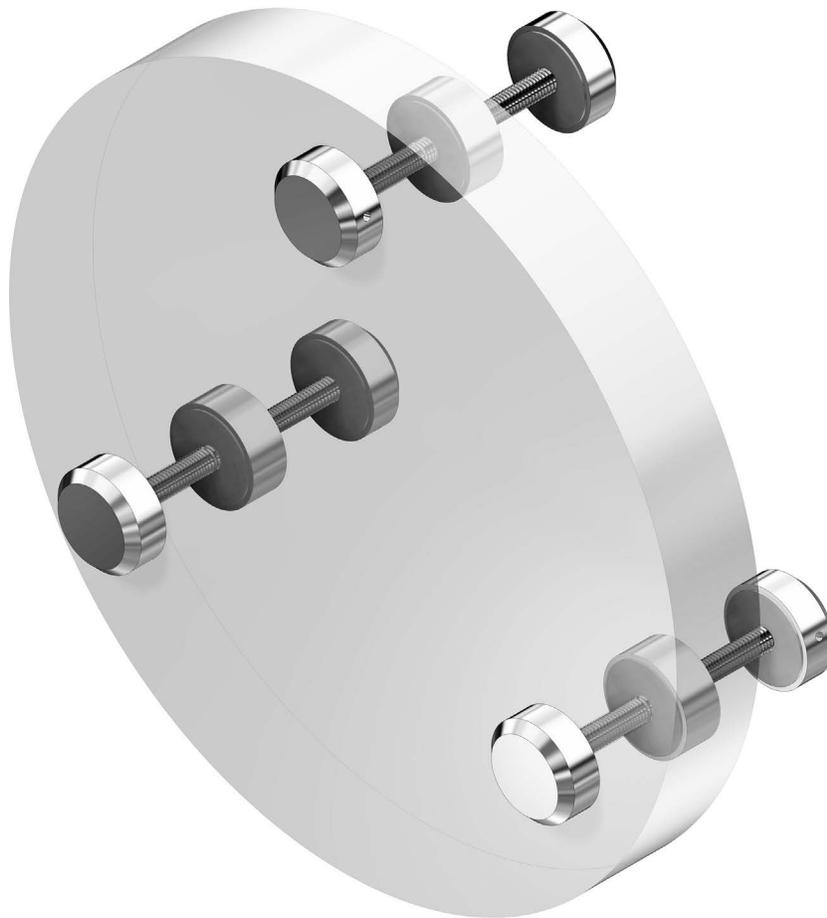


2503 E. Vernon Avenue, Los Angeles, CA 90058-1826
Phone: (800) 421-6144 Ext. 7760 Fax (800) 458-7496
crlaurence.com Email: transaction@crlaurence.com


MODEL IDENTIFICATION



CAD101
Clear Vision Speak-Thru with
1-1/4" (32 mm) Thick Acrylic
10" (254 mm) Diameter Disc
Level 1 Protection



CLD103
Clear Vision Speak-Thru with
1-1/4" (32 mm) Thick Lexgard
10" (254 mm) Diameter Disc
Level 3 Protection



CDS3S
Stainless Spacer Studs
3 Sets
(Disc Not Included)


IMPORTANT: READ THIS MANUAL THOROUGHLY BEFORE BEGINNING INSTALLATION.

SPECIFICATIONS

- For use with Plastic Glazing Materials only. Not for use on glass.
- Interior use only. Not for an interior / exterior application.
- Designed for mounting onto 1-1/4" (32 mm) Plastic Glazing only. (Threaded shafts can be cut down for thinner glazing.)

FABRICATION REQUIRED


NOTE: Do not use this drawing as a template. Provided for dimensions only. Polished edge work for cut-out is recommended.

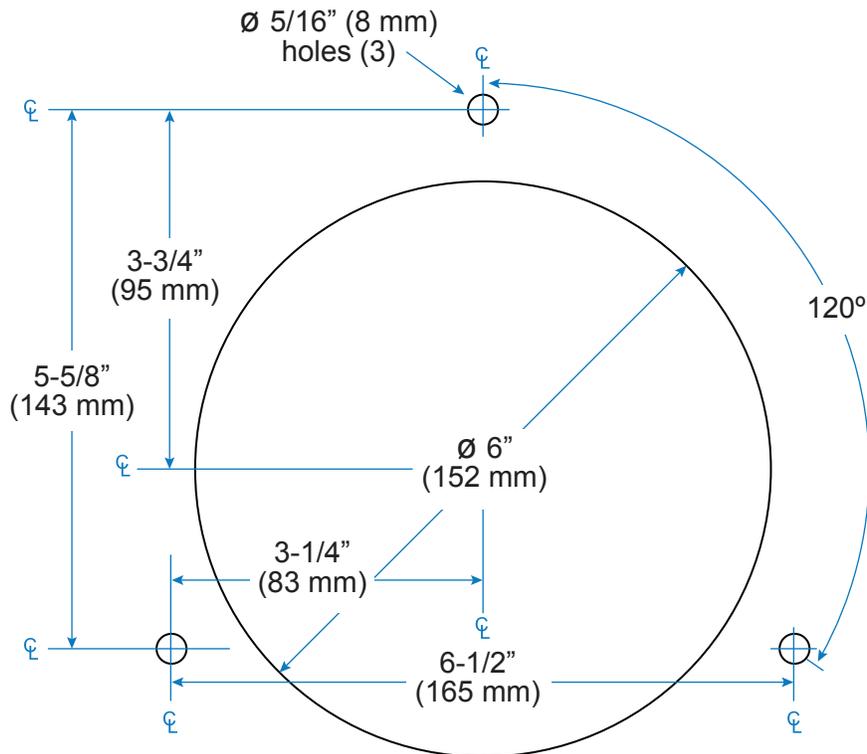


NOT TO SCALE

INSTALLATION


- ① Twist Threaded Shaft into Stainless Steel Cap to install. Place Clear Plastic Washer over Threaded Shaft next to Cap. Assemble 3 sets.

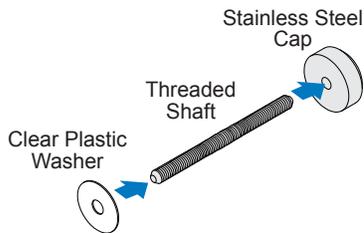


- ② Insert Threaded Shafts into holes in window from Customer Side. Hold in place with masking tape.

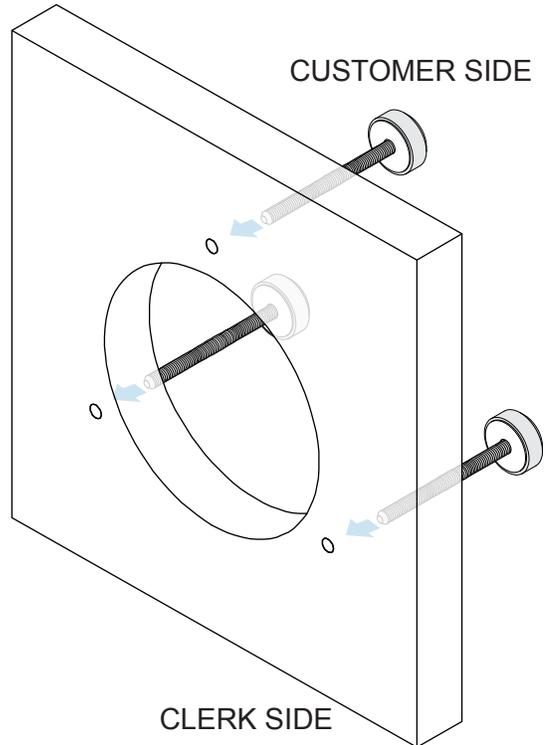

- ③ From Clerk Side, place one Clear Plastic Washer, one Stainless Steel Spacer, and another Clear Plastic Washer on each Threaded Shaft.

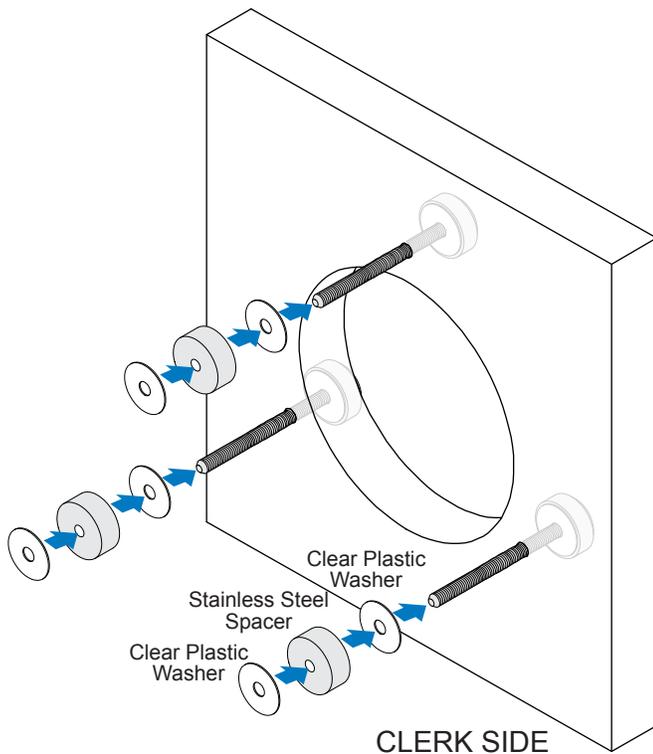


- ④ Place 10" (254 mm) Clear Disc over Threaded Shafts. Push against Spacers and Washers to eliminate gaps.

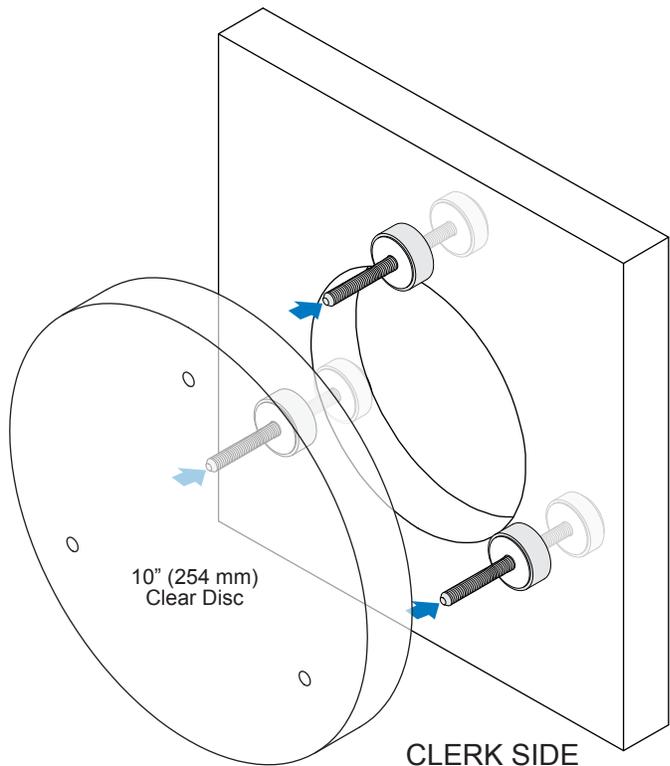

INSTALLATION (CONTINUED)

- ⑤ Place one Clear Plastic Washer and one Stainless Steel Cap on each Threaded Shaft and finger tighten to eliminate any gaps between the Disc, Spacer, and Washers.

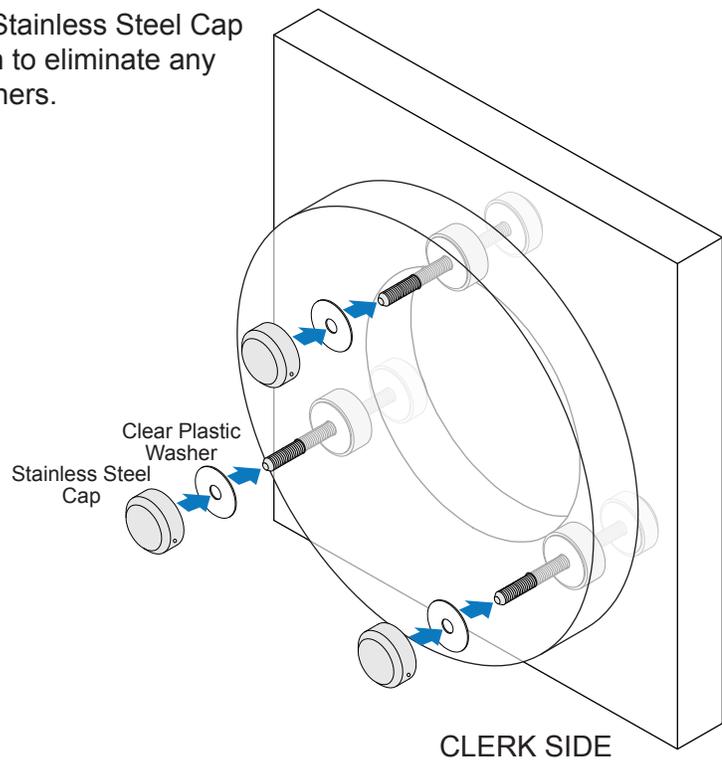

- ⑥ Insert **Cat. No. S0W** Spanner Wrench (sold separately) in hole on the side of the Cap and turn to tighten securely. Tighten all Caps on both sides of the window.

