


Content

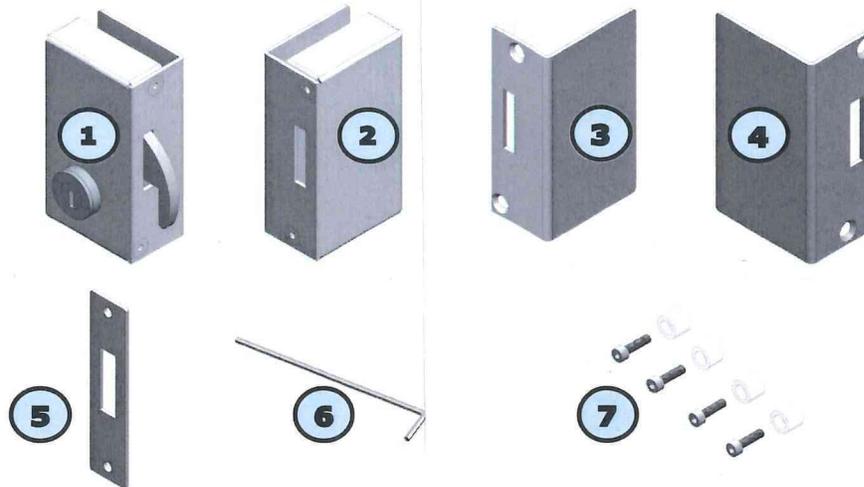


Application Guide

- 1) For glass door 3/8" + fixed glass panel 3/8" : Use **1** + **2**
- 2) For glass door 1/2" + fixed glass panel 1/2" : Change **3** on **1** and **4** on **2**
- 3) For glass door 3/8" + wall: Use **1** + **5**
- 4) For glass door 1/2" + wall : Change **3** on **1** + **5**

Optional threaded pins: Improve the security of the installation by placing these **7**

The pins are not a requirement for the installation of the lock, but in case of use, make a $\varnothing 1/2''$ drill hole in the glass according to this drawing:

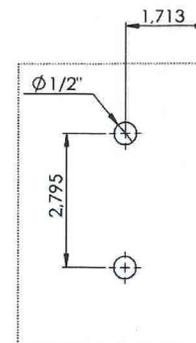

Mounting instructions:

Use silicone sealant to fix both the lock and the keep onto the glass.



The Allen Key (6) is used both to mount the pins (7) onto the lock and the keep, and also to fix the angles (3+4) onto the lock and the keep.