






DRILL & TAP
FOR
8-32 FHMS (UND)
(4 PLACES)

ROUTING INSTRUCTIONS 1275 PANIC

1. PREPARE ACTIVE SIDE PER VIEW #1.
2. PREPARE INACTIVE STILE PER VIEW #2.
3. PREPARE THRESHOLD PER VIEW #3 & #3A.
4. PREPARE HEADER PER VIEW #4 & #4A.
5. SEE SHEETS 2 & 3 FOR INSTALLATION OF 1275 PANIC DEVICE.

OPTIONAL SEX BOLT MTG.

SEX BOLT MTG. ORDER PKG. 30-1818-FINISH
1/4-20 COMBO SCR. SUPPLIED WITH PANIC
ALUM. OR HOLLOW METAL DOOR

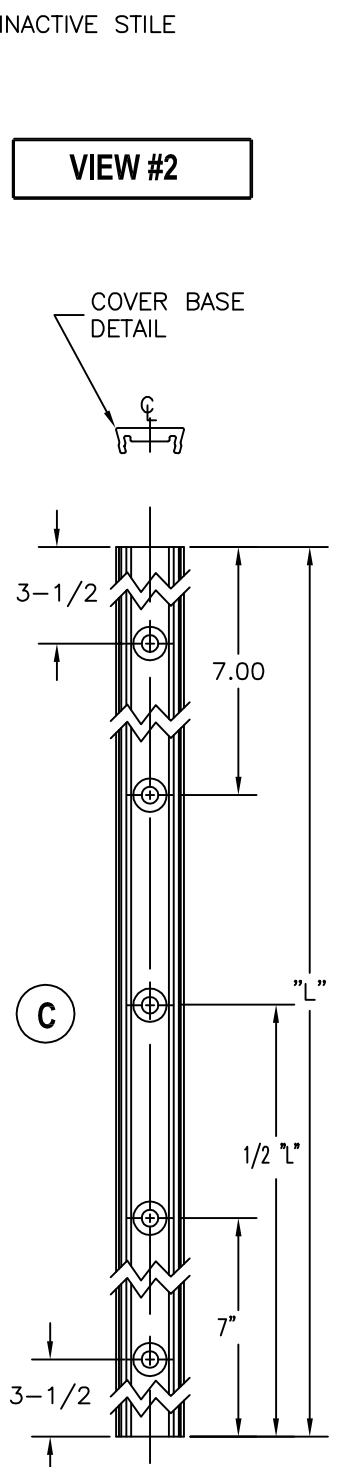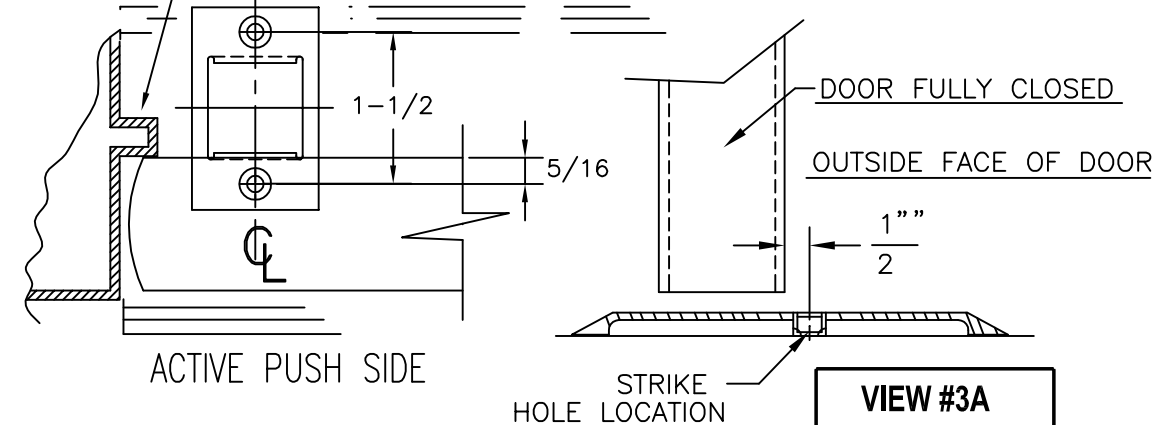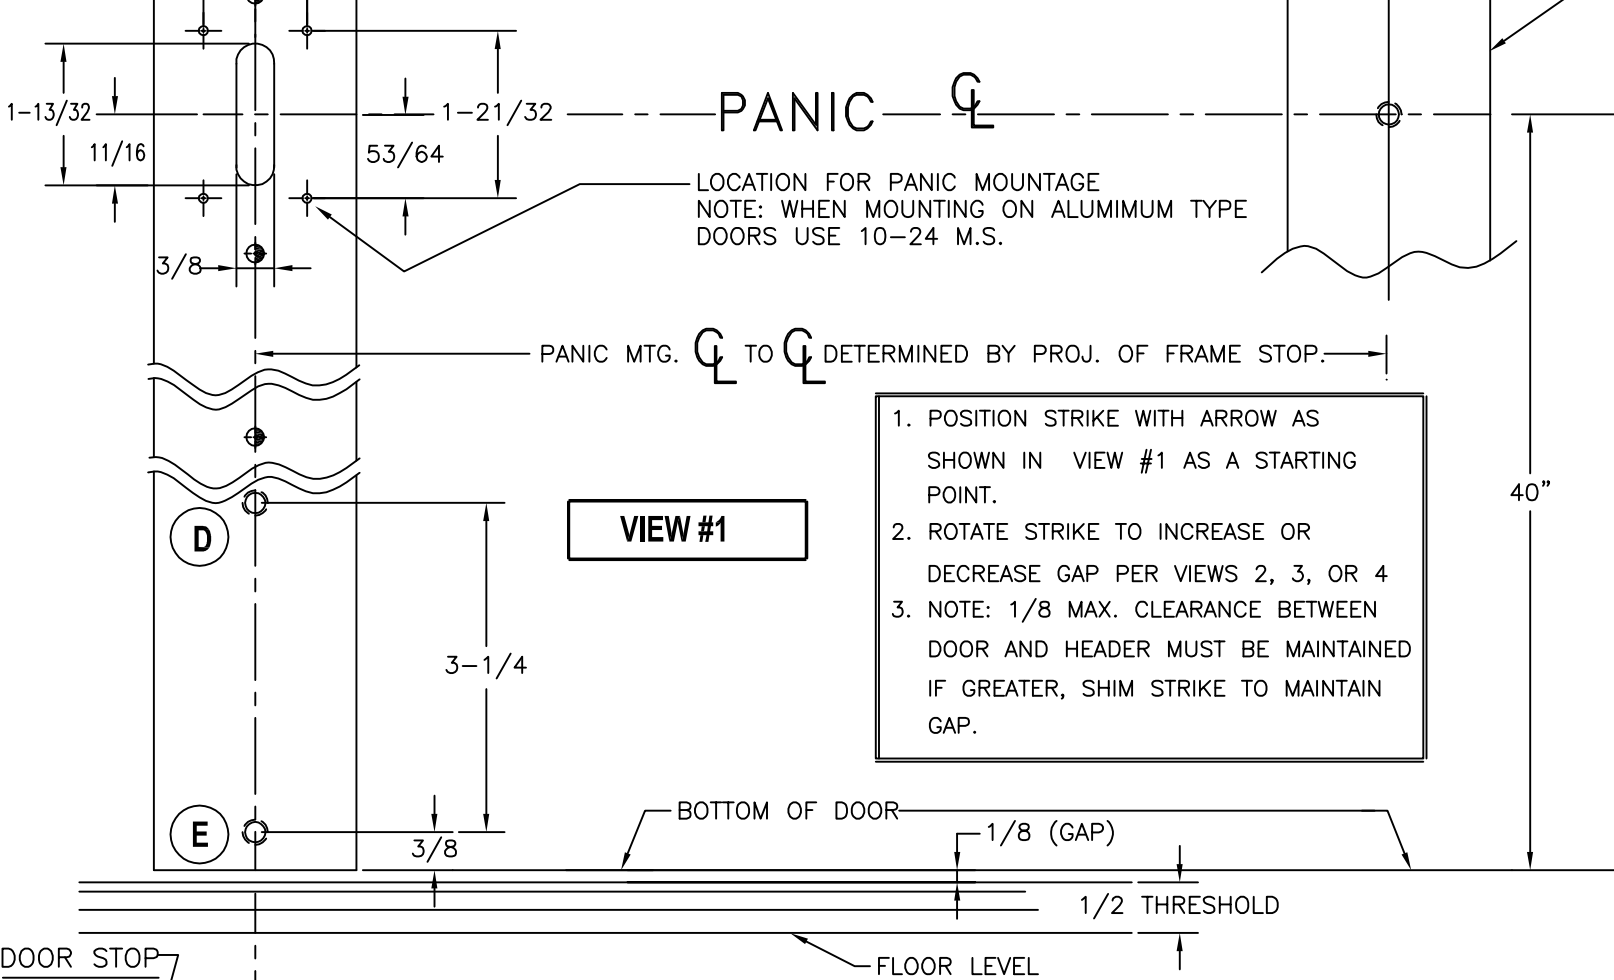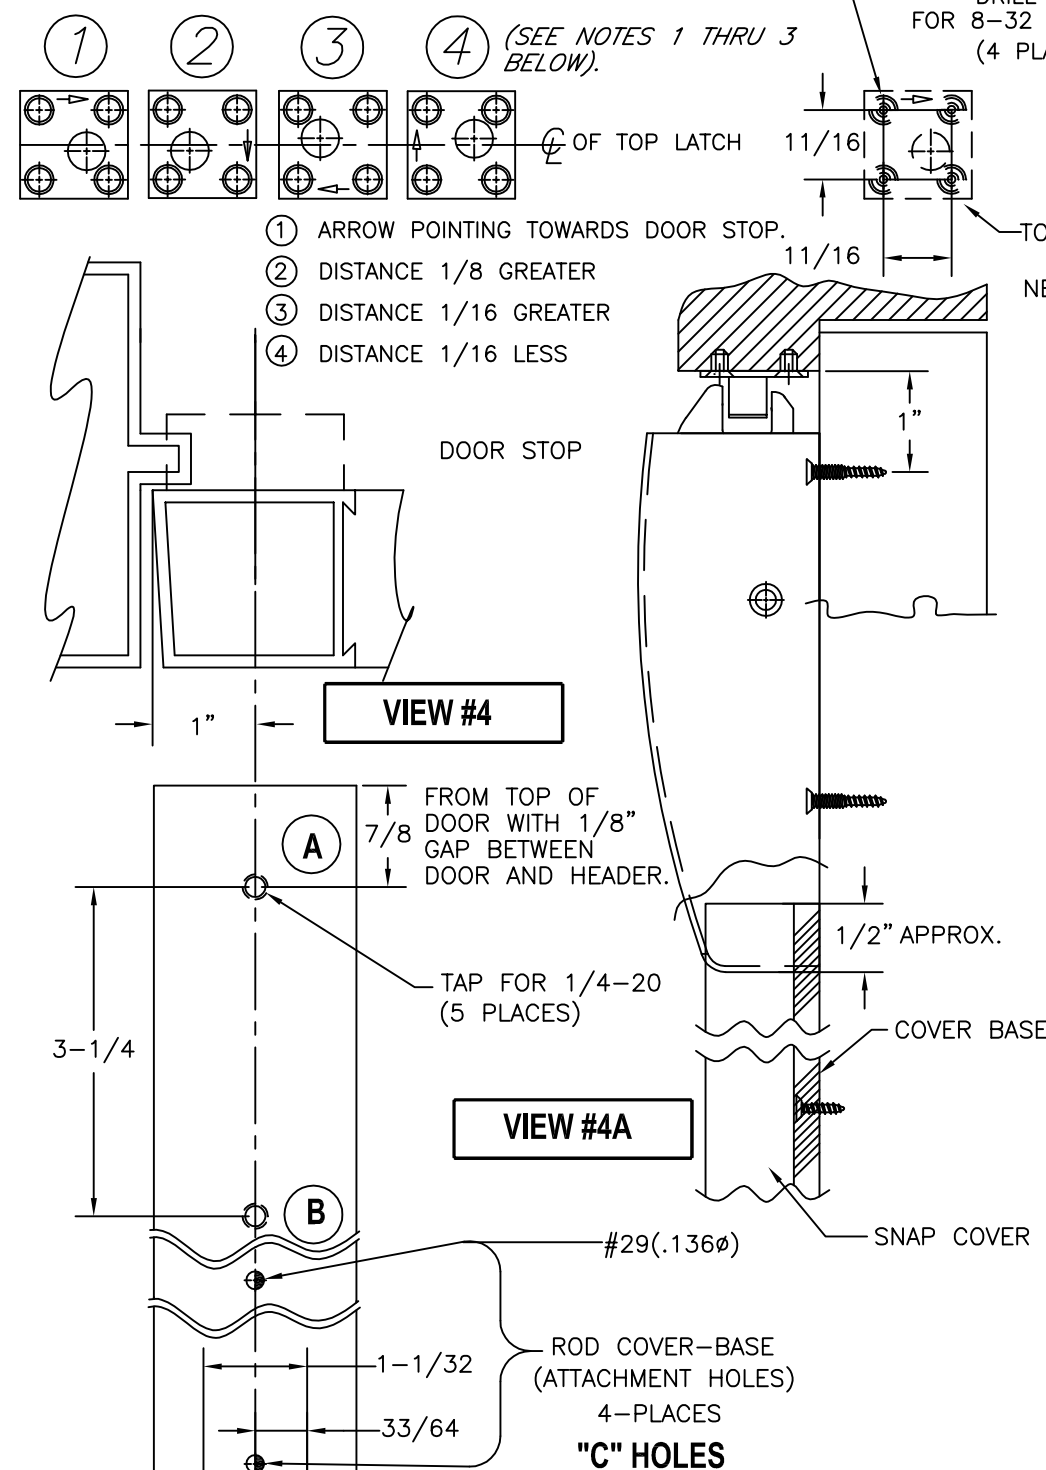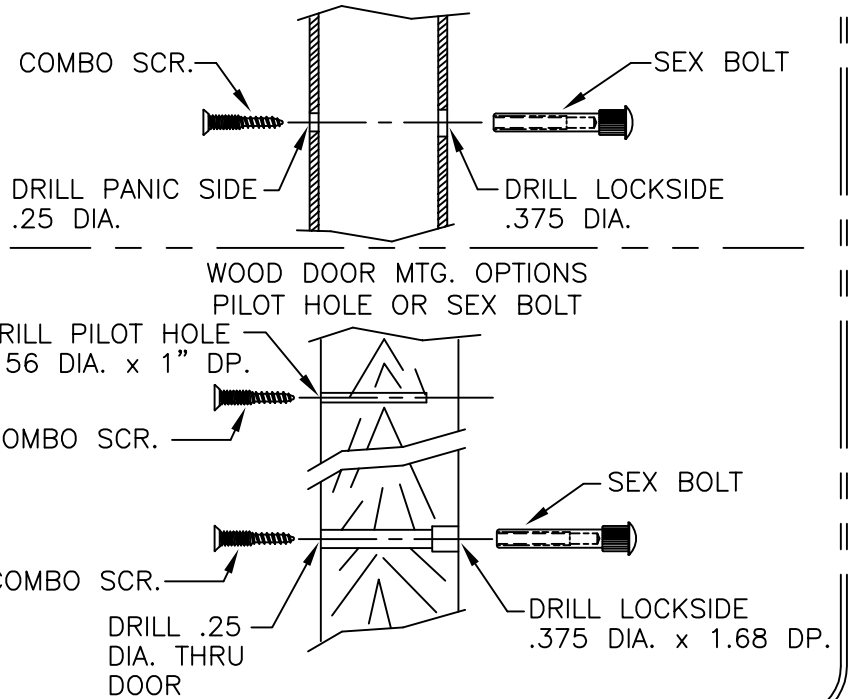

LOOKING DOWN ON THRESHOLD

FILE NO. 10-1082-1	NEXT ASSY.	QTY. USED 1	E 5.26.05 REF. PG 3 OF 3	APPROVALS APPROVED CHECKED DRAWN R.M. 01.15.03	DATE SCALE FULL	ECN1841 RM
MATERIAL			ROUTING INSTRUCTION 1275 SVR		SHEET 1 OF 3 SHEETS DWG. NO. 10-1082-1 REV. E	
FINISH SEE NOTES			HEAT TREAT		jackson CORPORATION 3447 UNION PACIFIC AVE. LOS ANGELES, CALIF. 90023	