


Specifications:

Material:	Solid Brass
Glass Thickness:	1/4" (6mm) to 1/2" (12mm)
Notch Required	
Includes:	Mounting screws and gaskets

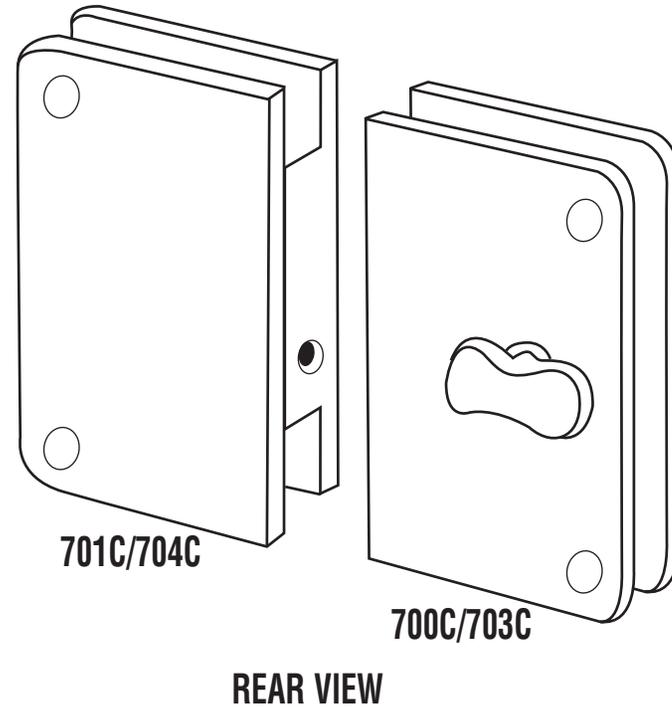

Template Shown on Next Page

**GLASS DOOR LOCK WITH INDICATOR AND GLASS DOOR KEEPER
CAT. NO. 700C, 701C, 703C AND 704C**


***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

NOTE:

When using Cat. no. 700C, the minimum clearance between the door glass and the wall/panel is 1/8" (3mm), and the maximum clearance is 1/2" (12mm). The standard recommended clearance is 3/16" (5mm).

NOTE:

When using Cat. no. 703C and 704C the clearance between panels is 1/16" (1.5mm) to 1/8" (3mm).



**GLASS DOOR LOCK WITH INDICATOR AND GLASS DOOR KEEPER
CAT. NO. 700C, 701C, 703C AND 704C**

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

IMPORTANT: Project measurements from the edge of the glass.

