



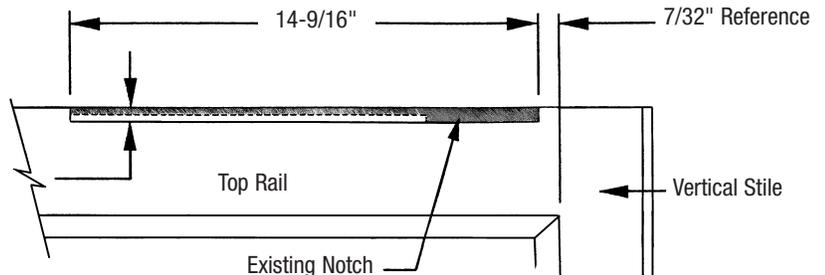

# C.R. LAURENCE CO. INC

## Installation Instructions Retrofit Kit for Pre '98 Husky Closers

### DOOR RAIL NOTCH MODIFICATION FOR SINGLE ACTING DOORS

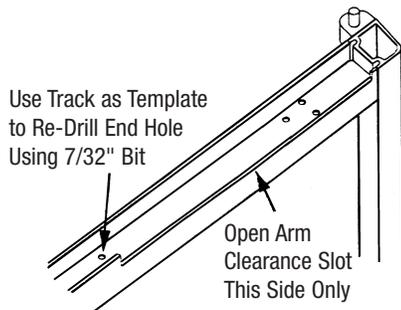

Mark Arm Clearance Slot as Shown Above.  
Rout Out Entire Clearance Slot on Interior Side Only.

### ASSOCIATED PRODUCTS

#### CRL OVERHEAD DOOR CLOSER BODIES WITH MOUNTING CLIPS

- 20 Models Available
- 5 Year Limited Warranty
- U.L. Listed



Closer Body With Mounting Clips



An assortment of Overhead Door Closer Bodies with Mounting Clips are available in 20 models. A choice of spring tensions for Standard Models include light duty, medium duty and heavy duty. A.D.A. Compliant Models offer 5lb. for interior use, and 8.5lb. for exterior use. Both models include both Hold Open and No Hold Open styles, in both 90° and 105°. The Mounting Clips included with each Closer can be discarded if not pertinent to your application.

#### REQUIRED CLOSER DUTY FOR YOUR APPLICATION

MODEL	TENSION	DOOR SIZE
Standard	Light Duty	Up to 30" Wide x 96" High
Standard	Medium Duty	31" to 41" Wide x 96" High
Standard	Heavy Duty	42" to 48" Wide x 96" High
A.D.A. Compliance	ADA-5 lb. (Interior)	36" to 48" Wide x 96" High
A.D.A. Compliance	ADA-8.5 lb (Exterior)	36" to 48" Wide x 96" High

#### STANDARD MODELS

TENSION	90° HOLD OPEN CAT. NO.	90° NO HOLD OPEN CAT. NO.	105° HOLD OPEN CAT. NO.	105° NO HOLD OPEN CAT. NO.
Light Duty	CRL7060	CRL7062	CRL7070	CRL7072
Medium Duty	CRL7160	CRL7162	CRL7170	CRL7172
Heavy Duty	CRL7260	CRL7262	CRL7270	CRL7272

#### A.D.A. COMPLIANCE MODELS MEET THE REQUIREMENTS OF THE AMERICANS WITH DISABILITIES ACT.

TENSION	90° HOLD OPEN CAT. NO.	90° NO HOLD OPEN CAT. NO.	105° HOLD OPEN CAT. NO.	105° NO HOLD OPEN CAT. NO.
A.D.A.-5 lb.	CRL6860	CRL6862	CRL6870	CRL6872
A.D.A.-8.5 lb.	CRL6960	CRL6962	CRL6970	CRL6972

#### "K" TYPE END LOADING TOP ARM ASSEMBLY

- 5/8" Depth Top Rail



"K" Type End Loading Top Arms have no in or out adjustment. The two bolts in the end of the arm adjust the centering of the door. Used in 5/8" depth top rails with an opening at the end of the rail.

CAT. NO. CRL8010K

#### "V0" TYPE SURFACE MOUNT OFFSET ARM ASSEMBLY

- 9/16" Depth Top Rail



The "V0" Type Offset Arm Assembly operates with the slide block sliding up and down a track that has been mortised into the webbing of the door.

CAT. NO. CRL8020V0XAL Painted Aluminum  
CAT. NO. CRL8020V0XBRZ Painted Bronze



C.R. LAURENCE  
OF NORTH AMERICA

Phone (800) 421-6144 Ext. 777 • Fax (800) 587-7501 • E-Mail techsales@crlaurence.com