


CEILING MOUNT Glass Fabrication

CAT. NO. VPK33

TYPICAL INSTALLATION

4. 4

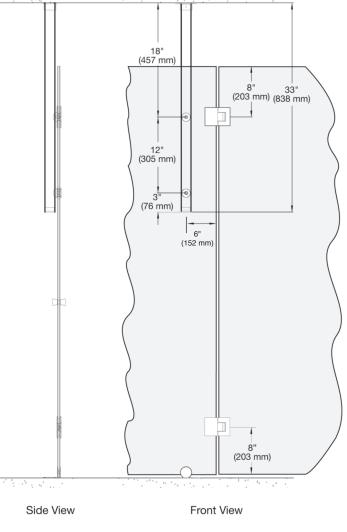

Specifications:

Material: Glass Thickness Range: Hole Size Required: Stainless Steel or Brass Tubing 5/16" (8mm) to 1/2" (12mm) 3/4" (19mm)

The VPK33 requires (2) 3/4" (19 mm) holes in the fixed glass. The holes must be 12" (305 mm) from center-to center. The recommended distance in from the vertical edge of the glass is 6" (152 mm).

Note: There are size limitations when hinging a door off a panel fastened using the VPK33. Call our Frameless Shower Department for details.

Kit Contents:

Each – 33" (838 mm) length of 2" (51 mm) diameter
ound Tubing, two Rivet Nuts, and Flat Style End Cap
Each – Tube Adapters with 1-1/2" (38 mm) diameter
End Caps (with Threaded Stud)
Each – Removable Top Flange with Set Screw

*NOTE: Do not exceed either maximum weight or width when choosing proper quantity of hinges.

For Technical Assistance in the United States and Canada 1.800.421.6144. Press 2, then option 1

C.R. Laurence Co., Inc. • 2503 E. Vernon Ave., Los Angeles, CA 90058 • 1.800.421.6144 • crlaurence.com

4U-34