




## Important Information:

The CPF Right or Left Hand Sidelite Mount Transom Patch is designed for 2-11/16" (68 mm) set back. This dimension is measured from the "finished" door opening to the pivot center line.

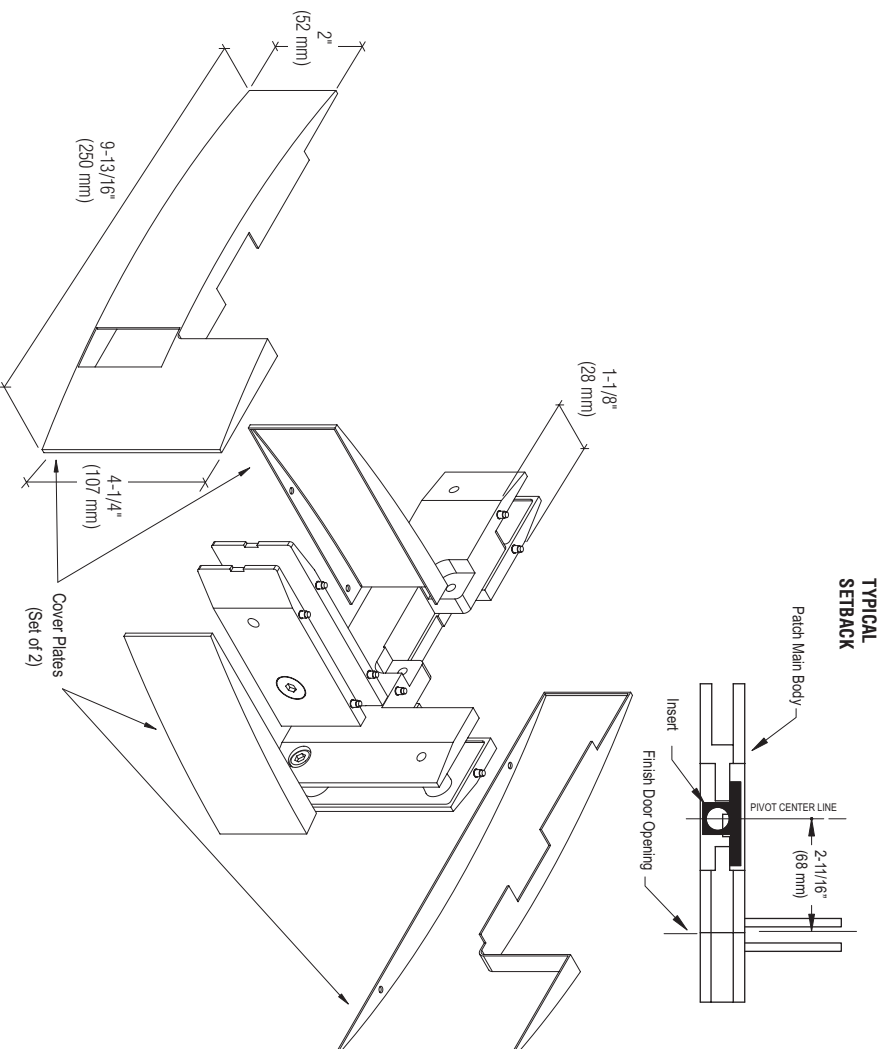

# CRL CURVED FACE PLATE SIDELITE MOUNTED TRANSOM PATCH WITH SUPPORT FIN BRACKET

TYPICAL 2-11/16" (68 mm) SET BACK

INCLUDES: INSERT, COVER PLATES

**Cat. No. CPF41R**

**Cat. No. CPF41L**

## Specifications:

**Glass Sizes:** 3/8" (10 mm) to 1/2" (12 mm) thick tempered safety glass

**Construction:** High density casting

**Glass Fabrication Required:** Cut-Out and

Hole Required - See Reverse

**Includes:** Base Fitting, Insert, Cover Plates, Screws,

and Gaskets for 3/8" (10 mm) and 1/2" (12 mm) Glass

**Accessories:** (Included) - None

**Available Finishes:**

- Brushed Stainless Steel
- Polished Stainless Steel

## Use of Gaskets:

**For 3/8" (10 mm) Glass:** Use two gaskets on each side



**For 1/2" (12 mm) Glass:** Use one gasket on each side

## Recommendations:

For public safety, we recommend the use of tempered safety glass only.

**SEE TEMPLATE ON BACK**

**Refer to Dimensions Shown to Ensure Accuracy**

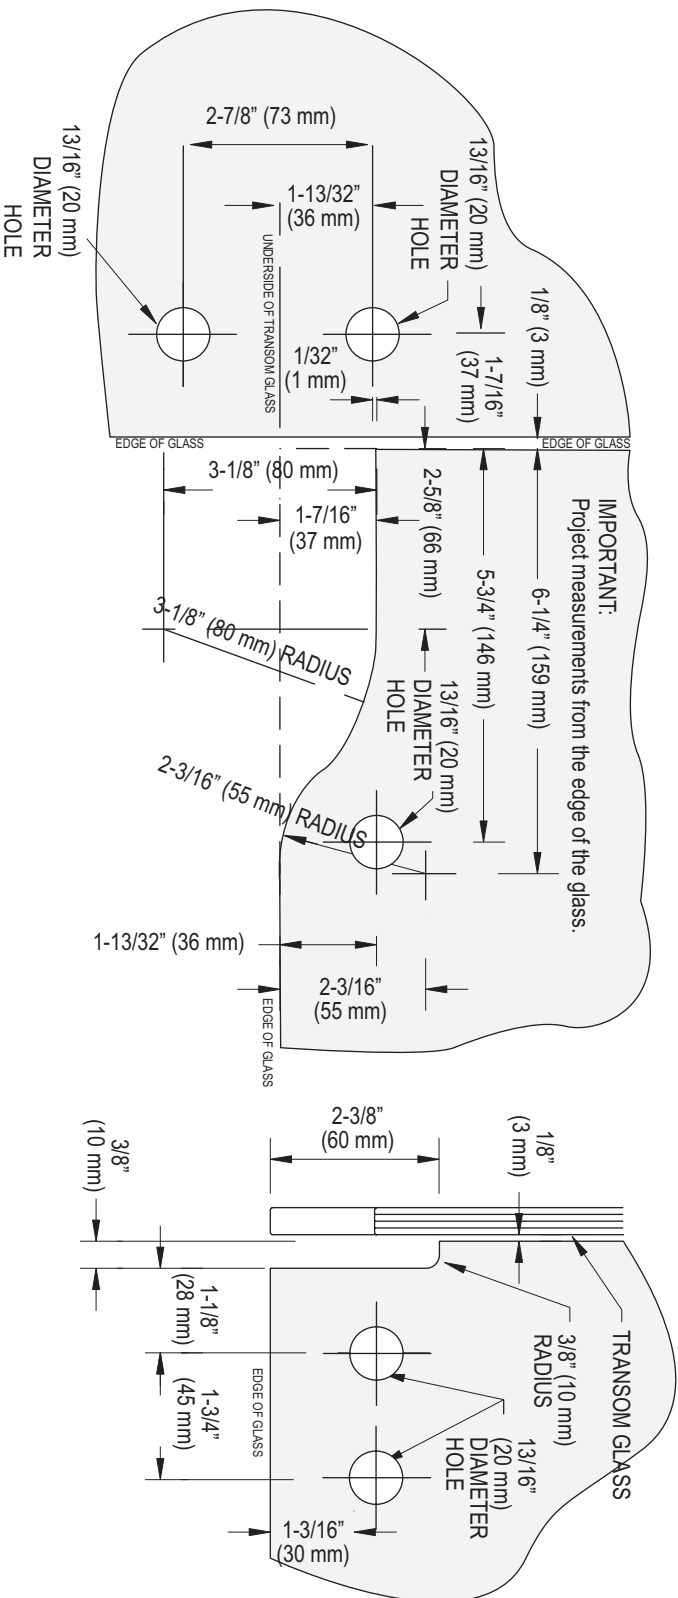

# CRL CURVED FACE PLATE SIDELITE MOUNTED TRANSOM PATCH WITH SUPPORT FIN BRACKET

TYPICAL 2-11/16" (68 mm) SET BACK

INCLUDES: BASE FITTING, INSERT, AND COVER PLATES

**Cat. No. CPF41R**

**Cat. No. CPF41L**

TEMPLATE CAN BE REVERSED TO ACCOMMODATE RIGHT OR LEFT HAND INSTALLATION

