


GLASS FABRICATION TEMPLATE FOR THE Z-SERIES SQUARE TYPE RADIUS BASE CLAMPS FOR 1/2" (12 mm) & 9/16 (13.52mm) GLASS

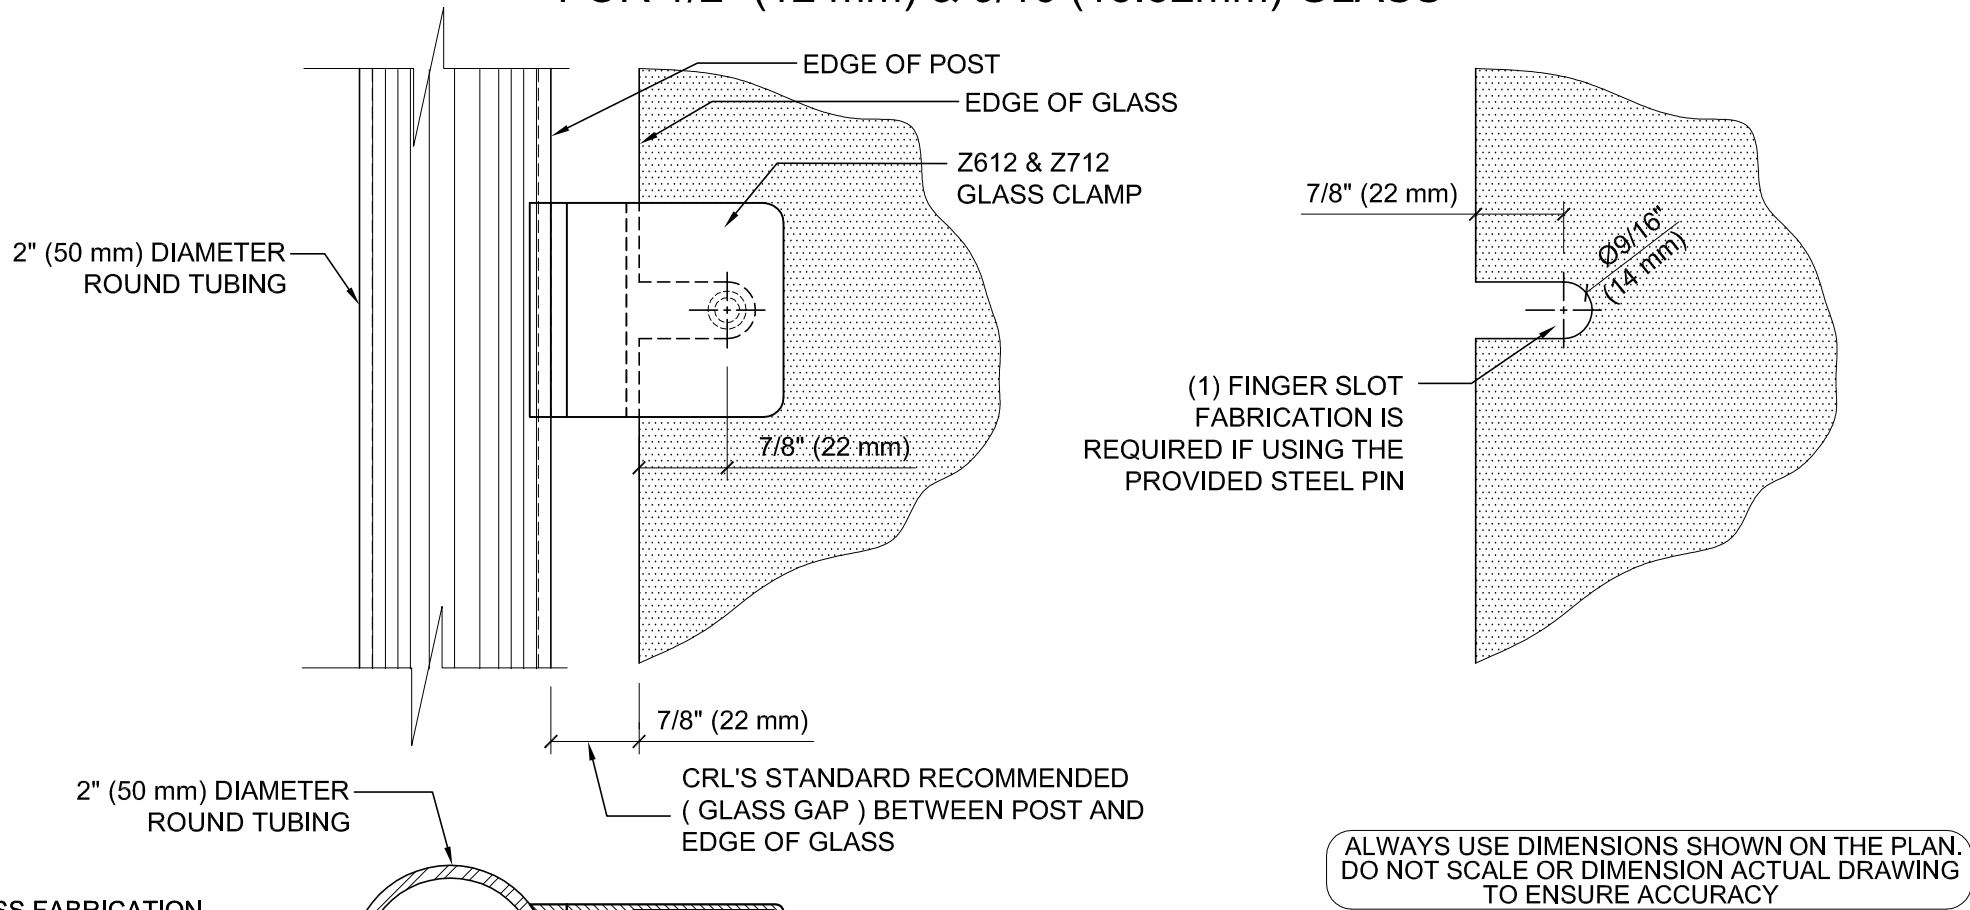

ALWAYS USE DIMENSIONS SHOWN ON THE PLAN.
DO NOT SCALE OR DIMENSION ACTUAL DRAWING
TO ENSURE ACCURACY

**GLASS FABRICATION
TEMPLATE USED FOR:**

CATALOG NUMBER	TUBE DIA
Z612BR	2" (50.8 mm)
Z612CH	2" (50.8 mm)
Z612SC	2" (50.8 mm)
Z612BN	2" (50.8 mm)
Z612GP	2" (50.8 mm)
Z612W	2" (50.8 mm)
Z712BS	2" (50.8 mm)
Z712PS	2" (50.8 mm)
ZP712BS	2" (50.8 mm)
ZP712PS	2" (50.8 mm)

SPECIFICATIONS:

GLASS THICKNESS: MODELS FOR 1/2" (12 mm) GLASS.
BASE DESIGN: RADIUS BACK
FOR USE WITH: 2" (50.8 mm) DIAMETER ROUND TUBING ONLY.
MATERIAL: CHOICE OF ZINC CONSTRUCTED OR STAINLESS STEEL. STAINLESS STEEL OR POWDER PAINTED ZINC CLAMPS ARE RECOMMENDED FOR MORE DURABILITY IN EXTERIOR APPLICATIONS.
GLASS FABRICATION: FOR 1/2" (12 mm) THICK GLASS. 9/16" (14mm)
 FINGER SLOT REQUIRED IF USING PROVIDED STEEL PIN FOR GLASS SUPPORT
INCLUDES: RUBBER GASKETS AND STEEL PIN (FOR OPTIONAL USE) WITH GROMMET.