

# CRL PANIC AND DEADBOLT HANDLE

## Quote/Order Form (100 and 110 Series)

Fax Completed Form  
to (800) 587-7501

Date: \_\_\_\_ / \_\_\_\_ / \_\_\_\_

Firm Name: \_\_\_\_\_ P.O. # (if Ordering): \_\_\_\_\_

Phone #: \_\_\_\_\_ City and State \_\_\_\_\_

Project Name: \_\_\_\_\_

Architect: Name, City and State: \_\_\_\_\_

Quantity: \_\_\_\_\_ Door Mark: \_\_\_\_\_

Panic Housing: PA100 Series  PA110 Series  Exterior Handle: A  B  C  D  E

Deadbolt Housing: DB100 Series  DB110 Series  F  G  H  J  J-S

Dummy Housing: DH100 Series  DH110 Series  K  K-S  L  L-S  M

M-S  N  P

X  Y  Z

(None)

Swing Pair(s): \_\_\_\_\_ Swing: 3&4 / Single(s): \_\_\_\_\_ Swing: \_\_\_\_\_

Keying: With Exterior Key Cylinder  Keyed Alike

No Exterior Key Cylinder  Other: \_\_\_\_\_


### CRITICAL INFORMATION (PA/DB100 Series Only)

Jamb Condition: Sidelites  Frame  Width: \_\_\_\_\_

Wall  (Pivot Distance Must be Increased to 3-1/2")

Header Size: \_\_\_\_\_ Recommended Width is 6"

### Door Swing Diagram

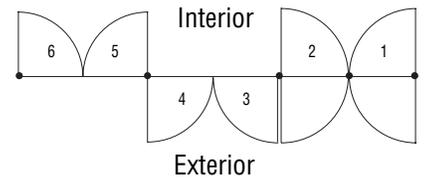

Electric Strike: Yes  Folger Adam 310-1 with 3/4" Straight Keeper (FA3101-24VDC)

(PA/DB100 Series Only) No  Without Signal Switch-Furnished by CRL





Sill Condition:  Floor Mounted Ramp Strike

(PA110 Series Only)  Threshold Ramp Strike (Minimum is 1/2" x 7")

Rail Description: Clad  Non-Clad  Size or Number: \_\_\_\_\_

### Door Type:

Check One



Stile  
 Medium  
 Wide

Metal or Wood  
\_\_\_\_"  
Thick

Glass Thickness: 1/2" (12 mm)  3/4" (19 mm)

Actual Door Size: \_\_\_\_\_ Horizontal Centers: \_\_\_\_\_ (CRL Will Calculate)

Crash Bar Height Above Bottom of Door: 42"  Other  Specify: \_\_\_\_\_

Finish:  Stainless Steel: #4 Satin  #8 Polished

Brass: #4 Satin  #8 Polished

Custom Specify: \_\_\_\_\_


Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. Phone us at (800) 421-6144 U.S. , or (877) 421-6144 Canada, Extension 7700. You may also fax to (800) 587-7501, or e-mail [techsales@crlaurence.com](mailto:techsales@crlaurence.com)

# CRL INTERIOR DOOR HANDLES

## CRL Panic Handles

- For 1/2" (12 mm) or 3/4" (19 mm) Tempered Glass
- Can Be Used as Replacement for Older Panics
- Custom Sizes of Stock Finishes Ship Within Three to Five Business Days
- Optional Keyed Access
- Optional Electric Strike
- Optional Exterior Fixed Handles
- Available in Polished or Brushed Stainless Steel, Polished or Satin Brass, and Oil Rubbed Bronze


### Operating Handles on Interior Side of Door

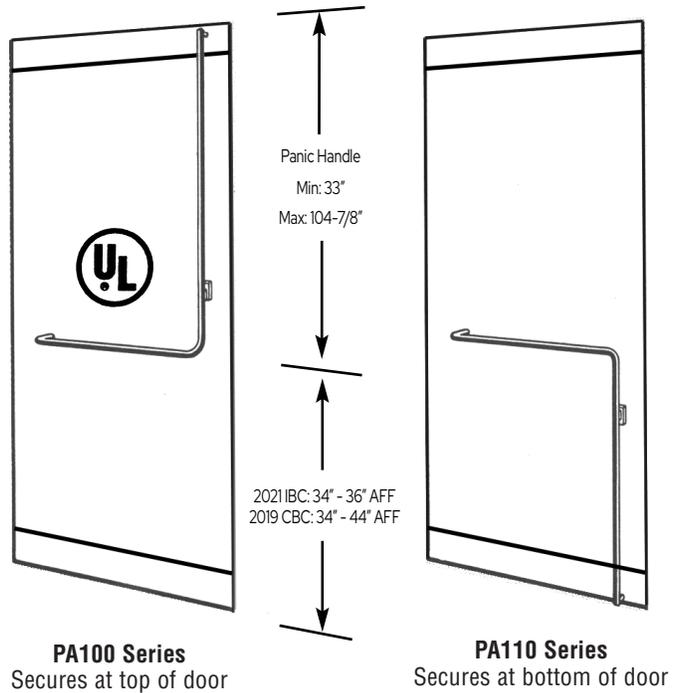

## CRL Deadbolt Handles

- For 1/2" (12 mm) or 3/4" (19 mm) Tempered Glass
- Can Be Used as Replacement for Older Deadbolts
- Custom Sizes of Stock Finishes Ship Within Three to Five Business Days
- Optional Keyed Access
- Optional Electric Strike
- Optional Exterior Fixed Handles
- Available in Polished or Brushed Stainless Steel, Polished or Satin Brass, and Oil Rubbed Bronze

### With Locking Mechanism on Interior Side of Door

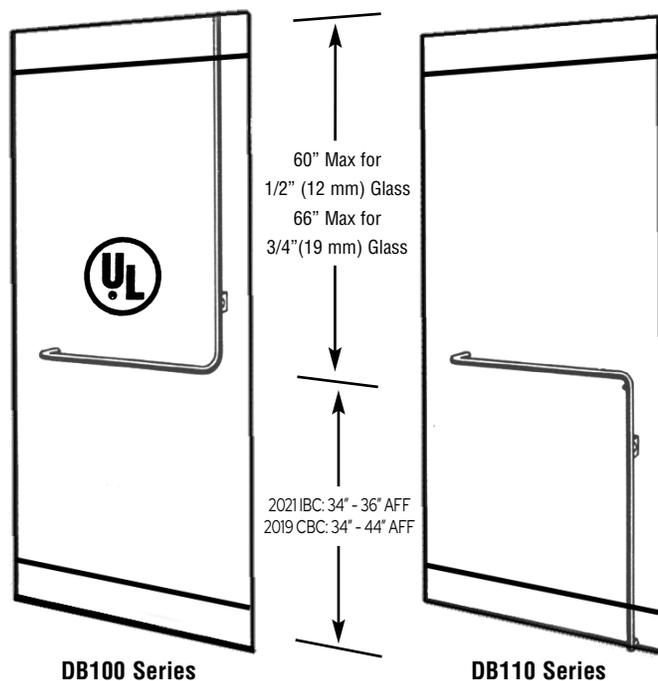

Certification: ANSI/BHMA A156.16 Grade 1

Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. Phone us at (800) 421-6144 U.S. , or (877) 421-6144 Canada, Extension 7700. You may also fax to (800) 587-7501, or e-mail [techsales@crlaurence.com](mailto:techsales@crlaurence.com)

# CRL EXTERIOR PUSH/PULL HANDLE COMBINATIONS FOR PANIC AND DEADBOLT HANDLES

## Exterior Fixed Pull Handles



**NOTE: Any Exterior Fixed Pull Handle on this page can be used in combination with any Panic Device or Deadbolt Handle shown on page 2**

Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. Phone us at (800) 421-6144 U.S. , or (877) 421-6144 Canada, Extension 7700. You may also fax to (800) 587-7501, or e-mail [techsales@crlaurence.com](mailto:techsales@crlaurence.com)

# CRL SUGGESTED GUIDELINES

## CRL Recommends that Door Height be Limited to:

### 1/2" (12 mm) Glass:

Exterior Openings: 8'-0" (2.44 m)

Interior Openings: 8'-6" (2.59 m)

### 3/4" (19 mm) Glass:

Exterior Openings: 8'-6" (2.59 m)

Interior Opening: 9'-0" (2.74 m)


**NOTE:** If doors exceeding these recommendations are required, the designer should take into account the following factors:

- Volume of Daily Usage (Number of Anticipated Cycles)
- Deflection of Door Due to Wind and/or Stack Load Pressures
- Stability of Door Under Operation (How Much the Door Flexes When Pushed)

For assistance in design applications, please contact CRL Technical Sales

## CRL STOREFRONTS ONLINE DESIGN AND GLASS SIZE PROGRAM

- An Innovative Web-Based Program that Generates Glass Sizes from Measurements You Take in the Field
- Access 24/7 at [www.crlaurence.com](http://www.crlaurence.com)
- Frameless Storefront Designs Have Never Been So Easy
- Simply Push the Print Icon Upon Completion of Data Entry to Generate Complete Glass Sizes
- Built-In Safety Features Ensure CRL Approves of Design and Specifications

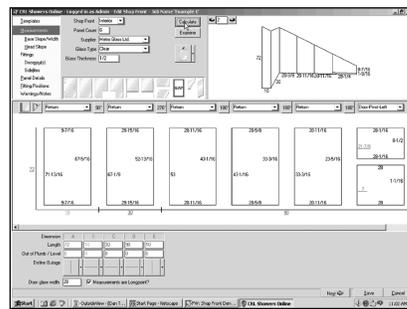

**CALL FOR DETAILS!  
Ask for Extension 7706**

Please Contact CRL Technical Sales for specification details on ordering these new handles for All Glass Entrance Doors. Phone us at (800) 421-6144 U.S. , or (877) 421-6144 Canada, Extension 7700. You may also fax to (800) 587-7501, or e-mail [techsales@crlaurence.com](mailto:techsales@crlaurence.com)