



EXPOSED S.



ACTUAL SIZE

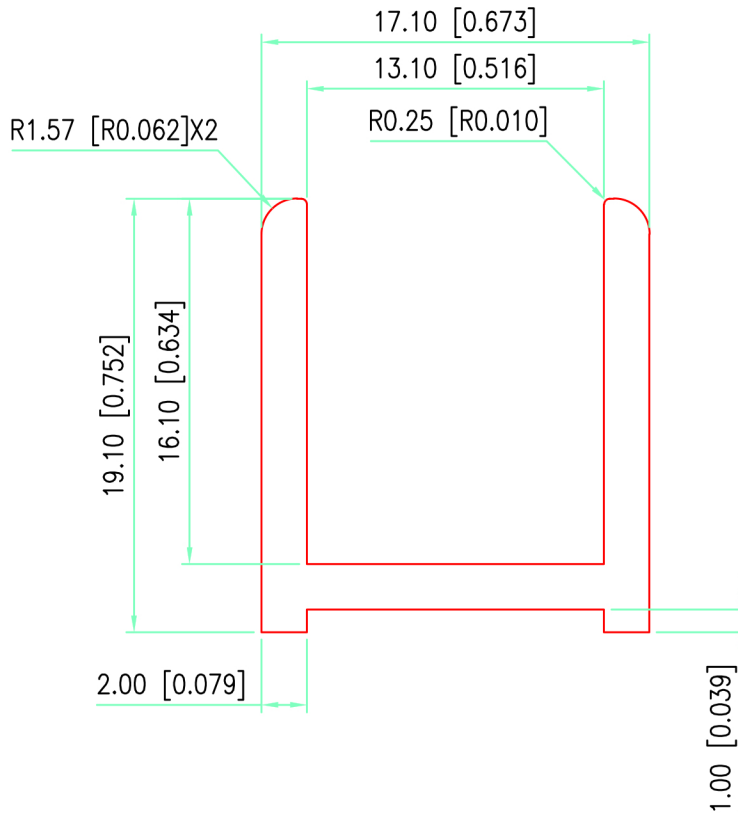

RANGE	TOLERANCE
0 - 3	±0.15
3 - 6	±0.18
6 - 12	±0.20
12 - 19	±0.23
19 - 25	±0.25
25 - 38	±0.30
38 - 50	±0.35
50 - 100	±0.61
100 - 150	±0.86
150 - 200	±1.12

REMARKS :
CRITICAL DIMENSION
* DENOTE IMPORTANT DIMENSION
----- INDICATES EXPOSED SURFACE
- - - - - INDICATES PAINT SURFACE
DIMENSION ARE MILIMETER AND INCH
UNSPEC. CORNERS RADIUS MAX. 0.00[0.000]mm
F = FULL RADIUS V = VEE GROOVE 0.00[0.000] X 00°
r = 0.00[0.000] R = 0.00[0.000] R1 = 0.00[0.000] R2 = 0.00[0.059]

UNSPEC WALL THICKNESS * 2.00 mm		* 0.079 inch		16-03-2021
CIRCUM DIA	: 25.00 mm	0.984 inch	FINISH : -	SCALE : 3 : 1
SECTION AREA	: 101.515 mm ²	0.157 inch ²	ALLOY : 6463-T5	
LINIER WEIGHT	: 0.275 kg/m	0.185 lb/ft	RATIO : 62	
PERIMETER	: 105.038 mm	4.135 inch	MACHINE : 1100 2HOLE	AUHP12
EXPOSED SURFACE	: 85.938 mm	3.383 inch	MATING WITH SECTION :	Flatness SL 0.10 HL 0.15 mm/25 mm
Straightness up to 100 1mm/1m ; over100 1.5mm/1m			Twist 0.5°/300 mm ; 0.8°x total length (m) ; 3° max	