

## Glass Mounted Hand Rail Quote/Order Request Form

Date \_\_\_\_\_

Name \_\_\_\_\_  
 Email \_\_\_\_\_  
 Phone Number \_\_\_\_\_

Company \_\_\_\_\_  
 Account Number \_\_\_\_\_  
 Job Name \_\_\_\_\_

Utilize this form to assist you in covering the details required to quote a HRS Hand Railing System. Going through this exercise should prevent you from overlooking any details related to your installation.

**IMPORTANT:** Depending on the complexity of your project, one or more of the following may be required to accurately order: sketches or drawings of your particular application with dimensions; printed architectural drawings or CAD files; photos of the job site conditions (digital images are preferable).

**NOTE:** Please download and submit completed form to [railings.archmetals@crlaurence.com](mailto:railings.archmetals@crlaurence.com). A final sign off is required prior to any custom fabrication.

### OPTIONAL HAND RAIL

- 1-1/2" Diameter .050" Wall Thickness
- 1.66" O.D. 1-1/4" Schedule 40 .140" Wall Thickness
- 1.9" O.D. 1-1/2" Schedule 40 .145" Wall Thickness
- 2" Diameter .050" Wall Thickness
- Other (Specify) \_\_\_\_\_
- None Required

### HAND RAIL END CAPS


- Standard Applied Flat End Caps
- Standard Applied Dome End Caps
- Stabilizing Wall Mount Flat End Caps
- Welded Flat End Caps
- Custom Angle End Caps (Specify) \_\_\_\_\_

### FINISH

- Duranodic Bronze
- Brushed Stainless Steel
- Polished Stainless Steel
- Satin Brass
- Polished Brass
- Satin Anodized
- Powder Coated Aluminum
- Mill Finish
- Custom (Specify) \_\_\_\_\_

### OPTIONAL HAND RAIL GLASS BRACKETS

- Standard Glass Mounted Hand Rail Brackets
- 2-Way Adjustable Glass Mounted Hand Rail Brackets
- 3-Way Adjustable Glass Mounted Hand Rail Brackets

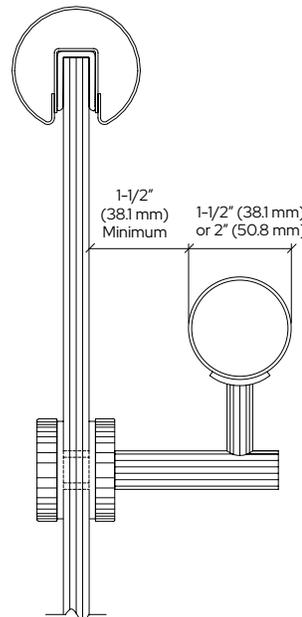


The hand grip portion of the Hand Rails shall not be less than 1-1/4" (31.7 mm), and no more than 2" (50.8 mm) in cross sectional dimension.

**NOTE:** Codes vary from region to region. Review local building codes for handrail code requirements before ordering.

Top of Hand Rail shall not be placed less than 34" (863 mm), nor more than 38" (965 mm), above landings, ramps or the toe of step.

### LAYOUT GRID TO SKETCH DESIGN

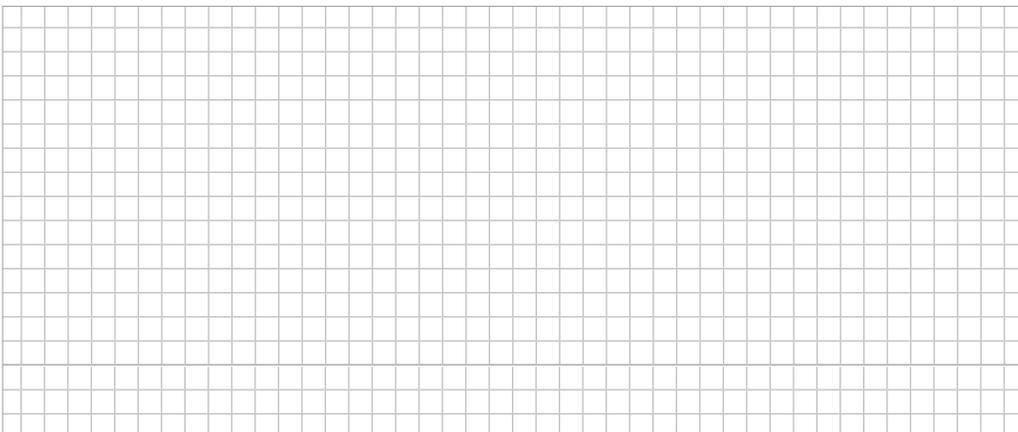

### NOTES

RESET BUTTON

Please submit to: [railings.archmetals@crlaurence.com](mailto:railings.archmetals@crlaurence.com)

