
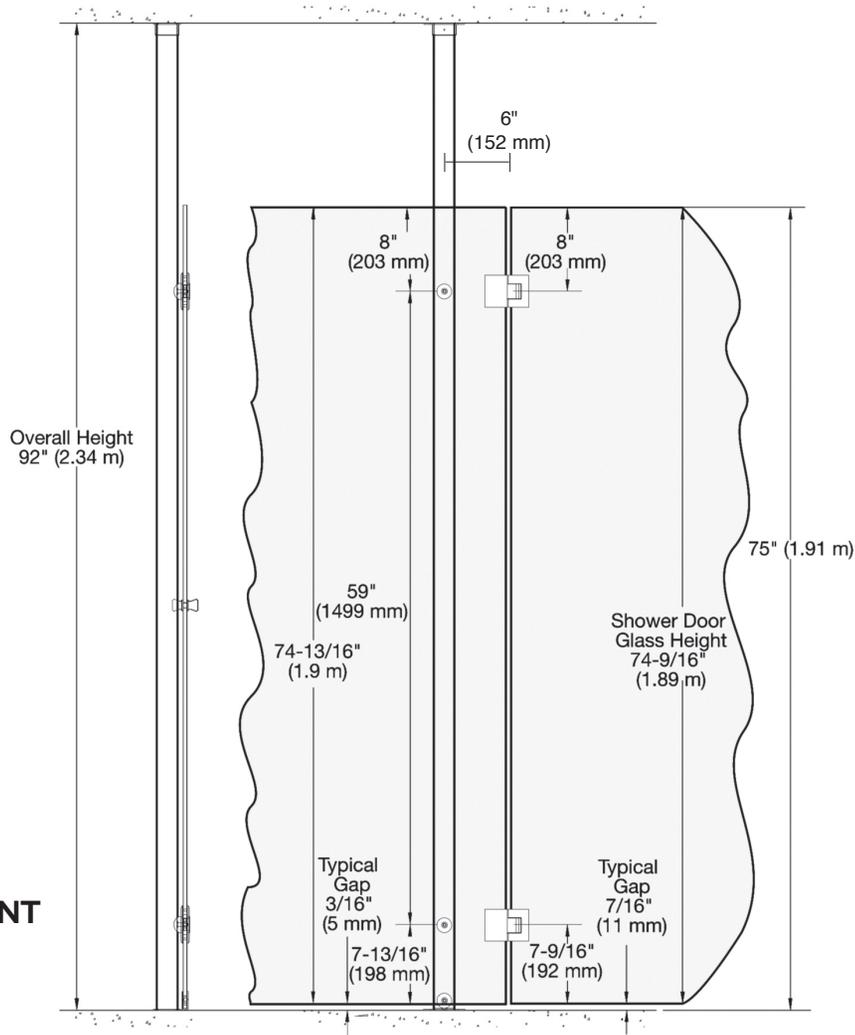


## TYPICAL INSTALLATION

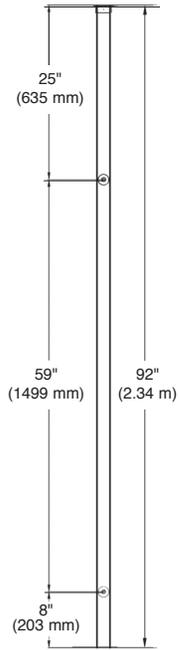

### FLOOR-TO-CEILING MOUNT

Glass Fabrication  
CAT. NO. VPK92

### Specifications:

Material: Stainless Steel or Brass Tubing  
Glass Thickness Range: 5/16" (8mm) to 1/2" (12mm)  
Hole Size Required: 3/4" (19mm)

The VPK92 requires (2) 3/4" (19 mm) holes in the fixed glass. The bottom stand-off is 8" (203 mm) from the floor when the post is fastened. If a fixed panel were mounted to the floor in U-channel and a 3/16" (5 mm) deduction were made to allow for the channel, the first hole in the glass (from the bottom up) would be located at 7-13/16" (198 mm). This dimension is from the bottom of the glass to the center of the 3/4" (19 mm) diameter hole. The holes must be 59" (305 mm) from center-to-center. The recommended distance in from the vertical edge of the glass is 6" (152 mm).

### Kit Contents:

- 1 Each - 92" (2.34 m) length of 2" (51 mm) diameter Round Tubing with welded Bottom Flange and two Rivet Nuts
- 2 Each - Tube Adapters with 1-1/2" (38 mm) diameter End Caps (with Threaded Stud)
- 1 Each - Removable Top Flange with Set Screw

**\*NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.