

COMPANY NAME _____ PHONE _____
CONTACT _____ ACCOUNT NO. _____ FAX _____
JOB NAME _____ EMAIL _____

☐ QUOTE ☐ ORDER P.O. # _____ DATE _____

| SERIES | STANDARD PROFILE DIMENSIONS | | | |
|---|-----------------------------|------------------|----------------------|-----------------------|
| | THICKNESS | STILE | TOP RAIL | BOTTOM RAIL |
| 250T NARROW STILE THERMAL DOOR | 1-3/4" | 3" | 2-7/8" | 4-5/16" |
| 250AT NARROW STILE ADVANCE THERMAL DOOR | 1-3/4" | 3" (Foam Filled) | 2-7/8" (Foam Filled) | 4-5/16" (Foam Filled) |
| OPTIONAL | | | | 10" |

APPLICATION : LIGHT TO MODERATE TRAFFIC

DOOR STILE

- ☐ 250T Narrow Stile Thermal Door
☐ 250AT Narrow Stile Advance Thermal Door

DOOR FINISH

- ☐ 11 - Clear Anodized Class I - Standard
☐ 22 - Dark Bronze / Black Anodized Class I
☐ 52 - Bone White 70% KYNAR® (2-Coat)
☐ 71 - Standard 70% KYNAR® (2-Coat)
Standard Color per Chart- Specify _____
☐ 71 - Custom 70% KYNAR® (2-Coat) - Specify _____
☐ 71 - Custom 70%KYNAR®(3-Coat) - Specify _____

DOOR OPENING SIZE

- ☐ 36" x 84"
☐ Custom Single _____
Door Tag # _____
☐ 72" x 84"
☐ Custom Pair _____
Door Tag # _____
Maximum Leaf Size 48" x 96"

GLASS STOP

1" (25 mm) Square Glass Stops

TOP RAIL - INCLUDES GLASS STOP

- ☐ 2-7/8" HT201 (Standard)
☐ 4-5/16" HT101
☐ 6" WT201

BOTTOM RAIL - INCLUDES GLASS STOP

- ☐ 4-5/16" HT101 (Standard)
☐ 6" WT201
☐ 7-1/4" JT650
☐ 10" WT196

MUNTINS - INCLUDES GLASS STOP

- ☐ 3-5/8" (HT202)
☐ 5-1/16" (MT101)
☐ 6-3/4" (MT201)
☐ 8" (JT650)
☐ 10-3/4" (MT196)


DOOR SWING

- | | QTY |
|--|-----------|
| <input type="checkbox"/> LHR Hinge Left Swing Out | _____ ea. |
| <input type="checkbox"/> RHR Hinge Right Swing Out | _____ ea. |
| <input type="checkbox"/> LH Hinge Left Swing In | _____ ea. |
| <input type="checkbox"/> RH Hinge Right Swing In | _____ ea. |
| <input type="checkbox"/> PAIR Swing In | _____ ea. |
| <input type="checkbox"/> PAIR Swing Out | _____ ea. |

DOOR HINGING

- ☐ Top/Bottom and Intermediate Offset Pivots (OP500/DH010)
• Additional Pivot ☐ DH010
Add _____ per Door
☐ 1-1/2 Pair Butt Hinges (DH009)
☐ Additional Butt Hinge
Add _____ per Door
☐ Continuous Geared Hinge (DH492)
☐ By USALUM
☐ By Customer
☐ Prep and Supply
☐ Prep Only (Selection Above)
☐ No Prep

DOOR SWING CHART

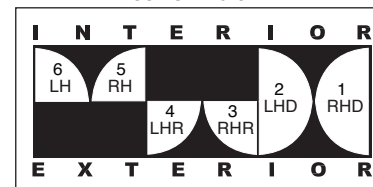

Use the Door Swing Chart to determine how the door(s) should be handed.

LOCKING OPTIONS

- ☐ MS Hookbolt With Two Cylinders - STD
☐ Long Throw Deadlock With Cylinders
☐ 3-Point Locking @ Pair With Cylinders
☐ Latch/Deadlock (DH189) With Cylinders
☐ Thumbturn in Lieu of Cylinder
☐ Latchlock (DH002)
☐ Cylinder (Ext.) ☐ Cylinder (Int.)
☐ Thumbturn (Int.)
☐ Lock Indicator
☐ Cylinder Guard
☐ Flushbolts (DH008)
☐ Paddle Handle
• DH569 Lever Handle
☐ Interior ☐ Back to Back
• CRL DL2150 Lever Handle
☐ Interior ☐ Back to Back
☐ Electric Strike
☐ Custom ☐ By USALUM ☐ By Customer
☐ Prep and Supply ☐ Prep Only
NOTE: Prep Only Requires Manufacturer's Name , Model, and Template
Manufacturer: _____
Model: _____

PUSH/PULL HARDWARE

- ☐ Standard Push/Pull
☐ Offset Pulls
☐ None _____
☐ Custom ☐ By USALUM ☐ By Customer
☐ Prep and Supply ☐ Prep Only
NOTE: Prep Only Requires Manufacturer's Name, Model, and Template
Manufacturer: _____
Model: _____

FOR OFFICE USE ONLY

TAKEN BY: _____
PRICED BY: _____
EDITED BY: _____

PANIC DEVICES

- ☐ Jackson 1295 Rim Panic Device
- ☐ Jackson 2095 Rim Panic Device
- ☐ Jackson 1095 Rim Panic Device
- ☐ Adams-Rite 8400 Mortise Panic Device
- ☐ Adams-Rite 8800 Rim Panic Device
 - ☐ Exit Only
- ☐ By USALUM
- ☐ By Customer
- ☐ Prep and Supply
- ☐ Prep Only (Selection Above)

DOOR SWEEP

- ☐ Yes ☐ No
- ☐ Exposed Fasteners
- ☐ Concealed Fasteners

HARDWARE FINISH

- Clear
- Bronze
- ☐ Specify

DOOR FINISH

11, 12, 52, 71
22

DOOR CLOSER

- ☐ O.H. Concealed (Offset-Prep Only)
 - Excluding HT201 Top Rail
- ☐ Standard Jackson Closer (Supply)
 - Excluding HT201 Top Rail
- ☐ 90° ☐ 105° Hold Open ☐ Yes ☐ No
- ☐ CRL Surface Mount Closer (Supply)
- ☐ Drop Plate
- ☐ Door Stop/Holder Degree _____
- ☐ No Closer Required
- ☐ Custom ☐ By USALUM ☐ By Customer
- ☐ Prep and Supply ☐ Prep Only

NOTE: Prep Only Requires Manufacturer's Name,
Model, Template, and Confirm Capability.

Manufacturer: _____
Model: _____

FRAME SYSTEM

Series IT451 2" x 4-1/2" ☐ Open Back
Subframe ☐ 1" x 4-1/2" (Thermal) Tubular Only

FRAME TYPE

- ☐ Up and Over (No Transom)
- ☐ 126" (3.2 m) High With Transom
- ☐ Frame Only
- ☐ Door Only (No Frame)
- ☐ Custom

CLEARANCES/THRESHOLD

Clearance from Bottom of Door to Finish Floor

- ☐ 11/16" Standard
- ☐ Custom Clearance

Specify _____

- TT245 1/2" Threshold

ADDITIONAL NOTES OR SKETCHES

FOR OFFICE USE ONLY

TAKEN BY: _____

PRICED BY: _____

EDITED BY: _____

APPROVED BY _____

DATE _____

NOTE: PLEASE DOWNLOAD FORM TO SUBMIT. DO NOT FILL FORM ONLINE.
Email completed form to us_alum@usalum.com.
Fax checklist to U.S. Aluminum Technical Sales at (877) 883-7547
To review call (800) 627-6440. This form is available online at usalum.com.