


GLASS CLAMPS

Oversized 90° Glass Clamp
(Wall-to-Glass Application)

CAT. NO. GCB91

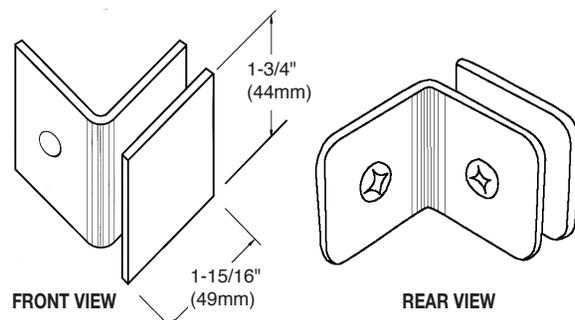

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

NOTE: The Clamps shown on this page can also be used in a glass-to-glass application. For information on this see pages 4T-9 and 4T-10.

Specifications:


Material:	Solid brass
Glass Thickness Range:	5/16" (8mm) to 1/2" (12mm)
Hole Size Required:	5/8" (16mm) or 3/4" (19mm)
Includes:	Mounting screws and gaskets
Note:	Additional set of gaskets is required for 5/16" (8mm)

Template Shown on Next Page


***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

NOTE: The Clamps shown on this page can also be used in a glass-to-glass application. For information on this see pages 4T-9 and 4T-10.

TYPICAL INSTALLATION

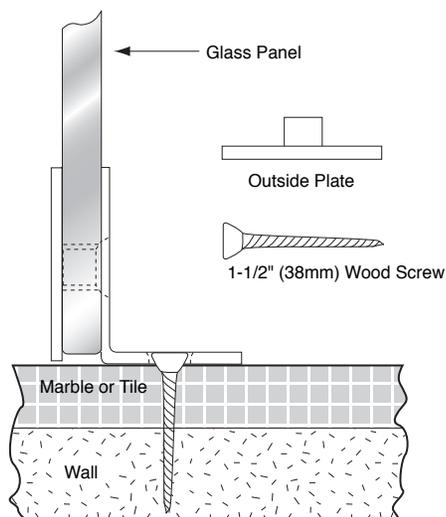

TEMPLATE

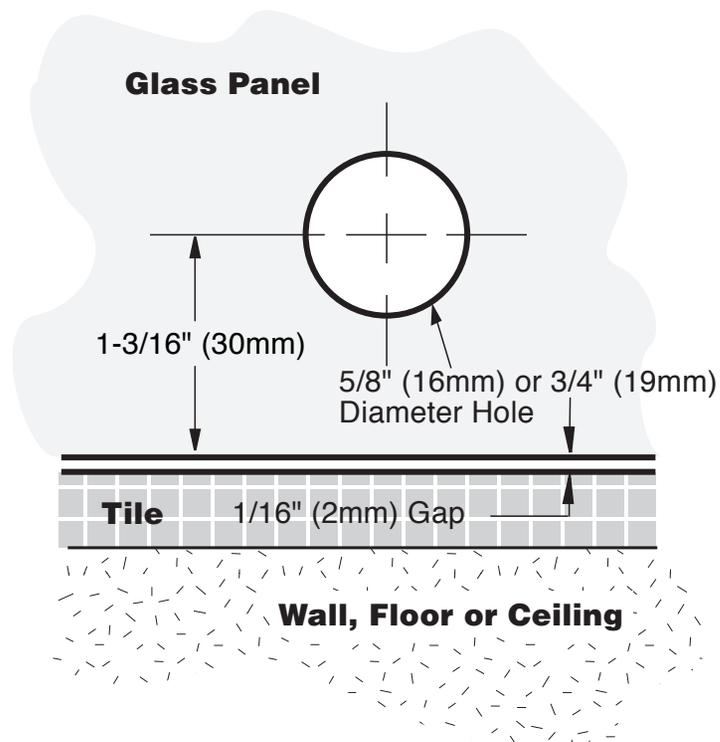

ALWAYS USE DIMENSIONS
TO ENSURE ACCURACY

GLASS CLAMPS (Wall-to-Glass Application)

THE TEMPLATE ON THIS PAGE APPLIES TO THE FOLLOWING CLAMPS:

Oversized 90° Glass Clamp

CAT. NO. GCB91