




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

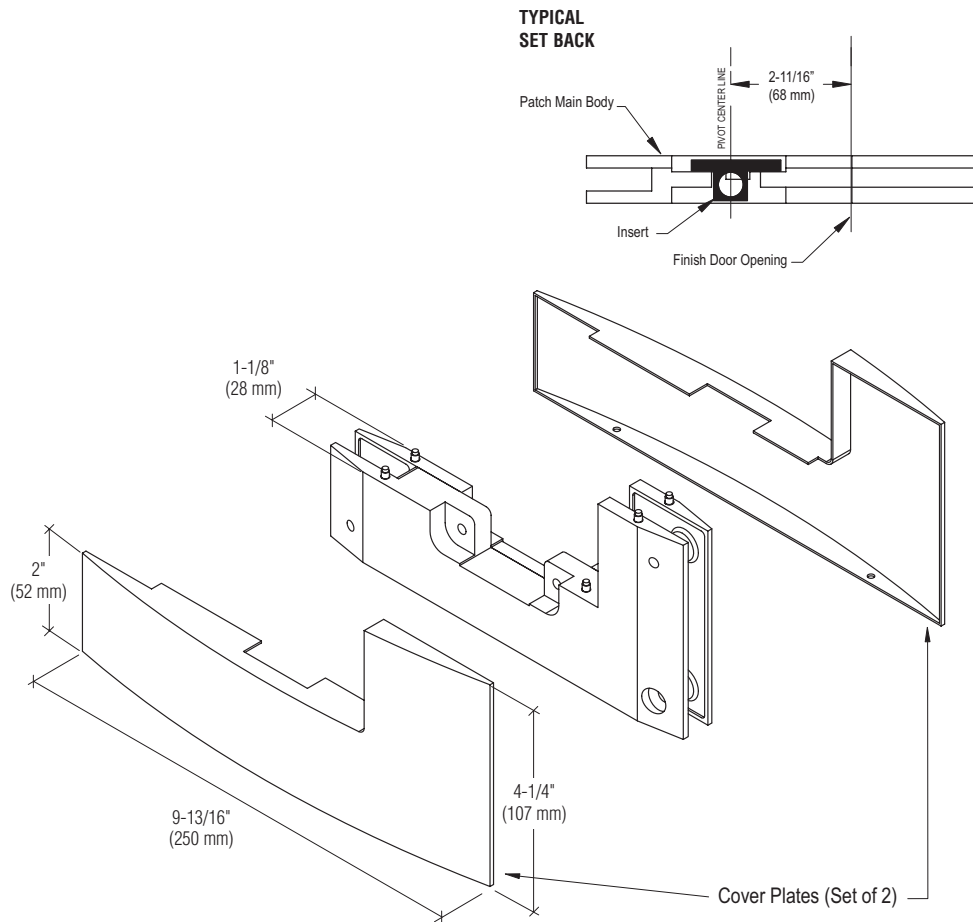

CRL CURVED FACE PLATE TRANSOM/SIDELITE PIVOT PATCH

TYPICAL 2-11/16" (68 mm) SET BACK

INCLUDES: INSERT, COVER PLATES

Cat. No. CPF40

Important Information:

The CPF40 Sidelite Mount Transom Patch is designed for 2-11/16" (68 mm) set back. This dimension is measured from the "finished" door opening to the pivot center line.

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm)
thick tempered safety glass

Construction: High density casting

Glass Fabrication Required: Cut-Out and
Hole Required - See Reverse

Includes: Base Fittings, Insert Cover Plates,
Screws, and Gaskets for 3/8" (10 mm) and 1/2" (12 mm) Glass

Available Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel

Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side

For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:



For public safety, we recommend the use of tempered safety glass only.

SEE TEMPLATE ON BACK

Refer to Dimensions Shown to Ensure Accuracy



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

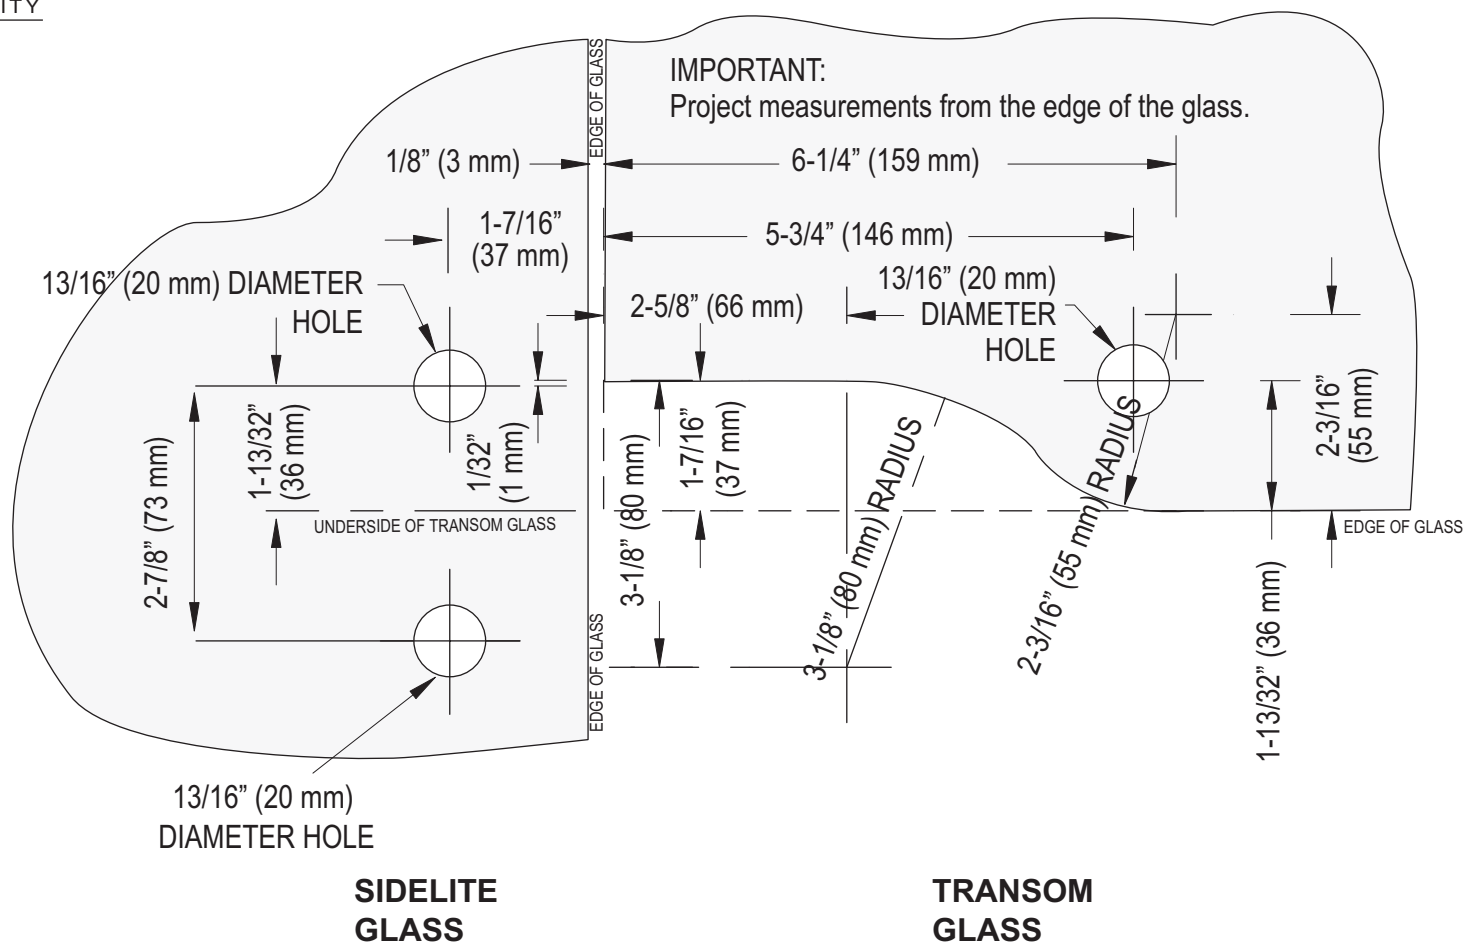

CRL CURVED FACE PLATE TRANSOM/SIDELITE PIVOT PATCH

TYPICAL 2-11/16" (68 mm) SET BACK

INCLUDES: BASE FITTING, INSERT, AND COVER PLATES

Cat. No. CPF40

