
HORIZONTAL SLIDING SERVICE WINDOW SW1600 NO SCREEN

SECURITY OPTIONS: *SPECIFY SLIDE LOCK OR PIN LOCK* SLIDE LOCK IS IN HEADER WHEN FULL **BOTTOM TRACK IS USED**

SW WINDOWS OVER 36" HIGH WITH 1/4" GLAZING REQUIRE A FULL BOTTOM TRACK WITH SUPPORTING WHEELS.

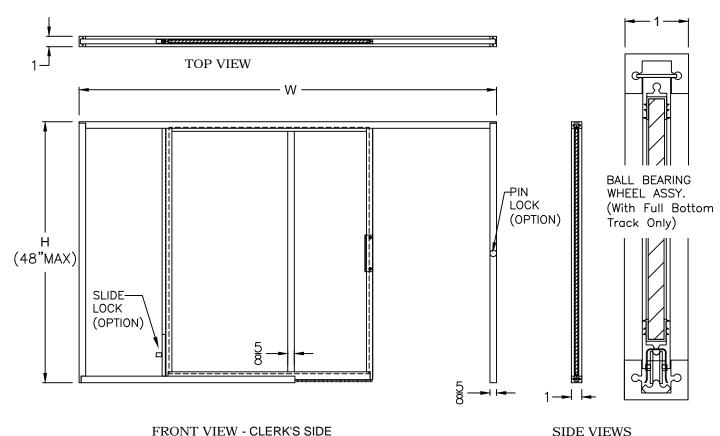

FRONT VIEW - CLERK'S SIDE

HALF TRACK SHOWN, ALSO AVAILABLE WITH FULL BOTTOM TRACK

SPECIFICATIONS:


- >Low to moderate usage (50 openings or less per day)
- >Overhang recomended for exterior use.
- >Materials: Extruded aluminum 6063-T6 Frame.
- >Glazing: $\frac{1}{8}$ " (3mm) or $\frac{1}{4}$ " (6mm) tempered glass.
- >Vinyl supplied on all models.
- >Side-By-Side Installation requires a vertical mullion supplied by others to separate windows.


TRANSACTION HARDWARE

C.R. Laurence Architectural Products

Phone Orders (800) 421-6144 Fax Orders (800) 458-7496 WWW.CRLAURENCE.COM Patent Pending

INSTRUCTIONS INCLUDED





SPECIFY RIGHT OR LEFT HAND SLIDING PANEL X = SLIDING PANEL