




C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

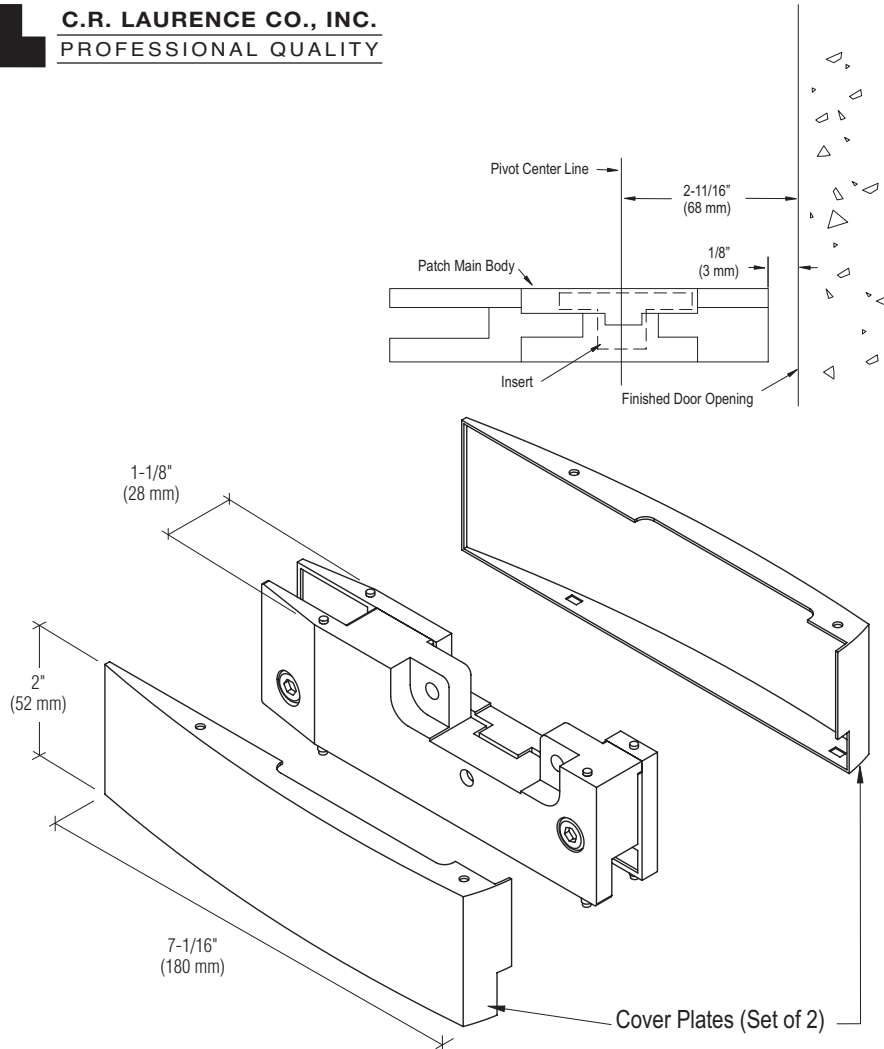

Important Information:

The CRL Curved Door Patch is designed for a 2-11/16" (68 mm) set back. This dimension is measured from the "finished" door opening to the pivot center line.

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm) thick tempered safety glass

Construction: High density casting

Glass Fabrication Required: Cut-Out and Hole Required
- See Reverse

Includes: Base Fitting, Appropriate Insert, Cover Plate, Screws, and Gaskets for 3/8" (10 mm) and 1/2" (12 mm) Glass

Available Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel

Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side

For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:

For public safety, we recommend the use of tempered safety glass only.

SEE TEMPLATE ON BACK

Refer to Dimensions Shown to Ensure Accuracy

CRL CURVED FACE PLATE DOOR PATCH

TYPICAL 2-11/16" (68 mm) SET BACK

DOOR TOP AND BOTTOM PATCH



Applicable to Cat. No. CPF20A, CPF20B, CPF10C

* Maximum Capacity	3/8" (10 mm) Glass		1/2" (12 mm) Glass	
	Weight	Door Width	Weight	Door Width
Top and Bottom Patches	176 lbs. (80 kg)	43-3/8" (1100 mm)	176 lbs. (80 kg)	43-3/8" (1100 mm)

NOTE:
Both weight and door width capabilities must be met when determining door size.



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

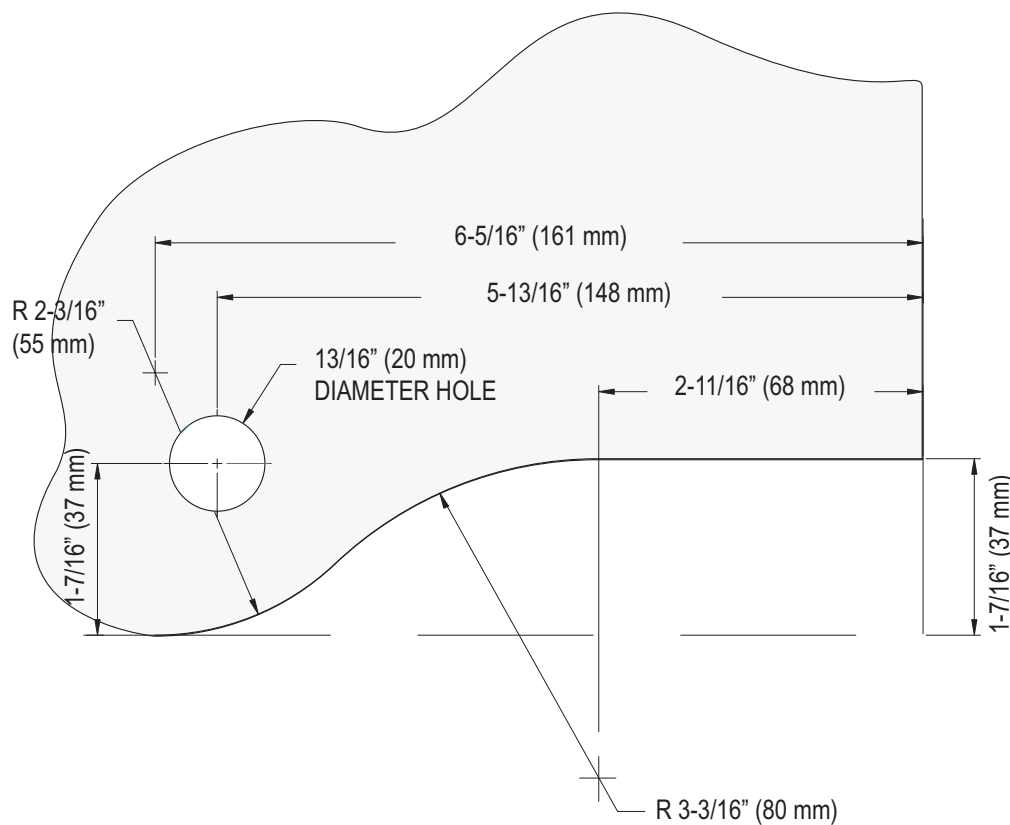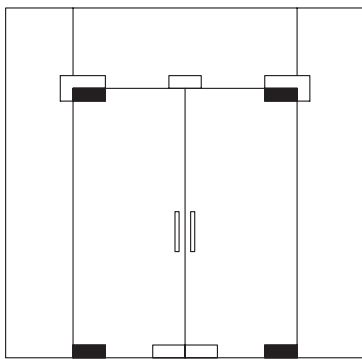

**DOOR
GLASS**

CRL CURVED FACE PLATE DOOR PATCH

TYPICAL $2\frac{11}{16}"$ (68 mm) SET BACK

DOOR TOP AND BOTTOM PATCH

Applicable to Cat. No. CPF20A, CPF20B, CPF10C

