

PETITE
Wall Mount Hinge – Flush Back Plate
CAT. NO. PET044

***NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

Specifications:

Glass Sizes: 1/4" (6mm) to 5/16" (8mm) thick tempered safety glass
 Construction: Solid brass
 Closing Type: Self-centering when within 15° of closed position
 Cutout Required
 Includes: Gaskets, screws and template

Maximum Door Capacities for Two Hinges or Three Hinges

| | | |
|----------------------|-----------------|-----------------|
| Maximum Door Weight: | 55 lbs. (25 kg) | 82 lbs. (37 kg) |
| Maximum Door Width: | 31" (787mm) | 34" (864mm) |

Use of Gaskets:

For 1/4" (6mm) Glass: Use one thick gasket on each side
 For 5/16" (8mm) Glass: Use one thin gasket on each side



Recommendations:

For public safety, we recommend the use of only tempered safety glass.
 Do not use power tools when installing these hinges.

Maintenance Guidelines:

- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean, warm water and dry.

IMPORTANT: Project measurements from the edge of the glass.

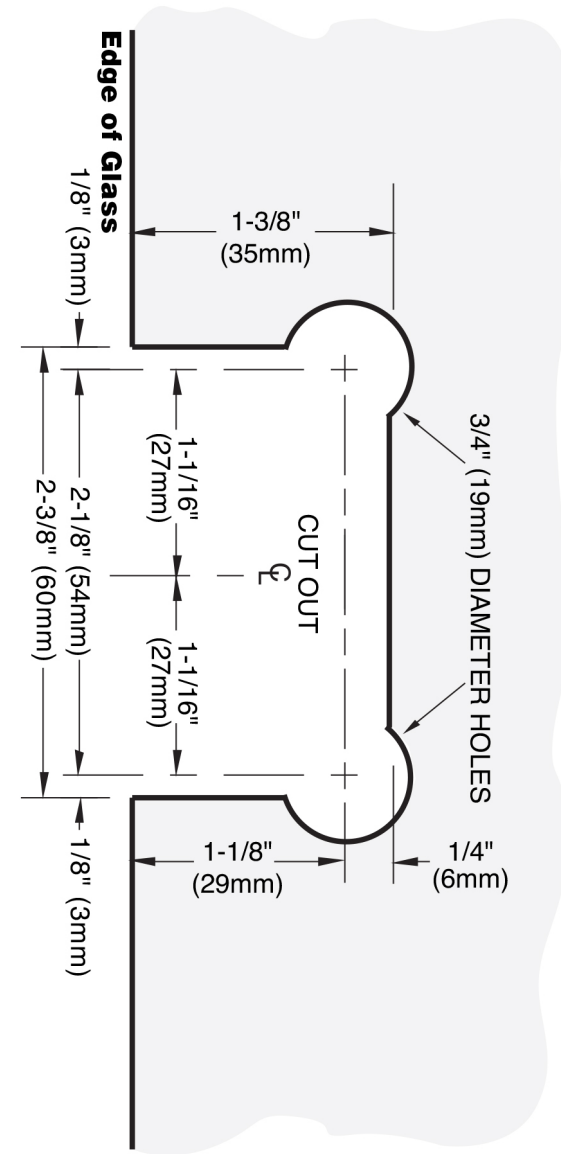

PETITE
 Wall Mount Hinge – Flush Back Plate
 CAT. NO. PET044