

INSTALLATION INSTRUCTIONS

GPTG3 THRU-GLASS GUNPORT



2503 E. Vernon Avenue, Los Angeles, CA 90058-1826
Phone: (800) 421-6144 Ext. 7760 Fax (800) 458-7496
crlaurence.com Email: transaction@crlaurence.com

SPECIFICATIONS

- Intended for Hand Gun Use
- Level 3 Protection
- Suitable for Interior or Exterior Applications
- Accommodates 1-7/8" To 2" (48 To 51 mm) Bullet Resistant Glazing Thicknesses
- Optional Spacer Rings are Available for Use With Glazing Materials From 1-3/16" to 1-7/8" (30 to 48 mm)


GLASS FABRICATION

One 6-1/2" (165 mm) diameter hole is required.

IMPORTANT: READ THIS MANUAL THOROUGHLY BEFORE BEGINNING INSTALLATION.


GETTING STARTED

Unpack and remove screws to disassemble.

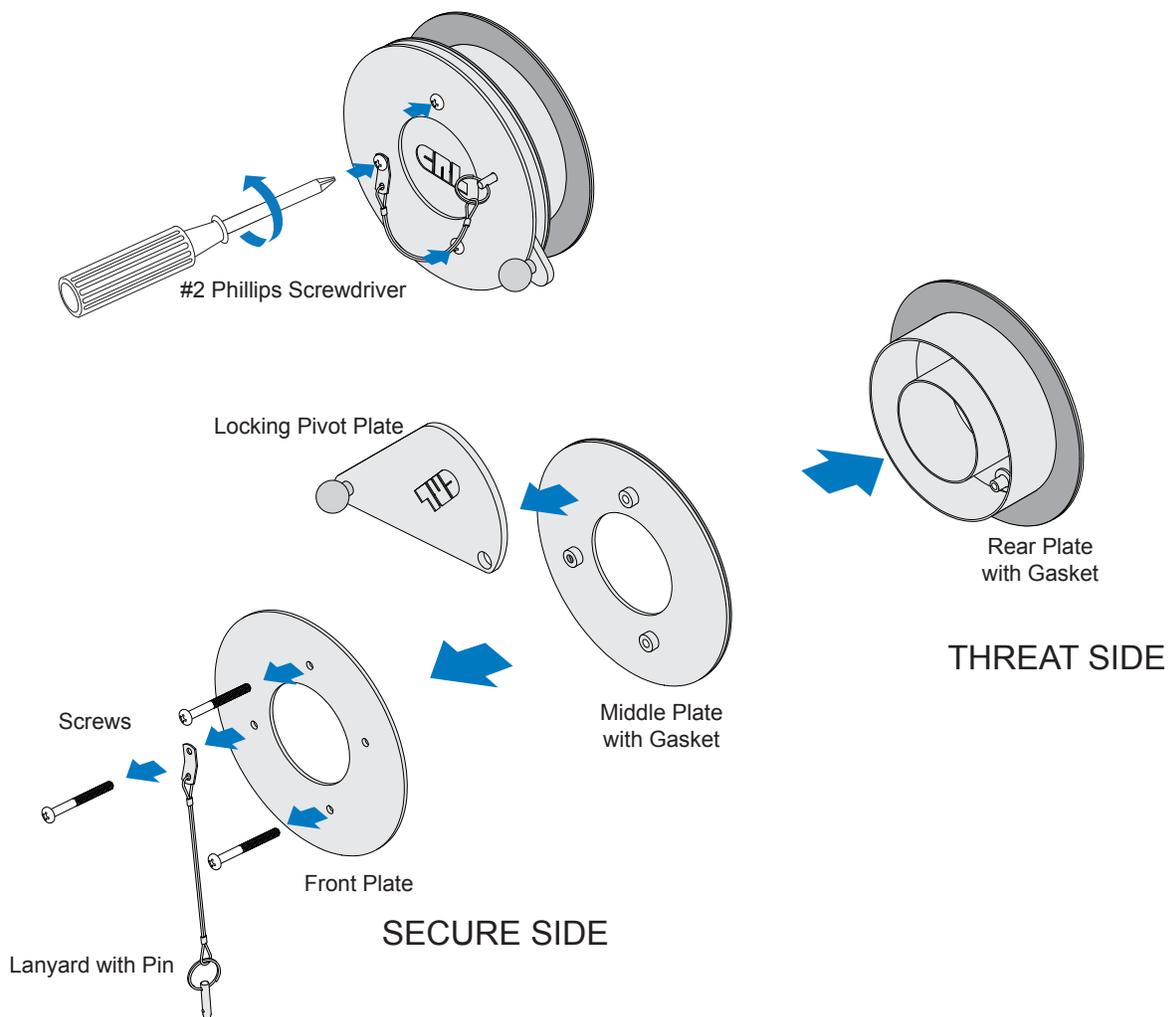


INSTALLATION

Insert Rear Plate with Gasket into opening from Threat Side of glass.

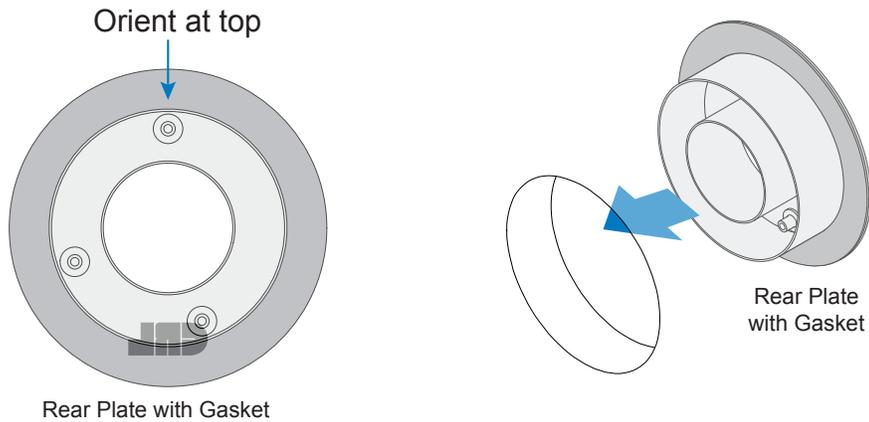

NOTE: CRL logo is centered at bottom of Threat Side when installed.

Align screw holes in parts and center in opening. Tighten screws evenly but do not overtighten.

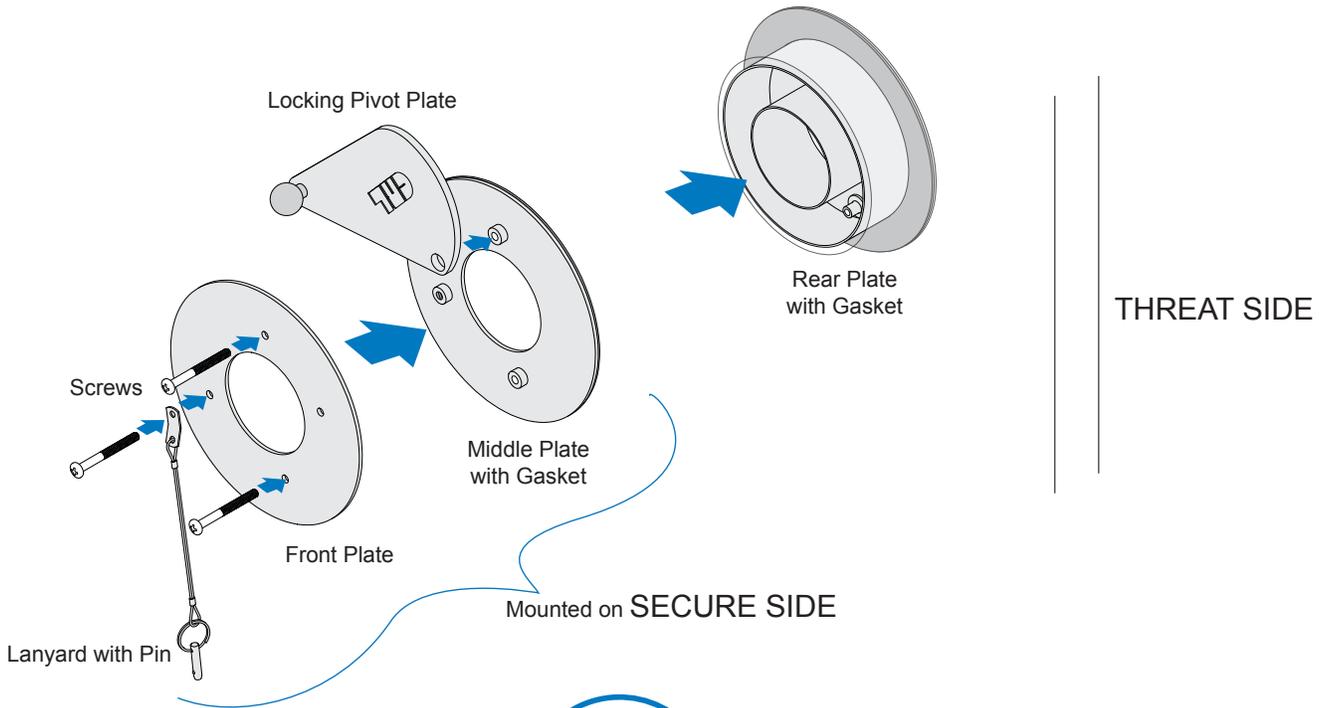

Swing Locking Pivot Plate closed and insert Pin to lock.

