



The calm before, during, and after the storm

StormMax[®] Hurricane-Resistant Storefront

FG-5700 StormMax[®] | FG-5750 StormMax[®] | FG-5750T StormMax[®]



Sloped window is a curtain wall. Bottom floor of building depicts a storefront and entrance.

StormMax® Category 5 Protection

Our fully upgraded framing system stands up to wind, water, projectiles, and project headaches. We sweat every detail in our system and every step in the process – from bid to installation – so you don't have to. With StormMax®, you and your building are prepared to weather any storm.

TOUGHNESS, VERIFIED

Large and small missile impact tests – up to Missile Level D
ASTM E 1886 and ASTM E 1996
Category 5 Wind Zone and Florida HVHZ
Florida Building Codes TAS 201, TAS 202, TAS 203
Certified for Florida Product Approvals and Texas Department of Insurance (TDI) Product Evaluations

BETTER PRODUCT

Simplified anchoring options allow for faster, easier installations
Pre-glazing reduces labor costs and accelerates installation
Inside glazing capability is ideal for dense urban areas and above-grade applications
Aluminum reinforcing option is lighter, easier to work with, and easier to drill
A broad offering of hurricane-impact- tested interlayers to weather what each job demands

BETTER PROCESS

Easy, on-demand access to TDI and FPA documents for simpler bid submissions
Save time and money by customizing the protection you need – from glass to anchors to reinforcing
Single-source capability allows you to pair a wide variety of StormMax® storefronts with the right glass infill for your project
Fully integrated solutions ensure your complete system is ready right when you need it

PROTECTION IS IN THE DETAILS




FG-5700 StormMax®

2 1/2" x 5"

12' Span

9/16" Laminated Infill

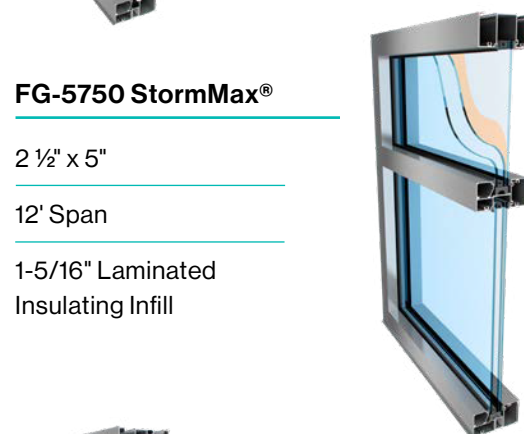

FG-5750 StormMax®

2 1/2" x 5"

12' Span

1-5/16" Laminated
Insulating Infill



FG-5750T StormMax®

2 1/2" x 5"

12' Span

1-5/16" Laminated
Insulating Infill