

## TRIANON

Wall Mount Hinge – Standard Back Plate

CAT. NO. TR1037

**\*NOTE:** Do not exceed either maximum weight or width when choosing proper quantity of hinges.

### Important Information:

The door template is a cutout plus a hole. The fixed panel template is holes only.

### Specifications:

Glass Sizes: 1/4" (6mm) to 5/16" (8mm) thick tempered safety glass  
 Construction: Solid brass  
 Closing Type: Self-centering when within 15° of closed position  
 Cutout Required  
 Includes: Gaskets, screws and template

### Maximum Door Capacities for Two Hinges or Three Hinges

Maximum Door Weight:	60 lbs. (27 kg)	90 lbs. (41 kg)
Maximum Door Width:	28" (711mm)	32" (813mm)

### Use of Gaskets:

For 1/4" (6mm) Glass: Use one thick gasket on each side  
 For 5/16" (8mm) Glass: Use one thin gasket on each side


### Recommendations:

For public safety, we recommend the use of only tempered safety glass.  
 Do not use power tools when installing these hinges.

### Maintenance Guidelines:

- Never use an abrasive cleaner on the hardware. Many of the components are coated with a clear lacquer that will be irreparably damaged if subjected to harsh, abrasive chemicals. Advise your customer that drying the hardware with a clean, soft towel on a daily basis is the best way to maintain the hardware. If mineral deposits build-up, mix a couple of drops of a mild liquid soap (such as Ivory or a similar product) into a cup of warm water. Using a soft, non-abrasive cloth, clean the hardware. Rinse thoroughly with clean warm water and dry.

**IMPORTANT:** Project measurements from the edge of the glass.

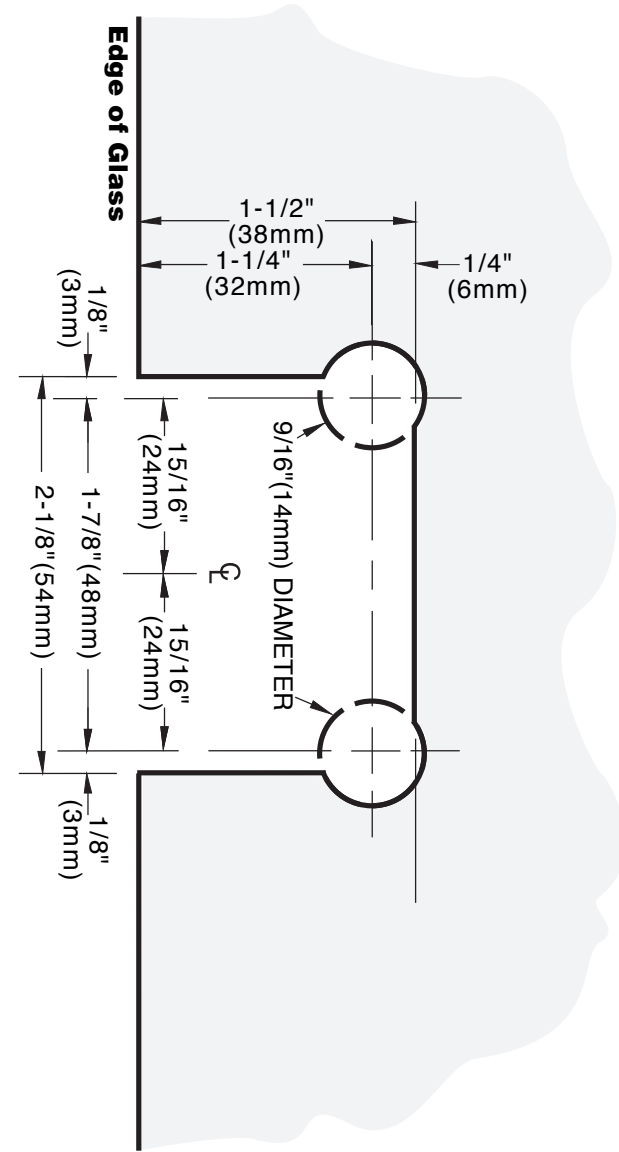

## TRIANON

Wall Mount Hinge – Standard Back Plate

CAT. NO. TR1037