



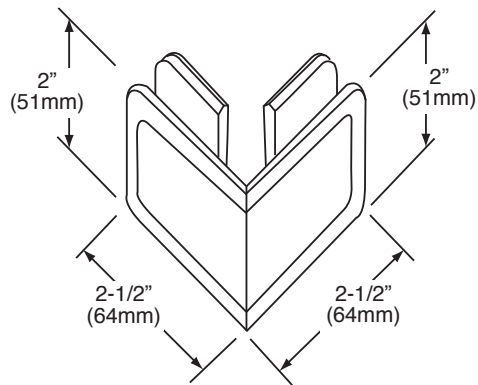

FRONT VIEW



REAR VIEW

Specifications:


Material:	Solid brass
Glass Thickness Range:	3/8"(10mm) to 1/2"(12mm)
Hole Size Required:	3/4" (19mm)
Includes:	Mounting screws and gaskets

Template Shown on Next Page


HEAVY DUTY GLASS CLAMPS

90° Glass Clamp (Glass-to-Glass Application)

CAT. NO. BGC90

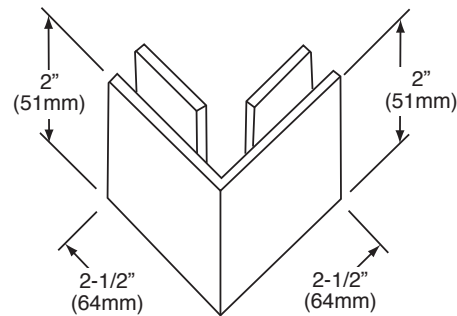

FRONT VIEW



REAR VIEW

Specifications:

Material:	Solid brass
Glass Thickness Range:	3/8"(10mm) to 1/2"(12mm)
Hole Size Required:	3/4" (19mm)
Includes:	Mounting screws and gaskets

Template Shown on Next Page



HEAVY DUTY GLASS CLAMPS

90° Glass Clamp (Glass-to-Glass Application)

CAT. NO. SGC90



IMPORTANT: Project measurements from the edge of the glass.

TYPICAL INSTALLATION

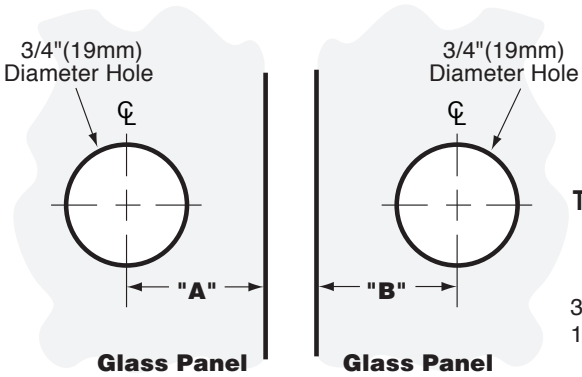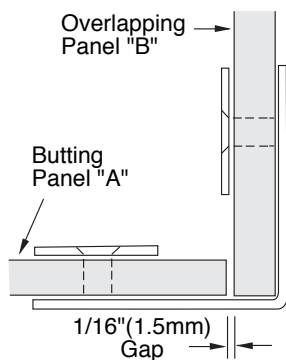

Glass Thickness	"A"* Measurement	"B"* Measurement
3/8"(10mm)	1-3/16"(30mm)	1-5/8"(41mm)
1/2"(12mm)	1-1/16"(27mm)	1-5/8"(41mm)

**TEMPLATE OPTION FOR 45° MITERED GLASS
TYPICAL INSTALLATION**

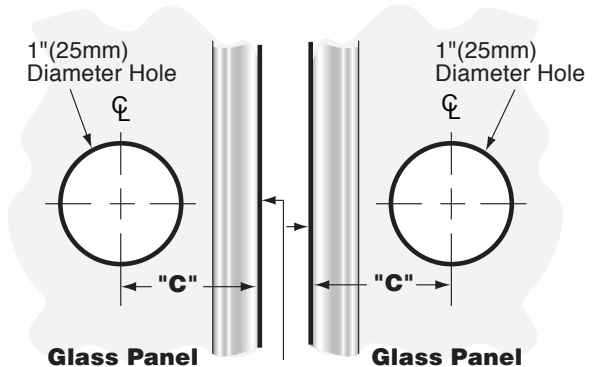

Glass Thickness	"C"* Measurement
3/8"(10mm)	1-9/16" (39.7 mm)
1/2"(12mm)	1-9/16" (39.7 mm)

Outside Edge of Miter

 ALWAYS USE DIMENSIONS TO ENSURE ACCURACY

GLASS CLAMPS

The Template Options on This Page Apply to the Following Clamps:

90° Glass Clamp (Glass-to-Glass Application) | 90° Glass Clamp
CAT. NO. BGC90 | CAT. NO. SGC90