
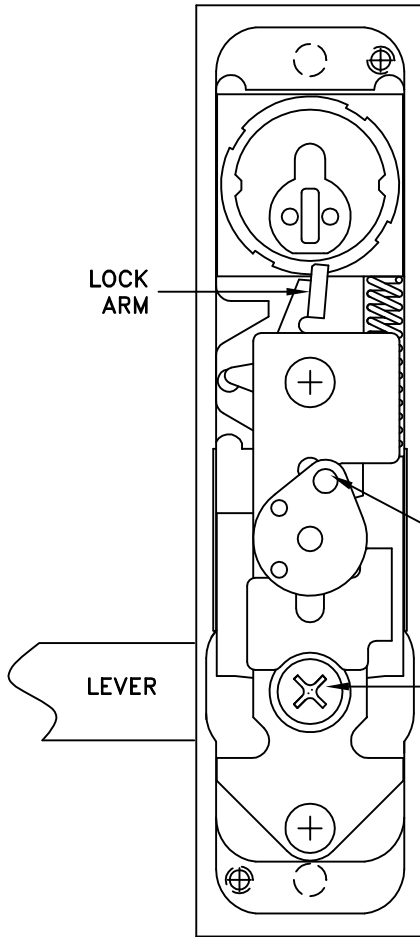


1285,2085,2086 LEVER TRIM

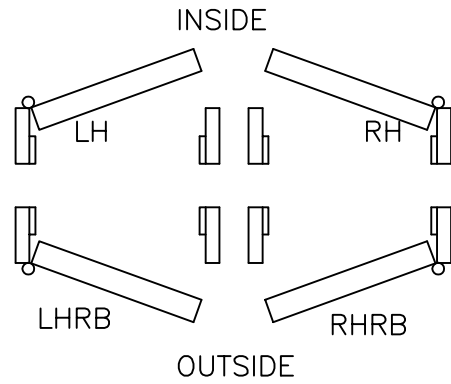

RECOMMENDED CYLINDERS AND CAMS


CYLINDER	CAM
YALE	1161-L
CORBIN	MS-4800
RUSSWIN	MS-4600
SCHLAGE	B 502-292
ILCO	4002-2R LOCKWOOD
SARGENT	47-40-101
ADAMS RITE	MS-1850

LEVER SHOWN (RHRB)

IF NECESSARY ROTATE THIS COMPONENT ANTI-CLOCKWISE TO THE POSITION SHOWN BEFORE INSTALLATION

TO CHANGE THE HAND OF THE TRIM REMOVE THIS SCREW AND REVERSE LEVER

ENSURE THAT THE CYLINDER AND CAM OPERATE THE LOCK ARM PRIOR TO INSTALLATION

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMAL DIMENSIONS .XX ± .010 DECIMAL DIMENSIONS .XXX ± .005 ANGULAR ± ° FRACTIONAL ± 1/64		APPROVALS APPROVED CHECKED DRAWN R.M. 05/11/00	DATE 05/11/00	 3447 UNION PACIFIC AVE. LOS ANGELES, CALIF. 90023
FILE NO.	MATERIAL	SCALE FULL		
NEXT ASSY.	FINISH	OUTSIDE TRIM HANDING SELECTION GUIDE		
QTY. USED 1	HEAT TREAT	1285,2085,2086		SHEET 1 OF 1 SHEETS DWG. NO. 10-990 REV. A