

CRL OFFSET DOOR PATCH

Door Top or Bottom Patch

Cat. No. OPF20L, OPF20R, OPF10L, OPF10R

*Maximum Capacities	3/8" (10 mm)		1/2" (12 mm)	
	Weight	Door Width	Weight	Door Width
Top & Bottom Patches	176 lbs. (80 kg)	43-3/8" (1100 mm)	176 lbs. (80 kg)	43-3/8" (1100 mm)

NOTE: Both weight and door width capacities must be met when determining door size.

Important Information:

The CRL Offset Door Patch is designed to allow the doors to be able to swing a full 180°. The center of the pivot point is measured from the centerline of glass out and from the edge of the opening in. These patches can be used only on single acting doors.

Minimum Bottom Door Clearances

Pivot or Floor Closer Cat. No.	OPF10 Bottom Patch	CRL Offset Door Rail
Floor Closer	1/4" (6.35 mm)	1/4" (6.35 mm)
1NT402 Bottom Pivot	7/16" (11.5 mm)	7/16" (11.5 mm)
1NT403 Adj. Bottom Pivot	3/8" (9.5 mm)	N/A
1NT406 Adj. Bottom Pivot	1/4" (6.35 mm)	1/4" (6.35 mm)

Specifications:

Glass Sizes: 3/8" (10 mm) to 1/2" (12 mm) Thick Tempered Safety Glass

Construction: High Density Casting

Glass Fabrication Required: Cut-Out and Hole Required - See Reverse

Includes: Screws and Gaskets for 3/8" (10 mm) and 1/2" (12 mm) Glass

Available Patches:

- OPF10L
- OPF10R
- OPF20L
- OPF20R

Available Finishes:

- Brushed Stainless Steel
- Polished Stainless Steel



Use of Gaskets:

For 3/8" (10 mm) Glass: Use two gaskets on each side


For 1/2" (12 mm) Glass: Use one gasket on each side

Recommendations:



For public safety, we recommend the use of tempered safety glass only

SEE TEMPLATE ON BACK

Refer to Dimensions Shown to Ensure Accuracy

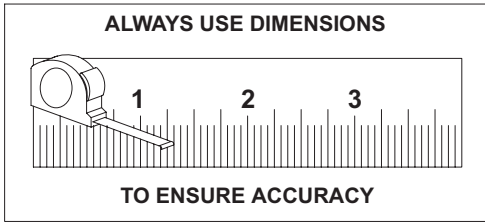

NOT TO SCALE

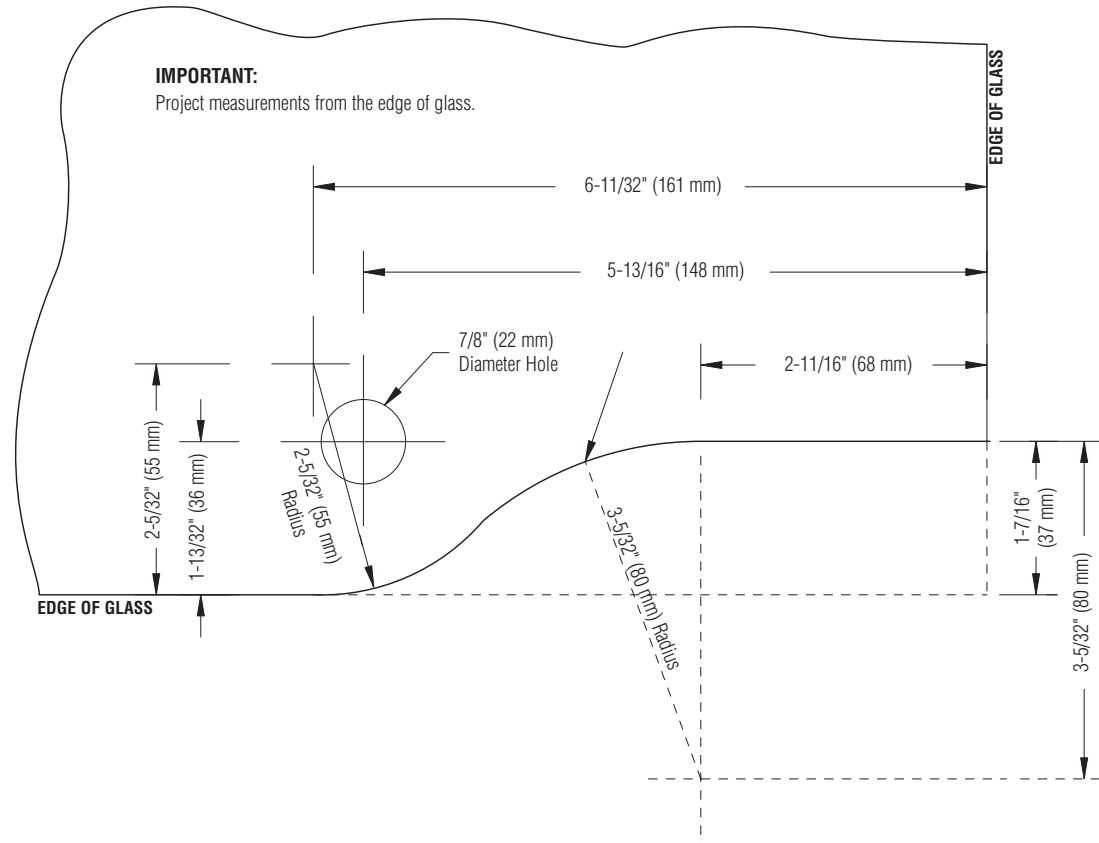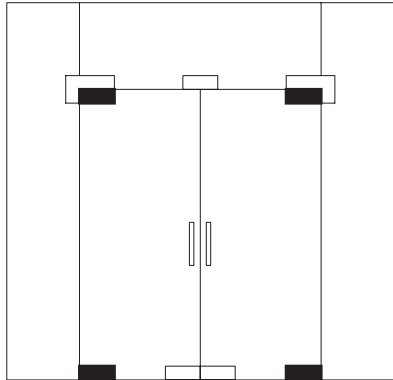

CRL OFFSET DOOR PATCH

Offset Pivot Door Top and Bottom Patch

Applicable to Cat. No.: OPF20L, OPF20R, OPF10L, OPF10R

